JIANGMEN RAYNICE LIGHTING CO.,LTD

FACTORY
NO.11 MingHui Road,High-tech industrial zones,JiangMen City,GuangDong Province,China
Tel: (+86) 0750-8522688 Fax: (+86) 0750-8529704

SHOWROOM
B01-05, 10th Floor, Star Alliance, Guzhen Town, Zhongshan City

E-mail:raynice@raynice.com
Http://www.raynice.com

RAYNICE

INTERIOR SPACE ART LIGHTING

INTERIOR SPACE ART LIGHTING

RAYNICE

RAYNICE LIGHTING 2025 II

COMPANY INTRODUCTION

Raynice Lighting, is positioning the leading, unique, high-grade products as the brand of "delicately exuding the charm" . The company was established in 2005, which located in the west of China Lighting Capital-Jiangmen high-tech zone, with 30000 square meters of industrial park, focusing on lighting researching and manufacturing the Lighting appliances, and constantly introducing the world advanced production equipment and perfect management system, adopting the synchronous international standard-quality to manage. By researching and importing the last trend of development core technology and product design, it energetically develops the LED technology and the energy saving

environment products, which has been leading the trend of the lighting markets and product developments. The company has guide into a ERP management system to standard the whole manufacture operation, which has passed the whole ISO9001 quality management system certification, and the products has passed the 3 C, CE, CB, VDE authentication and ROHS, etc. Our network has been throughout the river north and south, and the products has been exported to southeast Asia and the European and American market.



RAYNICE®









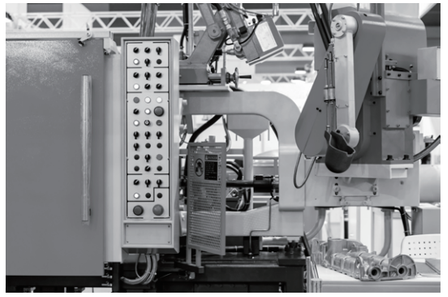

The company is in the specialized production of commercial lighting, engineering lighting, home lighting, lighting electric series products. The products have covered five series: Yinrui series include down light, ceiling light, bean pot lamp, spotlight, halogen lamp and wall washer light. Jingrui series include LED ceiling light, LED down light, LED wall lamp, LED spotlight, LED hanging light, LED corner lamp , LED grille spotlight, LED rope light, LED jewelry lamp. LED outdoor lamp, LED light source and LED drive. Mingrui series lattice lights include grille surface, T5 stents, mine lamp and supermarket lamp. Xinrui series include energy-saving lamps, electronic transformer, inductance ballasts, quartz light cup, energy-saving lamp cup, metal halide light source, metal halide electric appliance box and rail lamp. Porui series include A6 engineering switch, T9 luxury switch and K6 classic switch.

Raynice is targeted at the "Chinese lighting lamps and lanterns high-end brands", which determined how best to develop for the band "with professional to drive lighting technology and become technology and designing leading-edge light specialist" as a new strategy. "Quality First, Customer Priority, Scientific Management, Pragmatic Innovation" always as the company quality policy, then it provides a leading design, humanity lighting technology and reliable quality lighting products for that people which pursuing high quality light environment. Raynice providing not only high quality products for customers, also the leading 3 R Sincere-without service system, which created a faith, rapid, secure service brand for customers.

LIST

LED RECESSED SPOTLIGHT SERIES / 001-196

GELATO

001-004

GEO

005-014

PANDORA

015-024

GRIS

025-036

THUN

037-044

SIENA

045-048

GEMINI

049-050

FANO

051-054

MODICA

055-058

COMO

059-060

ROME

061-062

COLORFUL

063-064

COLLTE

065-066

TULLIO

067-078

ELF

079-084

RIMINI

085-092

PICCOLO

093-098

RIETI

099-106

TRANSFORMERS

107-110

SORI

111-112

VENICE

113-116

HELEN

117-120

GRID

121-122

TOMMASO

123-124

GRIYA

125-1140

CUBE

141-146

FOCUS

147-150

SUN

151-158

DIX

159-162

SIRMI

163-166

MERLANO

167-172

MARCO

173-176

WATER

177-186

GUNTER

187-192

LODI

193-196

LED WALL WASHER LIGHT SERIES / 197-222

SARDIN

197-206

MILAN

207-212

PACO

213-214

AUGE

215-216

VERONA

217-218

DRO

219-220

ORLANDO

221-222

LIST

LED SURFACE-MOUNTED SPOTLIGHT SERIES / 223-252

LECCO

223-236

PARMA

237-240

ENNA

241-242

MODENA

243-244

BARI

245-246

NICOLA

247-248

LUCCA

249-250

ASTI

251-252

LED RECESSED DOWNLIGHT SERIES / 253-266

TORINO

253-256

KONYA

257-258

EQUAL

259-260

TURIN

261-266

LED SURFACE-MOUNTED DOWNLIGHT SERIES / 267-270

RAVENNA

267-270

LED TRACK LIGHT SERIES / 271-290

BONN

271-276

VARY

277-280

PIRA

281-282

MILO

283-284

RICCI

285-286

PERIS

287-290

LIST

LED CELING LIGHT SERIES / 291-310

CARLO



291-298

MACARON



299-310

LED HANGING LIGHT SERIES / 311-330

ANCO



311-320

VERDUN



321-322

MILK



323-324

DIY



325-326

ROMEO



327-330

LED WALL LIGHT SERIES / 331-336

JUNGLE



331-336

LED FLOOR LIGHT SERIES / 337-430

TRANI



337-350

BECK



351-358

VELA



359-366

ROSA



367-382

ALICE



383-386

GARDENA



387-394

ANNA



395-398

ADA



399-400

SELINI



410-402

CLOUD



403-410

EVE



411-412

TIME



413-414

MAIEN



415-416

METZ



417-418

LIST

ANZA



419-4422

JULIA



423-426

NELLO



427-428

LARRY



429-430

CORSICA



431-436

LED TABLE LIGHT SERIES / 437-474

IVAN



437-448

SETTING SUN



449-454

SIGNAL



455-458

GRADA



459-470

SKYLIME



471-474

LED STRIP LIGHT SERIES / 475-480

STRIP



475-480

LED LINEAR LIGHT SERIES / 481-486

LINE



481-486

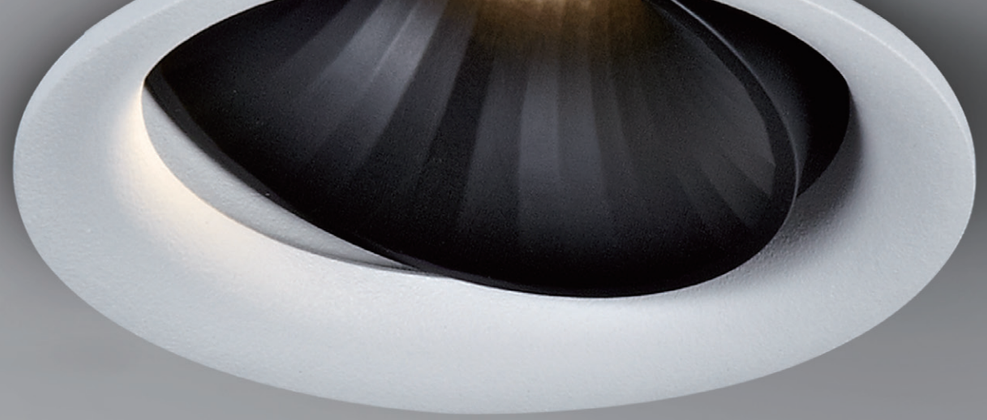



LED RECESSED SPOTLIGHT

SERIES



001





002

GELATO













GELATO

















SL74244/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 410Lm
Angle: 24°/18°/30°
CTN: 30
Material: Aluminum

SL74245/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 873Lm
Angle: 24°/18°/30°
CTN: 30
Material: Aluminum

SL74252/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 410Lm
Angle: 24°/18°/30°
CTN: 30
Material: Aluminum

SL74253/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 873Lm
Angle: 24°/18°/30°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black
Sand Black+Silver

IP 20 | CRI 90

GEO





GEO







SL74299/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 406Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

SL74300/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 663Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black

IP	CRI
20	90

GEO











SL74297/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 406Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

SL74298/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 663Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black

IP 20

CRI 90

GEO















SL74318/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 406Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

SL74319/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 663Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black

IP 20

CRI 90

GEO





GEO







SL74342/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 406Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

SL74343/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 663Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black

IP 20

CRI 90



GEO

GEO



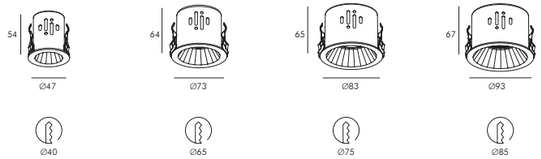

SL74543–2/3W

LED: Luminus COB
Power: 3W
Flux(Lm): 166Lm
Angle: 24°/36°
CTN: 50
Material: Aluminum+Iron

SL74543–2.5/7W

LED: Luminus COB
Power: 7W
Flux(Lm): 460Lm
Angle: 24°/36°
CTN: 30
Material: Aluminum+Iron

SL74543–3/10W

LED: Luminus COB
Power: 10W
Flux(Lm): 650Lm
Angle: 24°/36°
CTN: 30
Material: Aluminum+Iron

SL74543–3.5/15W

LED: Luminus COB
Power: 15W
Flux(Lm): 1035Lm
Angle: 36°
CTN: 30
Material: Aluminum+Iron

Colortemperature

2700K 3000K 4000K 5000K

Color

Matt White
Matt Black
Gold

IP 20

CRI 90



GEO

GEO



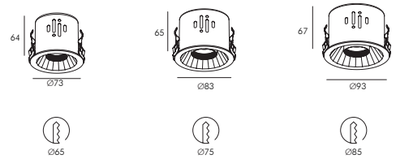

SL74545–2.5/7W

LED: Luminus COB
Power: 7W
Flux(Lm): 408Lm
Angle: 20°/30°/36°
CTN: 30
Material: Aluminum+Iron

SL74545–3/10W

LED: Luminus COB
Power: 10W
Flux(Lm): 682Lm
Angle: 20°/30°/36°
CTN: 30
Material: Aluminum+Iron

SL745453.5/15W

LED: Luminus COB
Power: 15W
Flux(Lm): 875Lm
Angle: 20°/24°/36°
CTN: 30
Material: Aluminum+Iron

Colortemperature

2700K 3000K 4000K 5000K

Color

Matt White+Black
Gold+Black
Matt Black

IP 20

CRI 90



PANDORA





PANDORA









SL74232/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 801Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

SL74233/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 801Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color (SL74232)

Sand white
Sand black

Color (SL74233)

Sand white Sand black
Sand White+Black

IP 20

CRI 90

PANDORA









SL74267/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1399Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

SL74268/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1399Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color (SL74267)

Sand white
Sand black

Color (SL74268)

Sand white Sand black
Sand White+Black

IP 20

CRI 90

PANDORA









SL74236/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 813Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

SL74237/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 813Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand white
Sand black

IP	CRI
20	90

PANDORA





PANDORA









SL74269/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1399Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

SL74270/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1399Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 20

CRI 90

PANDORA







SL74240/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 652Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand white
Sand black
Sand White+Black

IP 20

CRI 90



PANDORA

PANDORA







SL74238/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 766Lm
Angle: 24°/15°/35°
CTN: 50
Material: Aluminum



SL74239/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 714Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand white

IP 20 CRI 90







SL74271/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1328Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum



SL74272/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1328Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP 20 CRI 90

GRIS



GRIS















SL74537–1/1 x 3W

LED: Luminus SMD
Power: 1x3W
Flux(Lm): 210Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

SL74537–2/2 x 3W

LED: Luminus SMD
Power: 2x3W
Flux(Lm): 412Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

SL74537–3/3 x 3W

LED: Luminus SMD
Power: 3x3W
Flux(Lm): 640Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Coffce+Black
Green Gery+Black

IP 20

CRI 90

GRIS

GRIS



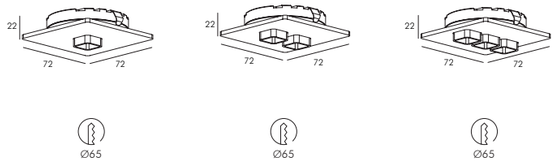

SL74538–1/1 x 3W

LED: Luminus SMD
Power: 1x3W
Flux(Lm): 210Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

SL74538–2/2 x 3W

LED: Luminus SMD
Power: 2x3W
Flux(Lm): 412Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

SL74538–3/3 x 3W

LED: Luminus SMD
Power: 3x3W
Flux(Lm): 640Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Coffce+Black
Green Gery+Black

IP 20

CRI 90

GRIS



GRIS











SL74505/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 210Lm
Angle: 15°/20°/30°
CTN: 30
Material: Aluminum

SL74506/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 322Lm
Angle: 10°/20°/30°
CTN: 30
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Matt White+Black
Matt Black

IP 20

CRI 90

GRIS









80x80



80x140



80x205

GL7131–1/1 x 7W

LED: Bridgelux COB
Power: 1x7W
Flux(Lm): 210Lm
Angle: 15°/20°/30°
CTN: 30
Material: Aluminum

GL7131–2/2 x 7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 454Lm
Angle: 15°/20°/30°
CTN: 20
Material: Aluminum

GL7131–3/3 x 7W

LED: Bridgelux COB
Power: 3x7W
Flux(Lm): 660Lm
Angle: 15°/20°/30°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP	CRI
20	90

GRIS







SLC78080/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 210Lm
Angle: 15°/20°/30°
CTN: 30
Material: Aluminum

SLC78081/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 322Lm
Angle: 10°/20°/30°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Matt White+Black
Matt Black

IP	CRI
20	90

GRIS







GRIS









GRIS

GRIS







SL74090–1/1 × 10W

LED: Bridgelux COB
Power: 1x10W
Flux(Lm): 612Lm
Angle: 24°/20°/35°
CTN: 30
Material: Aluminum



SL74090–2/2 × 10W

LED: Bridgelux COB
Power: 2x10W
Flux(Lm): 1143Lm
Angle: 24°/20°/35°
CTN: 12
Material: Aluminum







SL74092–1/1 × 10W

LED: Bridgelux COB
Power: 1x10W
Flux(Lm): 612Lm
Angle: 24°/20°/35°
CTN: 30
Material: Iron+Aluminum



SL74092–2/2 × 10W

LED: Bridgelux COB
Power: 2x10W
Flux(Lm): 1143Lm
Angle: 24°/20°/35°
CTN: 18
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black
Sand White+Black

IP 20

CRI 90



THUN

THUN



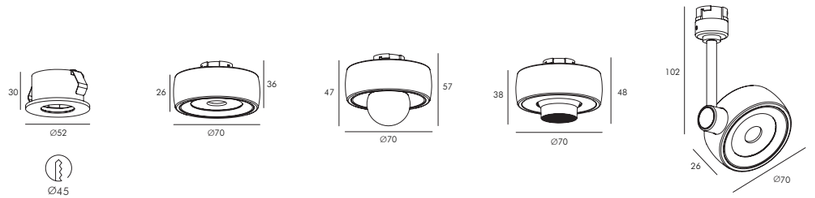

SL74378

Power: 7W
Input:AC220V
Output:DC36V 150mA
CTN: 30
Material: Aluminum

SL74378–MZ01/7W

LED: Luminus COB
Power: 7W
Input:DC36V 150mA
Flux(Lm): 460Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74378–MZ02/7W

LED: Luminus COB
Power: 7W
Input:DC36V 150mA
Flux(Lm): 336Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74378–MZ03/7W

LED: Luminus COB
Power: 7W
Input:DC36V 150mA
Flux(Lm): 425Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74378–MZ04/7W

LED: Luminus COB
Power: 7W
Input:DC36V 150mA
Flux(Lm): 485Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color (SL74378)

Sand white

Color (SL74378-MZ01/02/03/04)

Sand White+Black

IP 20

CRI 90



THUN

THUN





SLC78105

Power: 9W
Input:AC220V
Output:DC36V 200mA
CTN: 30
Material: Aluminum

SLC78105–MZ01/9W

LED: Luminus COB
Power: 9W
Input:DC36V 200mA
Flux(Lm): 558Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SLC78105–MZ02/9W

LED: Luminus COB
Power: 9W
Input:DC36V 200mA
Flux(Lm): 382Lm
Angle: 35°
CTN: 30
Material: Aluminum

SLC78105–MZ03/9W

LED: Luminus COB
Power: 9W
Input:DC36V 200mA
Flux(Lm): 565Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color (SL78105)

Sand white

Color (SL78105-MZ01/02/03)

Sand White+Black

IP	CRI
20	90

THUN









SL74135 Base

Power: 15W
Output:DC24V
CTN: 30
Material: Aluminum+PC

Color

Sand White

IP 20 | DC 24V

THUN









SL74135–MZ01/10W

LED: LatticePower SMD
Power: 10W
Input:DC24V
Flux(Lm): 683Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74135–MZ02/7W

LED: LatticePower SMD
Power: 7W
Input:DC24V
Flux(Lm): 597Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color (SL74135-MZ02)

Sand White+Black

Color (SL74135-MZ03)

Sand white

IP 20 | CRI 90 | DC 24V

THUN









SL74135–MZ03/7W

LED: LatticePower SMD
Power: 7W
Input:DC24V
Flux(Lm): 405Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74135–MZ04/7W

LED: LatticePower SMD
Power: 7W
Input:DC24V
Flux(Lm): 573Lm
Angle: 35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Shiny Chrome

IP 20 | CRI 90 | DC 24V

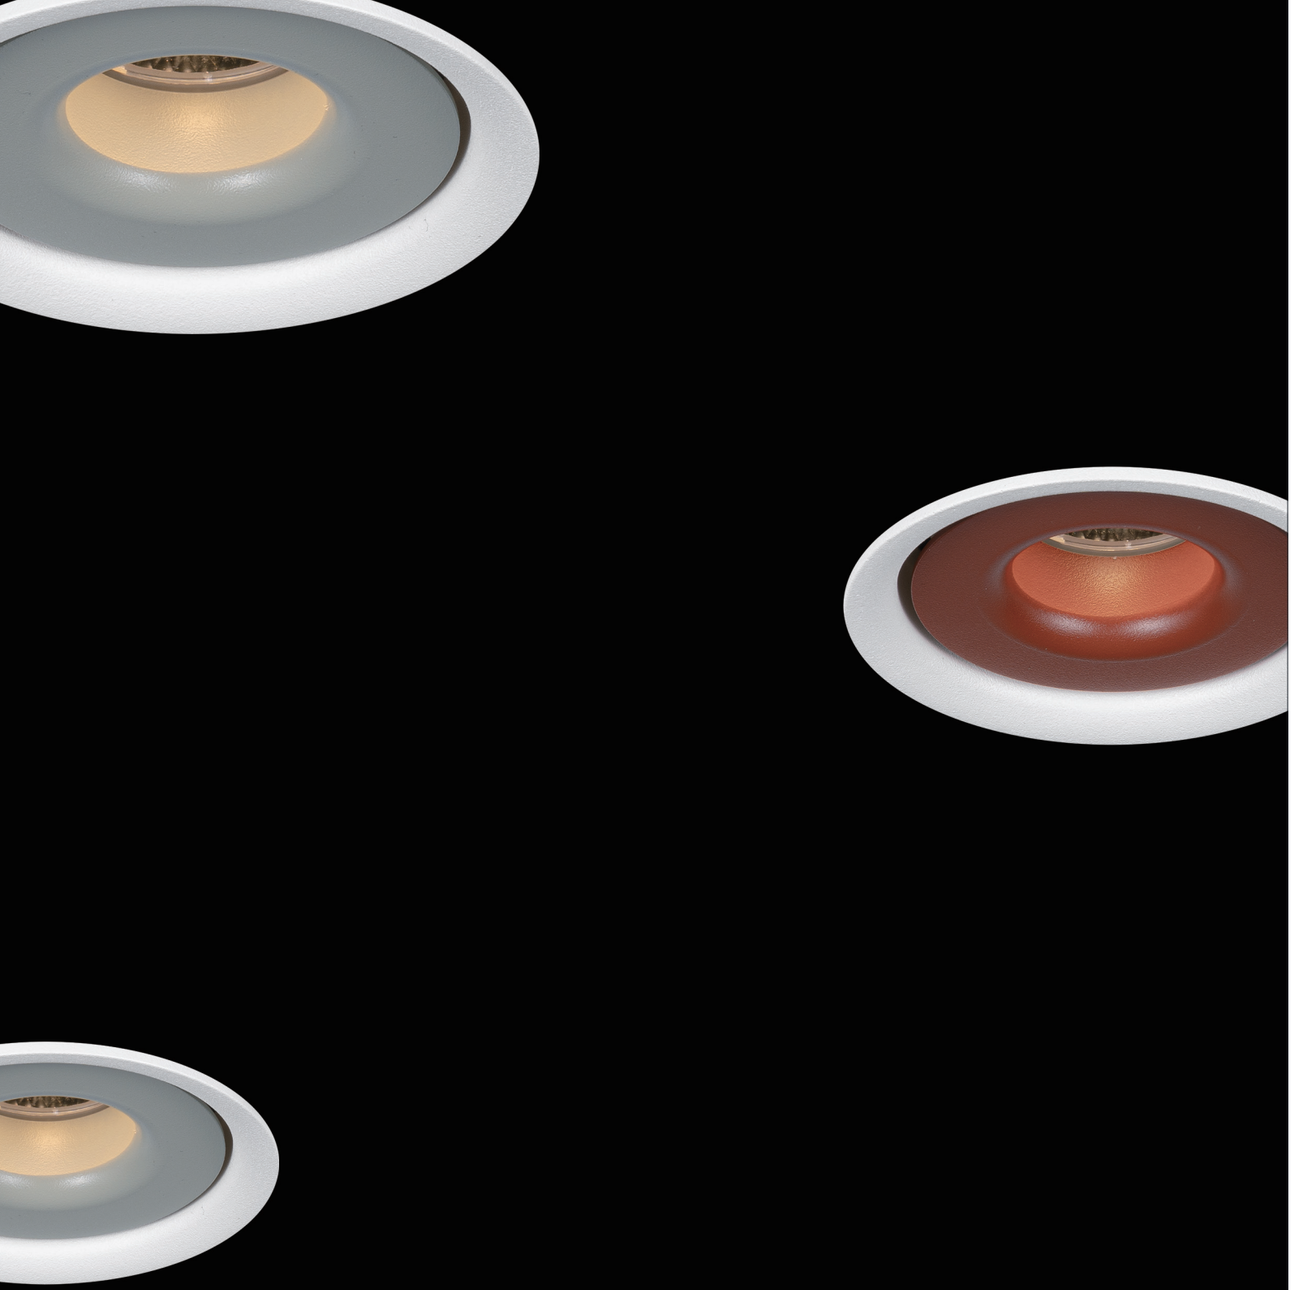

SIENA





SL74546–2.5/7W

LED: Luminus COB
Power: 7W
Flux(Lm): 478Lm
Angle: 24°/30°/40°
CTN: 50
Material: Aluminum

SL74546–3/12W

LED: Luminus COB
Power: 12W
Flux(Lm): 970Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum

SL74546–3.5/18W

LED: Luminus COB
Power: 18W
Flux(Lm): 1375Lm
Angle: 15°/20°/36°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand White+Gold
Sand White+Gery Green
Sand White+Brown

IP 20

CRI 90



SIENA









SLC78138/6W

LED: DOB
Power: 6W
Flux(Lm): 252Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum

SLC78139/12W

LED: DOB
Power: 12W
Flux(Lm): 526Lm
Angle: 30°
CTN: 30
Material: Aluminum

SLC78140/20W

LED: DOB
Power: 20W
Flux(Lm): 1252Lm
Angle: 24°/30°
CTN: 30
Material: Aluminum

Colortemperature

3000K 4000K

Color

Sand White+Black
Sand White+Gold
Sand White+Gery Green
Sand White+Brown

IP 20

CRI 90

GEMINI





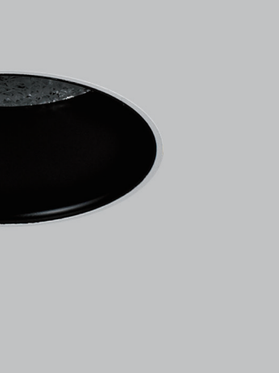

SLC78092/4W+7W

LED: OSRAM SMD/Bridgelux SMD
Power: 4W&7W
Flux(Lm): 140Lm&247Lm
Angle: 24°&75°
CTN: 12
Material: Aluminum



GEMINI





SL74344/12W

LED: Bridgelux COB/Bridgelux SMD
Power: 12W&12W
Flux(Lm): COB 656Lm/SMD 195Lm
Angle: 18°/24°36°&48°
CTN: 30
Material: Aluminum





SL74346/12W

LED: Bridgelux COB/Bridgelux SMD
Power: 12W&12W
Flux(Lm): COB 656Lm/SMD 195Lm
Angle: 18°/24°36°&48°
CTN: 20
Material: Aluminum





SL74345/12W ~ 5W

LED: LatticePower SMD/Bridgelux SMD
Power: 12W&5W
Flux(Lm): 12W 170lM/5W 187Lm
Angle: 24°/33°&43°
CTN: 30
Material: Aluminum





SL74347/12W ~ 5W

LED: LatticePower SMD/Bridgelux SMD
Power: 12W&5W
Flux(Lm): 12W 170lM/5W 187Lm
Angle: 24°/33°&43°
CTN: 20
Material: Aluminum

Colortemperature

3000K+5000K

Color

Sand White+Black

IP	CRI
20	90

COLOR

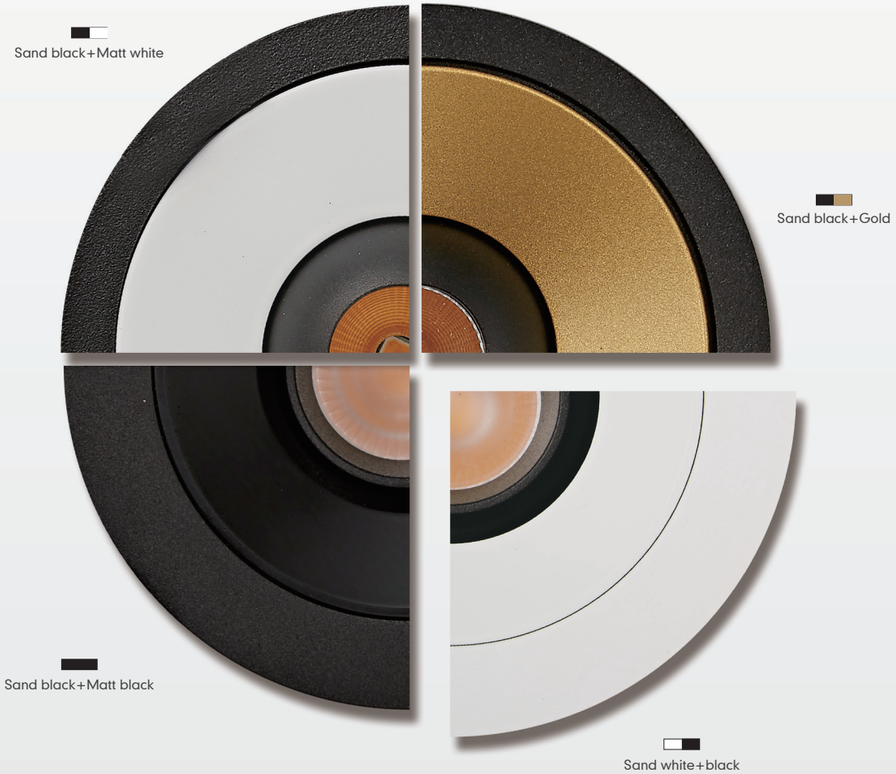

Sand black+Matt white

Sand black+Gold

Sand black+Matt black

Sand white+black

TRIMLESS

A super smooth finish combines ultimate minimalism with maximum eye comfort. This version comes with a trimless mounting kit enabling quick and precise installation and finishing.

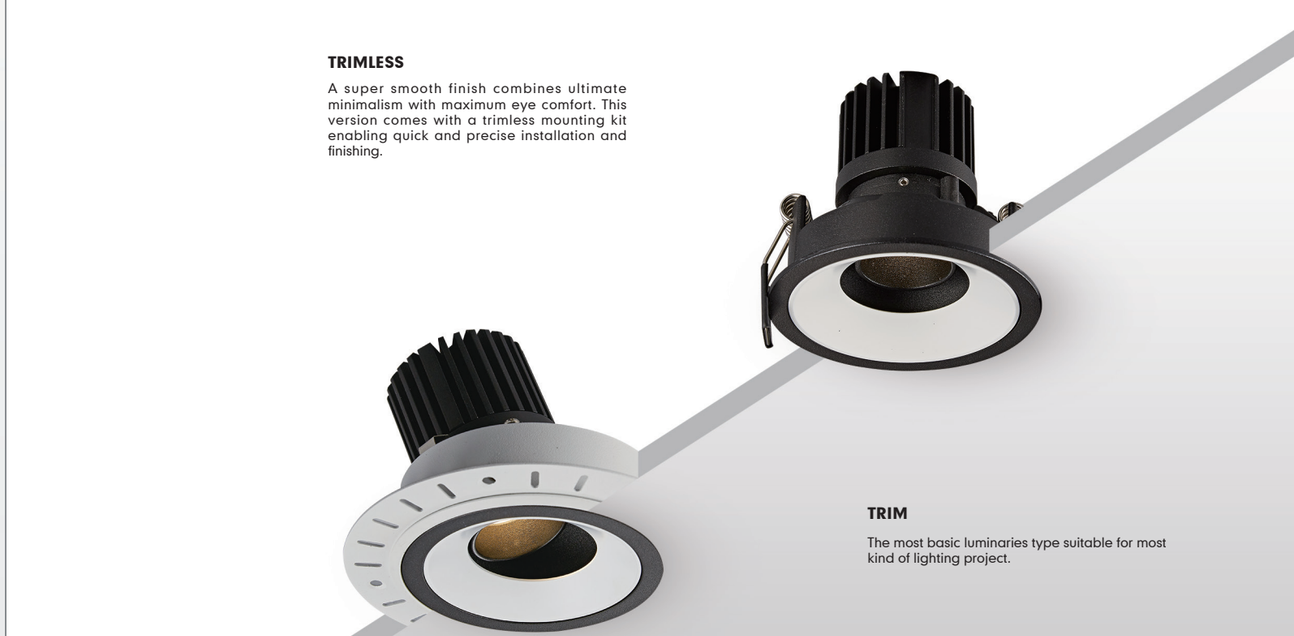

TRIM

The most basic luminaries type suitable for most kind of lighting project.

FANO







SL74170/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 377Lm
Angle: 30°/38°
CTN: 30
Material: Aluminum

SL74172/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 835Lm
Angle: 24°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand black+Matt white
Sand black+Matt black
Sand black+Gold
Sand white+black

IP 20

CRI Ra90

FANO







SL74171/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 377Lm
Angle: 30°/38°
CTN: 30
Material: Aluminum

SL74173/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 835Lm
Angle: 24°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand black+Matt white
Sand black+Matt black
Sand black+Gold
Sand white+black

IP 20

CRI Ra90











SL74174/7W

LED: Bridgelux SMD
Power: 7W
Flux(Lm): 385Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

SL74175/7W

LED: Bridgelux SMD
Power: 7W
Flux(Lm): 385Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand black+Matt white
Sand black+Matt black
Sand black+Gold
Sand white+black

IP	CRI
20	90



MODICA

MODICA










Ø55


Ø65

SL74371/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 340Lm
Angle: 24°/36°/50°
CTN: 30
Material: Aluminum

SL74387/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 482Lm
Angle: 24°/36°/50°
CTN: 30
Material: Aluminum

SLC78103/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 340Lm
Angle: 24°/36°/50°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand white
Sand black

IP 20

CRI 90



COMO

COMO



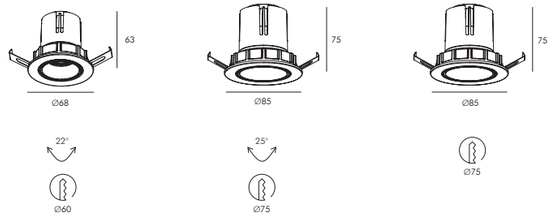

SL74075/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 375Lm
Angle: 24°/15°/35°
CTN: 50
Material: Aluminum

SL74084/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

SL74085/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand White+Gold
Sand White+Black

IP 20

CRI 90

ROME





ROME





SL74132/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 415Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74070–A/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 855Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum





SL74133/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 420Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74071–A/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 860Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand White+Black
Sand White+Gold

IP 20

CRI 90



Feel the

SUNSHINE

and enjoy the future.





SL74143/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74136/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 750Lm
Angle: 24°/15°/50°
CTN: 30
Material: Aluminum



SL74137/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 740Lm
Angle: 24°/15°/50°
CTN: 30
Material: Aluminum





SL74144/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74138/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 772Lm
Angle: 24°/15°/50°
CTN: 30
Material: Aluminum



SL74139/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 723Lm
Angle: 24°/15°/50°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand White+Black
Sand White+Gold
Sand White+Red

IP 20

CRI 90

COLLIE









SL74526/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 293Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74527/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 329Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74528/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 308Lm
Angle: 35°
CTN: 30
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP 20

CRI 90

TULLIO





TULLIO



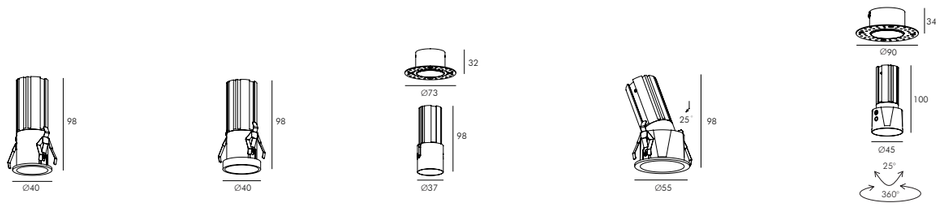

SL74381/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 515Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

Matt White+Black

SL74382/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 515Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

Matt White+Black

SL74383/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 515Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

Matt Black

SL74384/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 595Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

Matt White+Black

SL74385/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 498Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

Matt Black

Colortemperature

2700K 3000K 4000K

IP 20

CRI 90



TULLIO









SL74204/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 377Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum

SL74205/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 487Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum

SL74206/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 463Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color (SL74204)

Sand White+Black
Sand Black+White

Color (SL74205/74206)

Sand White
Sand Black

IP 20

CRI 90

TULLIO







TULLIO













SL74207/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 377Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum

SL74208/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 487Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum

SL74209/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 463Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color (SL74207)

Sand White+Black
Sand Black+White

Color (SL74208/74209)

Sand White
Sand Black

IP 20

CRI 90

TULLIO





TULLIO



















SL74210/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 332Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74211/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 337Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74213/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 286Lm
Angle: 24°/30°
CTN: 30
Material: Aluminum+Glass

Colortemperature

2700K 3000K 4000K 5000K

Color (SL74210/SL74211)

Sand White

Color (SL74213)

Sand White+Amber
Sand White+Smokey gray

IP 20

CRI 90













SL74214/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 332Lm
Angle: 35°
CTN: 30
Material: Iron+Aluminum

SL74215/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 337Lm
Angle: 35°
CTN: 30
Material: Iron+Aluminum

SL74217/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 286Lm
Angle: 24°/30°
CTN: 30
Material: Iron+Aluminum+Glass

Colortemperature

2700K 3000K 4000K 5000K

Color (SL74214/SL74215)

Sand White

Color (SL74217)

Sand White+Amber
Sand White+Smokey gray

IP 20

CRI 90

TULLIO



TULLIO





SL74218/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 399Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum



SL74219/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 399Lm
Angle: 20°/30°
CTN: 30
Material: Iron+Aluminum



SL74220/2 x 7W

LED: Bridgelux COB
Power: 2×7W
Flux(Lm): 744Lm
Angle: 20°/30°
CTN: 12
Material: Iron+Aluminum





SL74221–1/1 x 7W

LED: Bridgelux COB
Power: 1×7W
Flux(Lm): 399Lm
Angle: 20°/30°
CTN: 30
Material: Iron+Aluminum



SL74221–2/2 x 7W

LED: Bridgelux COB
Power: 2×7W
Flux(Lm): 803Lm
Angle: 20°/30°
CTN: 20
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand Black
Sand White+Black

IP 20

CRI 90

BY ELF

MANUFACTURED

FEATURE











ELF











SL74116/5W

LED: CREE SMD
Power: 5W
Flux(Lm): 399Lm
Angle: 12°
CTN: 50
Material: Aluminum

SL74117/5W

LED: CREE SMD
Power: 5W
Flux(Lm): 399Lm
Angle: 12°
CTN: 50
Material: Aluminum

SL74124/5W

LED: CREE SMD
Power: 5W
Flux(Lm): 399Lm
Angle: 12°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP	CRI
20	90

ELF









SL74118/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 175Lm
Angle: 24°/8°
CTN: 50
Material: Aluminum

SL74119/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 188Lm
Angle: 24°/8°
CTN: 50
Material: Aluminum

SL74120/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 190Lm
Angle: 24°/8°
CTN: 50
Material: Aluminum

SL74121/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 200Lm
Angle: 24°/8°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand white
Sand Black

IP	CRI
20	90



SL74123/7W

LED: LUMINUS SMD
Power: 7W
Flux(Lm): 384Lm
Angle: 4°
CTN: 30
Material: Aluminum



SL74122/7W

LED: LUMINUS SMD
Power: 7W
Flux(Lm): 426Lm
Angle: 4°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White
Sand Black

IP	CRI
20	95

ELF



ELF





Ø45



Ø60

SL74127/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 185Lm
Angle: 24°/8°
CTN: 30
Material: Aluminum

SL74128/5W

LED: CREE SMD
Power: 5W
Flux(Lm): 347Lm
Angle: 12°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP 20

CRI 90

MEET YOUR NEEDS

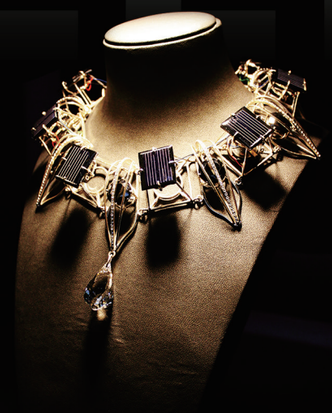














SL74158/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 108Lm
Angle: 24°/15°
CTN: 50
Material: Aluminum

SL74159/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 109Lm
Angle: 24°/15°
CTN: 50
Material: Aluminum

SL74160/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 141Lm
Angle: 8°
CTN: 50
Material: Aluminum

SL74162/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 148Lm
Angle: 24°/15°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Matt Black

IP 20

CRI 90



RIMINI

RIMINI







SL74161/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 65-78Lm
Angle: 15°-24°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Matt Black

IP 20

CRI 90

RIMINI













SL74348–1/1 x 3W

LED: OSRAM SMD
Power: 1x3W
Flux(Lm): 57Lm
Angle: 30°/15°
CTN: 50
Material: Aluminum

SL74348–2/2 x 3W

LED: OSRAM SMD
Power: 2x3W
Flux(Lm): 102Lm
Angle: 30°/15°
CTN: 50
Material: Aluminum

SL74348–4/4 x 3W

LED: OSRAM SMD
Power: 4x3W
Flux(Lm): 200Lm
Angle: 30°/15°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Matt Black
Gold

IP 20

CRI 90

RIMINI









SL74188/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 119Lm
Angle: 8°
CTN: 30
Material: Aluminum

SL74189/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 128Lm
Angle: 8°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color (SL74188)

Sand White
Sand Black

Color (SL74189)

Sand White+Black
Sand Black

IP 20

CRI 90

RIMINI



RIMINI



















SL74366/3W

LED: OSRAM SMD
Power: 3W
CTN: 50
Material: Aluminum

SL74367/3W

LED: OSRAM SMD
Power: 3W
CTN: 50
Material: Aluminum

SL74368/3W

LED: OSRAM SMD
Power: 3W
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Matt White
Matt Black

IP 20

CRI 90



PICCOLO



PICCOLO



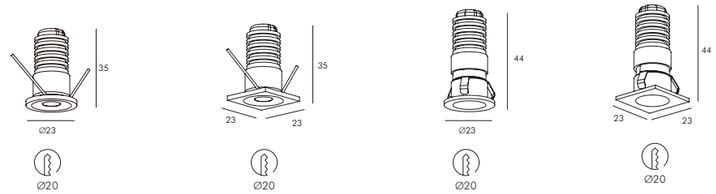

SL74178/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

SL74179/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

SL74180/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

SL74181/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Matt White
Matt Black

IP 20

CRI 90

PICCOLO



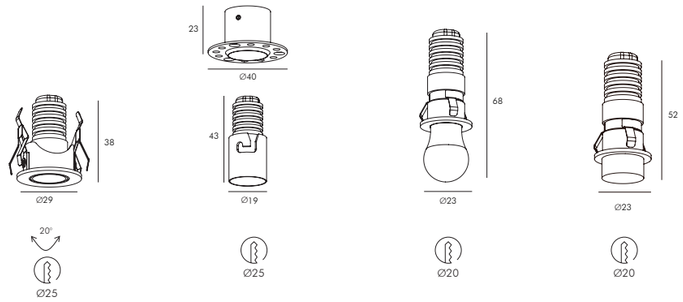

SL74182/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

SL74183/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

SL74184/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 35Lm
Angle: 24°
CTN: 50
Material: Aluminum

SL74185/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 39Lm
Angle: 45°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Matt White
Matt Black

IP 20

CRI 90

















SL74373/7W

LED: Luminus COB
Power: 7W
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74374/7W

LED: Luminus COB
Power: 7W
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74391/12W

LED: Luminus COB
Power: 12W
Angle: 24°/35°
CTN: 20
Material: Aluminum

SL74392/12W

LED: Luminus COB
Power: 12W
Angle: 24°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP 20

CRI 90



RIETI

















SL74369/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 380Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

SLC74369/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 380Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

SL74370/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 380Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum



Colortemperature

2700K 3000K 4000K

Color

Sand White+Black
Sand White+Gold

IP 20

CRI 90



RIETI









SL74386/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 938Lm
Angle: 20°
CTN: 12
Material: Aluminum

SLC74386/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 938Lm
Angle: 20°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black
Sand White+Gold
Sand Black
Sand Black+Gold

IP 20

CRI 90

RIETI

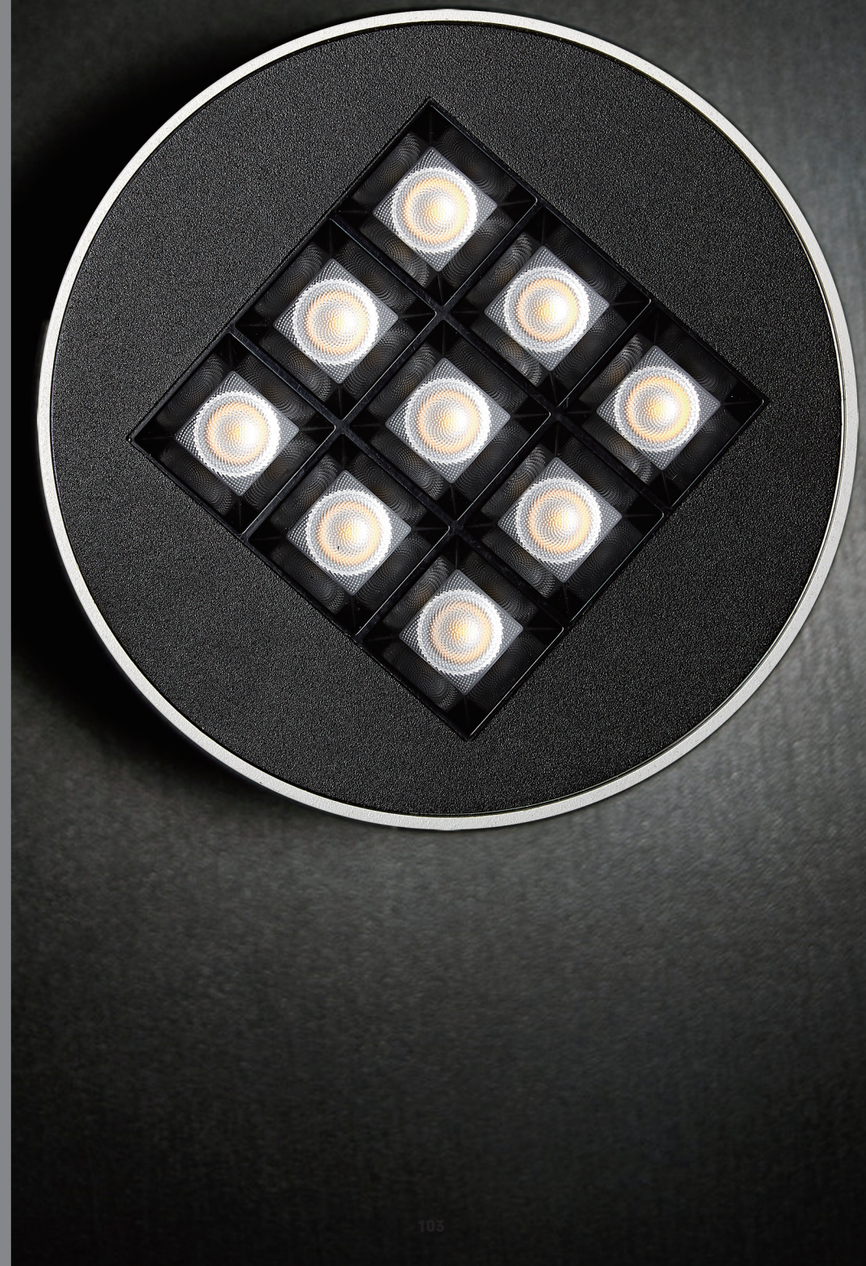

RIETI





RIETI













SL74265/4 x 2W

LED: HY SMD
Power: 4×2W
Flux(Lm): 495Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

SLC74265/4 x 2W

LED: HY SMD
Power: 4×2W
Flux(Lm): 495Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

SLC74265B/4 x 2W

LED: HY SMD
Power: 4×2W
Flux(Lm): 495Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black
Sand Black

IP 20

CRI 90

RIETI













SL74266/9 x 2W

LED: HY SMD
Power: 9×2W
Flux(Lm): 1433Lm
Angle: 24°/15°
CTN: 12
Material: Aluminum

SLC74266/9 x 2W

LED: HY SMD
Power: 9×2W
Flux(Lm): 1433Lm
Angle: 24°/15°
CTN: 12
Material: Aluminum

SLC74266B/9 x 2W

LED: HY SMD
Power: 9×2W
Flux(Lm): 1433Lm
Angle: 24°/15°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black
Sand Black

IP 20

CRI 90



TRANSFORMERS

TRANSFORMERS





SL74077/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 395Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74097/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum





SL74078/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 395Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74058/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum





SL74079/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 395Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74066/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP	CRI
20	90

TRANSFORMERS








GL7117–1/1 x 12W

LED: Bridgelux COB
Power: 1x12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum



GL7117–2/2 x 12W

LED: Bridgelux COB
Power: 2x12W
Flux(Lm): 1540Lm
Angle: 24°/15°/35°
CTN: 12
Material: Aluminum



GL7119–1/1 x 12W

LED: Bridgelux COB
Power: 1x12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum



GL7119–2/2 x 12W

LED: Bridgelux COB
Power: 2x12W
Flux(Lm): 1540Lm
Angle: 24°/15°/35°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP	CRI
20	90

TRANSFORMERS





SL74114/25W

LED: Bridgelux COB
Power: 25W
Flux(Lm): 1910Lm
Angle: 30°/15°/45°
CTN: 12
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP	CRI
20	90

IP RATINGS

IP65



SORI



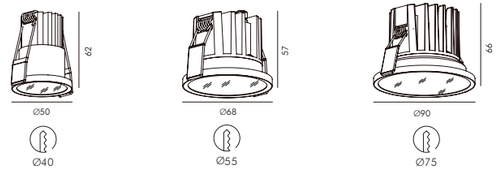

SL74522/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 326Lm
Angle: 24°/30°/35°
CTN: 30
Material: Aluminum

SL74523/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 777Lm
Angle: 24°/35°/50°
CTN: 30
Material: Aluminum

SL74524/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 1115Lm
Angle: 24°/35°/50°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP 65 | CRI 90





VENICE









Ø55

50x50

SL74530/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 477Lm
Angle: 15°/24°/45°
CTN: 30
Material: Aluminum

SL74536/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 565Lm
Angle: 15°/24°/45°
CTN: 30
Material: Aluminum

IP RATINGS

IP65

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 65 | CRI 90

VENICE









SL74535/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 635Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74531/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 740Lm
Angle: 20°/24°/55°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 65 CRI 90

VENICE













SL74532/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 336Lm
Angle: 36°/45°
CTN: 30
Material: Aluminum

SL74533/10W

LED: Luminus SMD
Power: 10W
Flux(Lm): 227Lm
Angle: 9°
CTN: 30
Material: Aluminum

SL74534/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 765Lm
Angle: 60x36°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Sand Black
Sand Black

IP 65 CRI 90

HELEN









SL74249/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 637Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74250/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 637Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 44 | CRI 90

HELEN

HELEN



HELEN









Ø75

75x75

SL74389/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 670Lm
Angle: 80×39°
CTN: 30
Material: Aluminum

SL74390/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 670Lm
Angle: 80×39°
CTN: 30
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 44

CRI 90

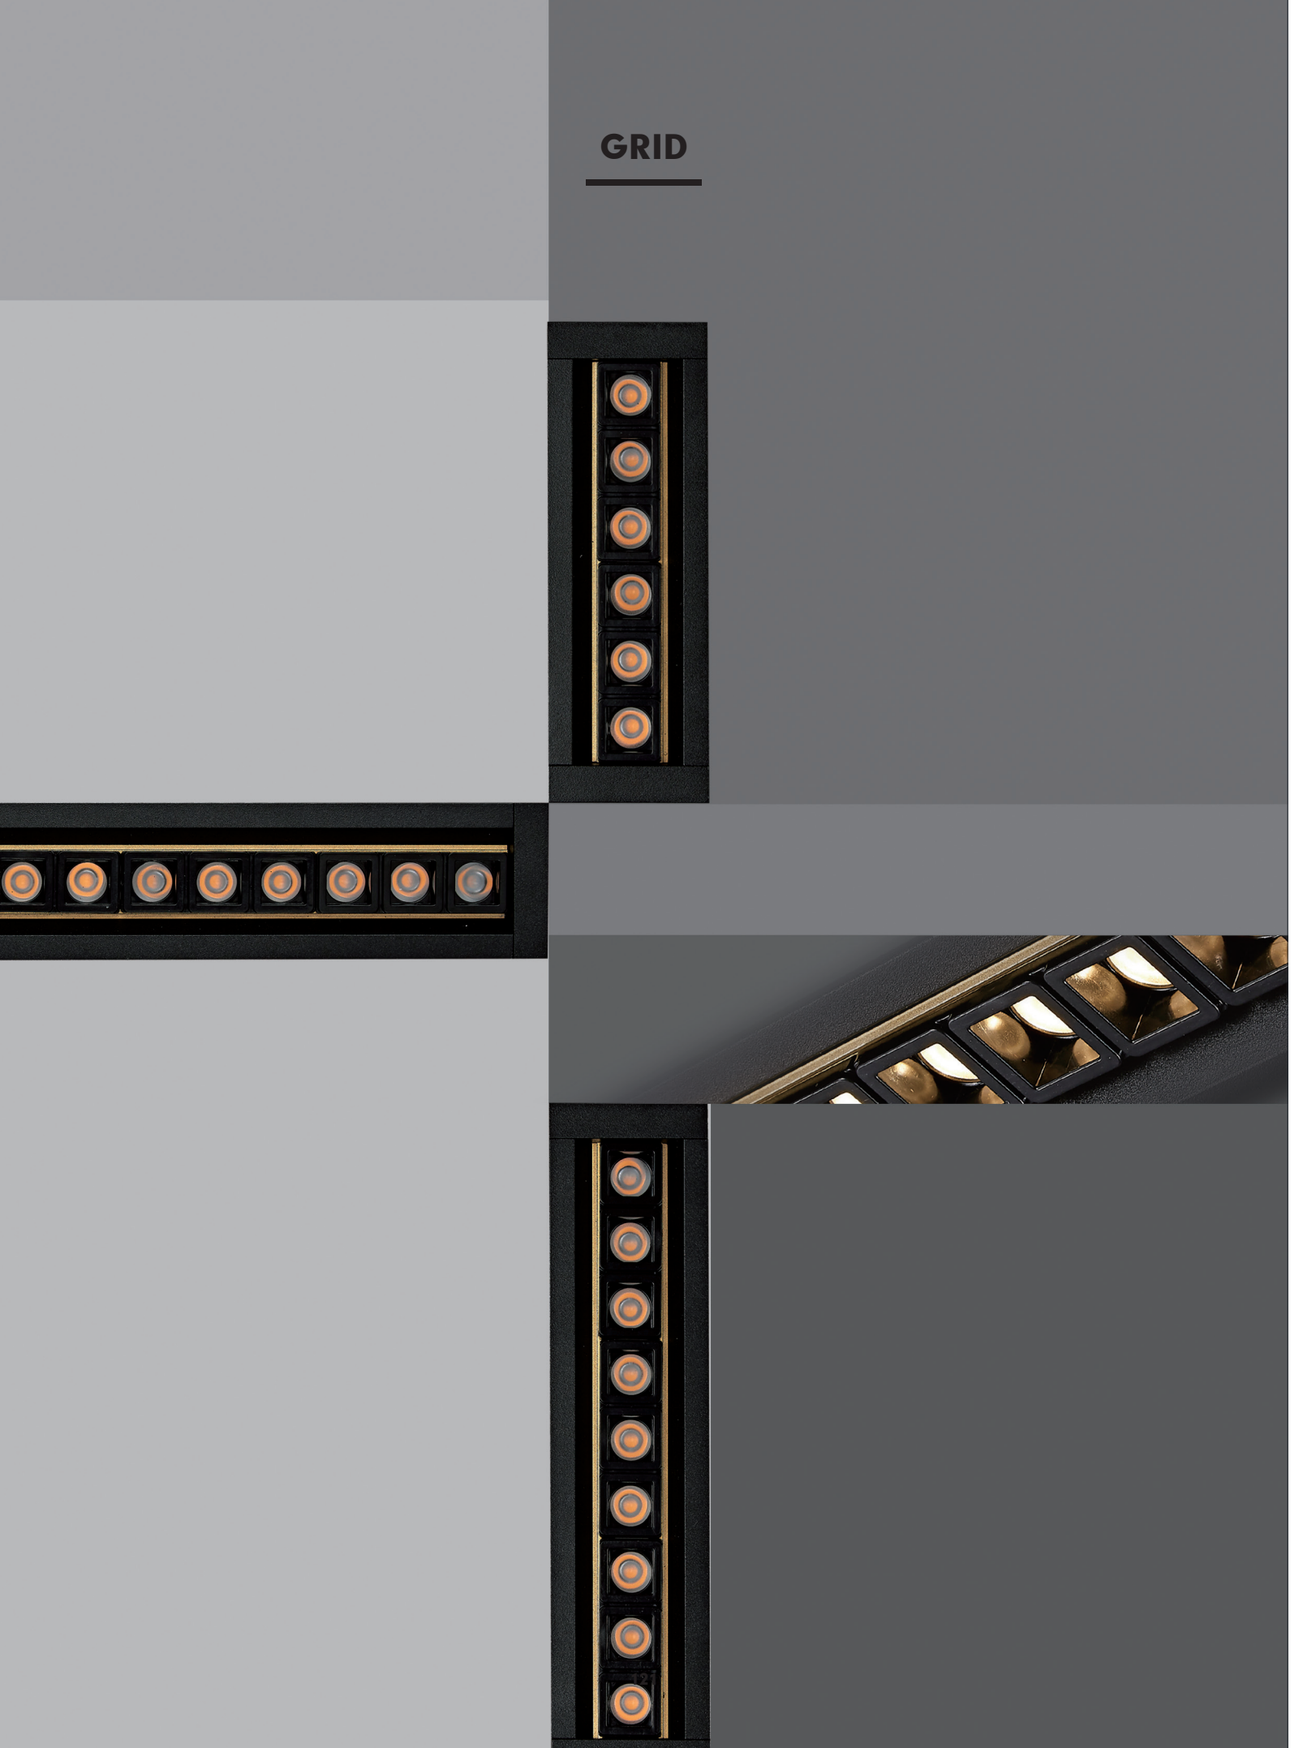

GRID









135x40



200x40



260x40

SL74165/6 x 2W

LED: OSRAM SMD
Power: 6x2W
Flux(Lm): 745Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

SL74166/9 x 2W

LED: OSRAM SMD
Power: 9x2W
Flux(Lm): 1125Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

SL74167/12 x 2W

LED: OSRAM SMD
Power: 12x2W
Flux(Lm): 1416Lm
Angle: 24°/15°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black+Gold

IP 20

CRI 90

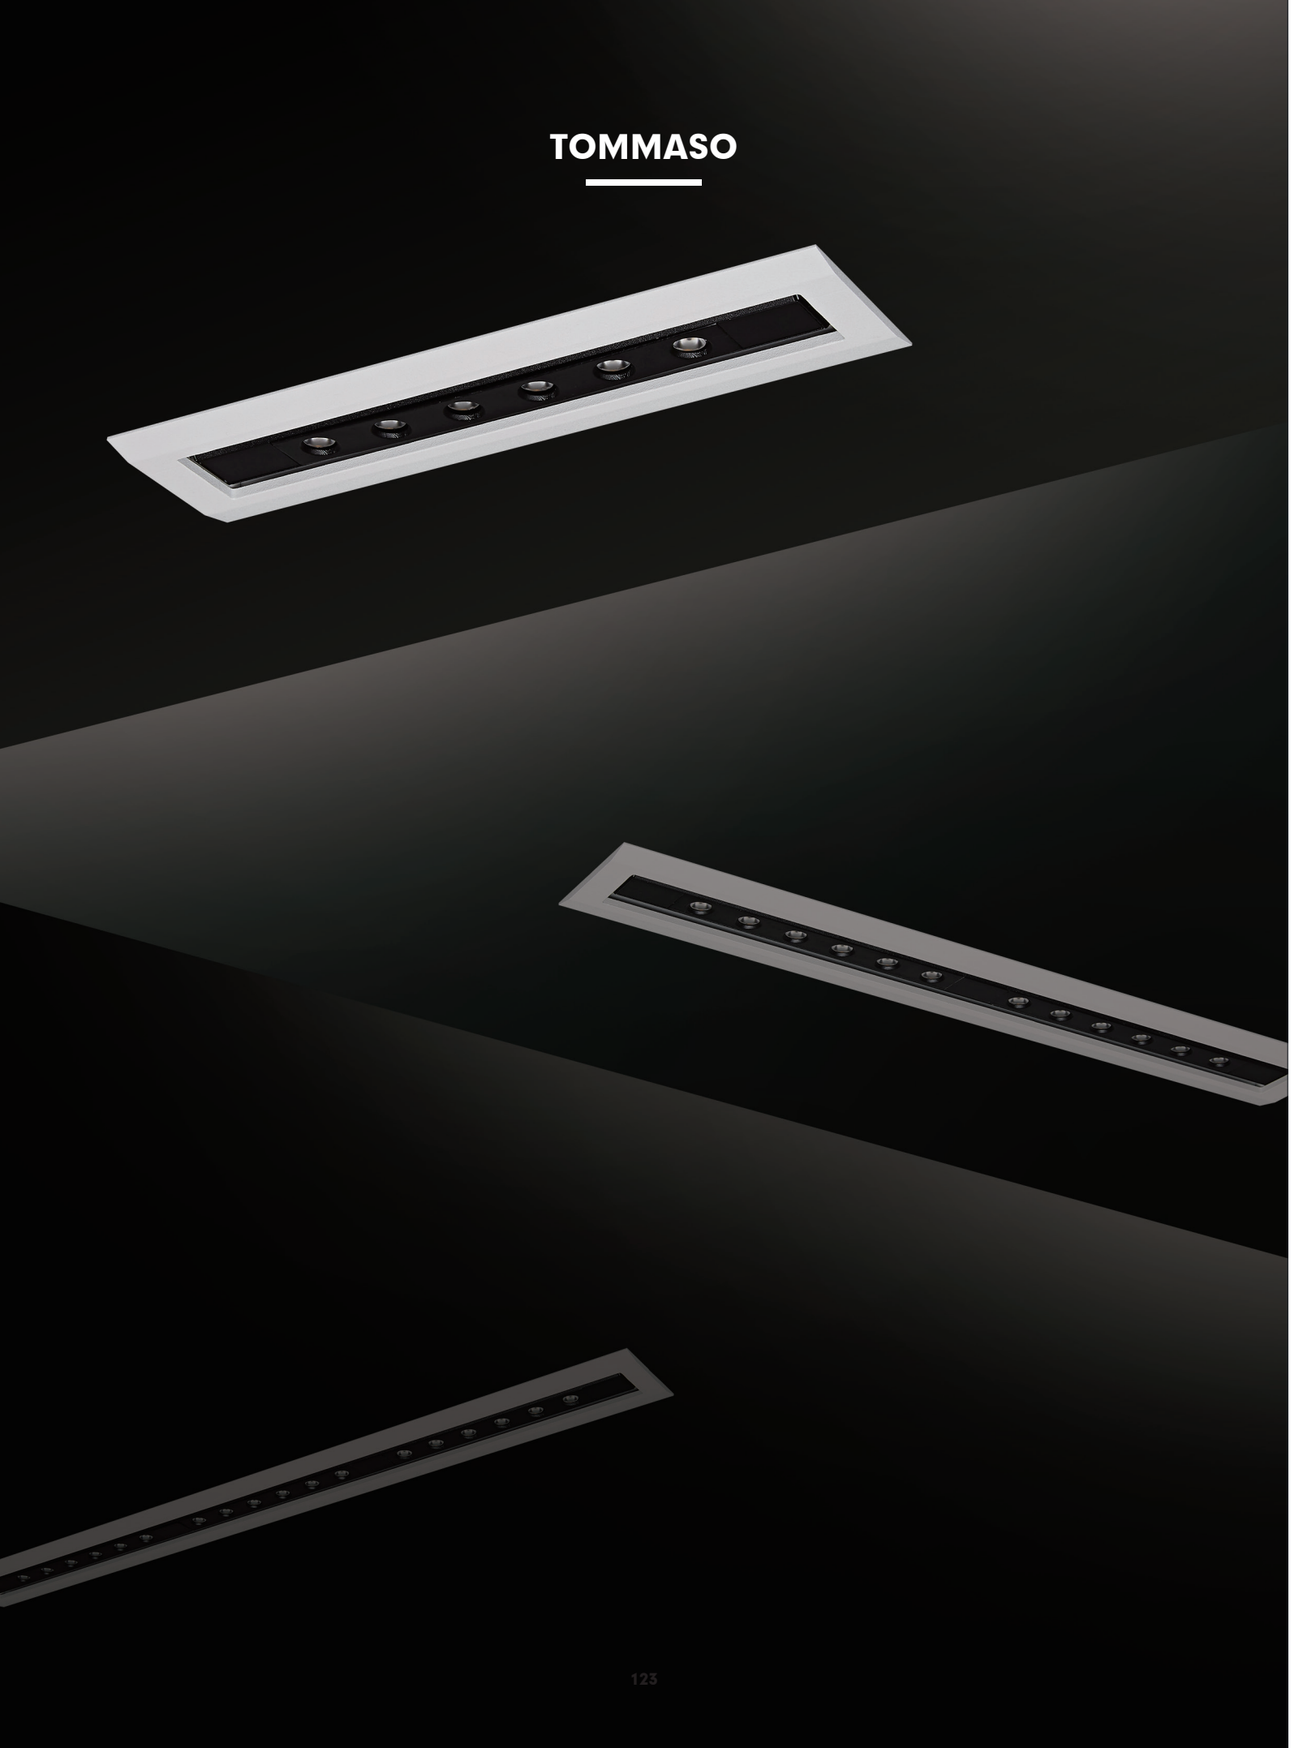

TOMMASO









172x40



313x40



453x40

SL74191/6 x 1W

LED: Bridgelux SMD
Power: 6×1W
Flux(Lm): 403Lm
Angle: 24°/36°
CTN: 20
Material: Iron+Aluminum

SL74192/12 x 1W

LED: Bridgelux SMD
Power: 12×1W
Flux(Lm): 869Lm
Angle: 24°/36°
CTN: 12
Material: Iron+Aluminum

SL74193/18 x 1W

LED: Bridgelux SMD
Power: 18×1W
Flux(Lm): 1325Lm
Angle: 24°/36°
CTN: 12
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand Black

IP	CRI
20	90

GRIYA







GRIYA







SL74320/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 156Lm
Angle: 20°/24°/50°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black
Sand White+Black

IP	CRI
20	90

GRIYA













70x35

160x35

310x35

SL74321/2 x 2.5W

LED: Latticepower SMD
Power: 2×2.5W
Flux(Lm): 297Lm
Angle: 24°/10°/18°/30°
CTN: 30
Material: Aluminum

SL74328/5 x 2.5W

LED: Latticepower SMD
Power: 5×2.5W
Flux(Lm): 623Lm
Angle: 24°/10°/18°/30°
CTN: 30
Material: Aluminum

SL74336/10 x 2.5W

LED: Latticepower SMD
Power: 10×2.5W
Flux(Lm): 1485Lm
Angle: 24°/10°/18°/30°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand Black

IP 20

CRI 90

GRIYA













70x50

160x50

315x50

SL74322/2 x 2.5W

LED: Latticepower SMD
Power: 2×2.5W
Flux(Lm): 297Lm
Angle: 24°/10°/18°/30°
CTN: 20
Material: Aluminum

SL74329/5 x 2.5W

LED: Latticepower SMD
Power: 5×2.5W
Flux(Lm): 623Lm
Angle: 24°/10°/18°/30 °
CTN: 20
Material: Aluminum

SL74337/10 x 2.5W

LED: Latticepower SMD
Power: 10×2.5W
Flux(Lm): 1485Lm
Angle: 24°/10°/18°/30°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand Black

IP 20

CRI 90

GRIYA



SL74500/3 × 2W



LED: YS SMD
Power: 3x2W
Flux(Lm): 354Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum



Colortemperature

2700K 3000K 4000K

Color

Sand White+Black Sand Black

IP 20 CRI 90

GRIYA



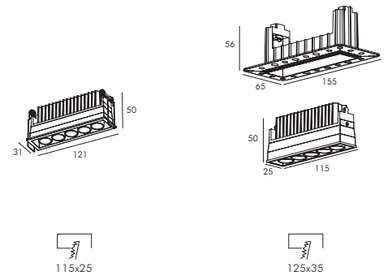

SL74501/5 × 2W

LED: YS SMD
Power: 5x2W
Flux(Lm): 551Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

SL74507/5 × 2W

LED: YS SMD
Power: 5x2W
Flux(Lm): 551Lm
Angle: 24°/30°/40°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black Sand Black

IP 20 CRI 90

GRIYA





SL74502/4 x 2W

LED: HY SMD
Power: 4x2W
Flux(Lm): 392Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum





SL74508/4 x 2W

LED: HY SMD
Power: 4x2W
Flux(Lm): 392Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum





Colortemperature

2700K 3000K 3500K 4000K

Color

Sand White+Black Sand Black

IP 20 CRI 90

GRIYA







SL74503/9 x 2W

LED: HY SMD
Power: 9x2W
Flux(Lm): 929Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 3500K 4000K

Color

Sand White+Black Sand Black

IP 20 CRI 90



GRIYA









SLC78070/5 x 2W

LED: HY SMD
Power: 5x2W
Flux(Lm): 551Lm
Angle: 24°/30°/40°
CTN: 20
Material: Aluminum

SLC78069/4 x 2W

LED: HY SMD
Power: 4x2W
Flux(Lm): 392Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black
Sand White
Sand Black

IP 20

CRI 90

GRIYA

























Ø35

40x35

105x35

190x35

SL74292/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 143Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

SL74291/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 143Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

SL74295/3 x 2W

LED: OSRAM SMD
Power: 3x2W
Flux(Lm): 413Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

SL74296/6 x 2W

LED: OSRAM SMD
Power: 6x2W
Flux(Lm): 705Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP 20

CRI 90

GRIYA

























55x55

70x55

55x55

70x55

SL74242/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 372Lm
Angle: 30°/38°
CTN: 30
Material: Aluminum

SL74243/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 372Lm
Angle: 30°/38°
CTN: 30
Material: Aluminum

SL74287/4 x 1.5W

LED: OSRAM SMD
Power: 4x1.5W
Flux(Lm): 443Lm
Angle: 35°/50°
CTN: 30
Material: Aluminum

SL74289/4 x 1.5W

LED: OSRAM SMD
Power: 4x1.5W
Flux(Lm): 443Lm
Angle: 35°/50°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP 20

CRI 90

















SLC78090/4x2.5W

LED: Latticepower SMD
Power: 4x2.5W
Flux(Lm): 607Lm
Angle: 24°/15°/36°
CTN: 30
Material: Aluminum

SLC78091/4x2.5W

LED: Latticepower SMD
Power: 4x2.5W
Flux(Lm): 262Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

SLC78089/4 x 1.5W

LED: OSRAM SMD
Power: 4x1.5W
Flux(Lm): 443Lm
Angle: 35°/50°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

SLC78090 SLC78091
Sand Black
Sand White+Black

SLC78089
Sand White+Black

IP 20

CRI 90



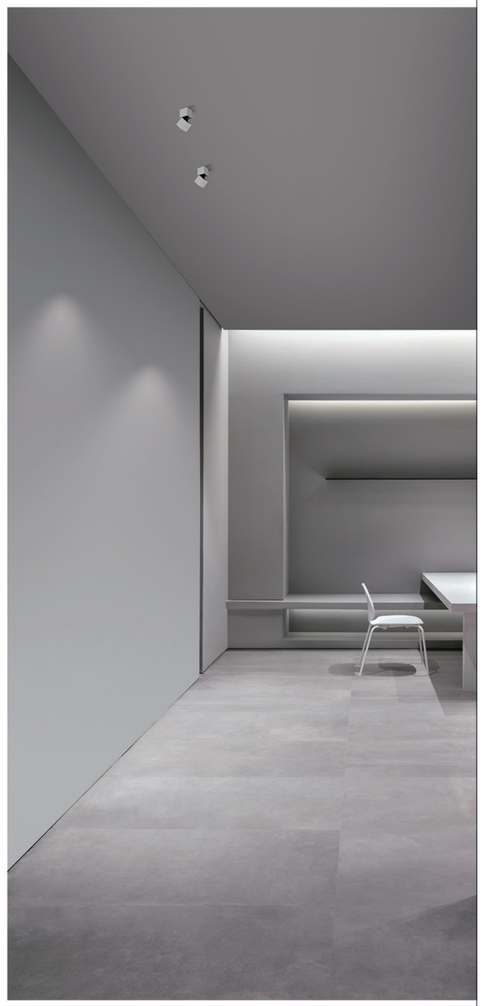





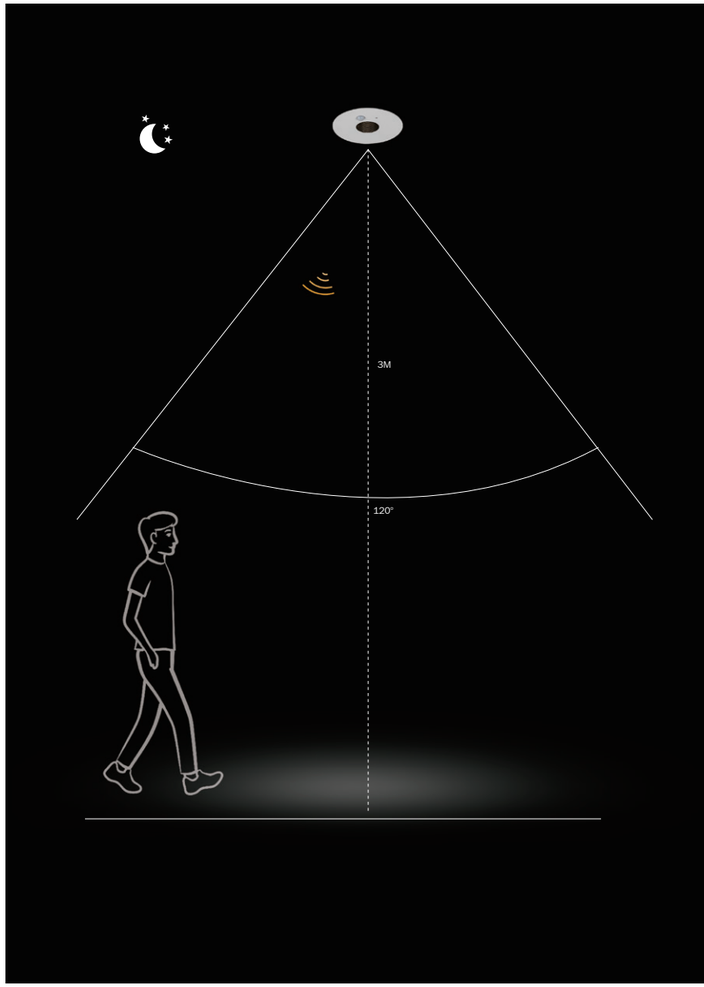

SL74229/10W

LED:LUMINUS COB
Power: 10W
Flux(Lm): 470Lm
Angle: 15°/20°/30°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black

IP	CRI
20	90

S M A L L

CUBE



CUBE









50x50



90x50



135x50

SL74168–1/1 x 5W

LED: Bridgelux SMD
Power: 1×5W
Flux(Lm): 418Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

SL74168–2/2 x 5W

LED: Bridgelux SMD
Power: 2×5W
Flux(Lm): 975Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

SL74168–3/3 x 5W

LED: Bridgelux SMD
Power: 3×5W
Flux(Lm): 1299Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand White+Black
Sand Black
Sand Black+White

IP 20

CRI 90

CUBE









65x55



100x65



140x65

SL74169–1/1 x 5W

LED: Bridgelux SMD
Power: 1×5W
Flux(Lm): 418Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

SL74169–2/2 x 5W

LED: Bridgelux SMD
Power: 2×5W
Flux(Lm): 975Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

SL74169–3/3 x 5W

LED: Bridgelux SMD
Power: 3×5W
Flux(Lm): 1299Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand White+Black
Sand Black
Sand Black+White

IP 20

CRI 90



CUBE

CUBE













SLC78019–1/1 x 5W

LED: Bridgelux SMD
Power: 1×5W
Flux(Lm): 418Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

SLC78019–2/2 x 5W

LED: Bridgelux SMD
Power: 2×5W
Flux(Lm): 975Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

SLC78019–3/3 x 5W

LED: Bridgelux SMD
Power: 3×5W
Flux(Lm): 1299Lm
Angle: 20°/35°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand White+Black
Sand Black
Sand Black+White

IP 20

CRI 90

FOCUS



FOCUS













SL74330/5W

LED: LatticePower SMD
Power: 5W
Flux(Lm): 186Lm-163Lm
Angle: 12°-35°
CTN: 30
Material: Aluminum

SL74331/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 641Lm-599Lm
Angle: 11°-55°
CTN: 30
Material: Aluminum

SL74332/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 827Lm-845Lm
Angle: 15°-46°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Matt White+Black

IP 20

CRI 90

FOCUS



FOCUS













SLC78086/5W

LED: LatticePower SMD
Power: 5W
Flux(Lm): 186Lm-163Lm
Angle: 12°-35°
CTN: 20
Material: Aluminum

SLC78087/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 641Lm-599Lm
Angle: 11°-55°
CTN: 12
Material: Aluminum

SL78088/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 827Lm-845Lm
Angle: 15°-46°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Matt White+Black

IP 20

CRI 90





In fact, art and beauty

is what all along pursuing. But to us the most important thing is that we must think human–oriented structure.

SUN













SL74149/7W

LED: Prolight SMD
Power: 7W
Flux(Lm): 418Lm
Angle: 24°+ ∠ 25°/30°+ ∠ 25°
CTN: 30
Material: Aluminum

SL74150/7W

LED: Prolight SMD
Power: 7W
Flux(Lm): 418Lm
Angle: 24°+ ∠ 25°/30°+ ∠ 25°
CTN: 30
Material: Aluminum

SLC78052/7W

LED: Prolight SMD
Power: 7W
Flux(Lm): 418Lm
Angle: 24°+ ∠ 25°/30°+ ∠ 25°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand Black
Sand White+Black

IP 20

CRI 90

SUN













SL74230/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 410Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

SL74231/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 410Lm
Angle: 24°/30°/40°
CTN: 20
Material: Aluminum

SLC78054/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 410Lm
Angle: 24°/30°/40°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand Black+White

IP 20

CRI 90

SUN









SUN



SUN













DL73076/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 501Lm
Angle: 110°
CTN: 30
Material: Aluminum

DL73077/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 501Lm
Angle: 110°
CTN: 20
Material: Aluminum

DLC79026/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 501Lm
Angle: 110°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color (DDL73076/77)

Sand White

Color (DLC79026)

Sand White
Sand Black+White

IP 20

CRI 90

SUN









DL73074/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 210Lm
Angle: 100°
CTN: 30
Material: Aluminum

DL73075/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 210Lm
Angle: 100°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 20

CRI 90

DIX

DIX













SL74222/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 368Lm
Angle: 24°/20°/30°
CTN: 30
Material: Aluminum

SL74223/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 368Lm
Angle: 24°/20°/30°
CTN:20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color (SL74222/7W)

Sand White+Black
Sand White+Black/Gold

Color (SL74223/7W)

Sand White+Black
Sand Black+Gold

IP 20

CRI 90



DIX









SLC78049–1/1x7W

LED: Bridgelux COB
Power: 1x7W
Flux(Lm): 368Lm
Angle: 24°/20°/30°
CTN: 12
Material: Iron+Aluminum

SLC78049–2/2x7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 865Lm
Angle: 24°/20°/30°
CTN:8
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand White+Black/Gold

IP 20

CRI 90

SIRMI





SIRMI



SIRMI

















SL74246/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/20°/35°
CTN: 30
Material: Aluminum

SL74247/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/20°/35°
CTN: 30
Material: Aluminum

SLC78056/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/20°/35°
CTN: 30
Material: Aluminum

SLC78057/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/20°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black
Gold+Black

IP 20

CRI 90

SIRMI









SLC78058–1/1x7W

LED: Bridgelux COB
Power: 1x7W
Flux(Lm): 428Lm
Angle: 24°/20°/35°
CTN: 20
Material: Iron+Aluminum

SLC78058–2/2x7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 940Lm
Angle: 24°/20°/35°
CTN: 12
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand White+Black
Black+Gold

IP 20

CRI 90



MERLANO

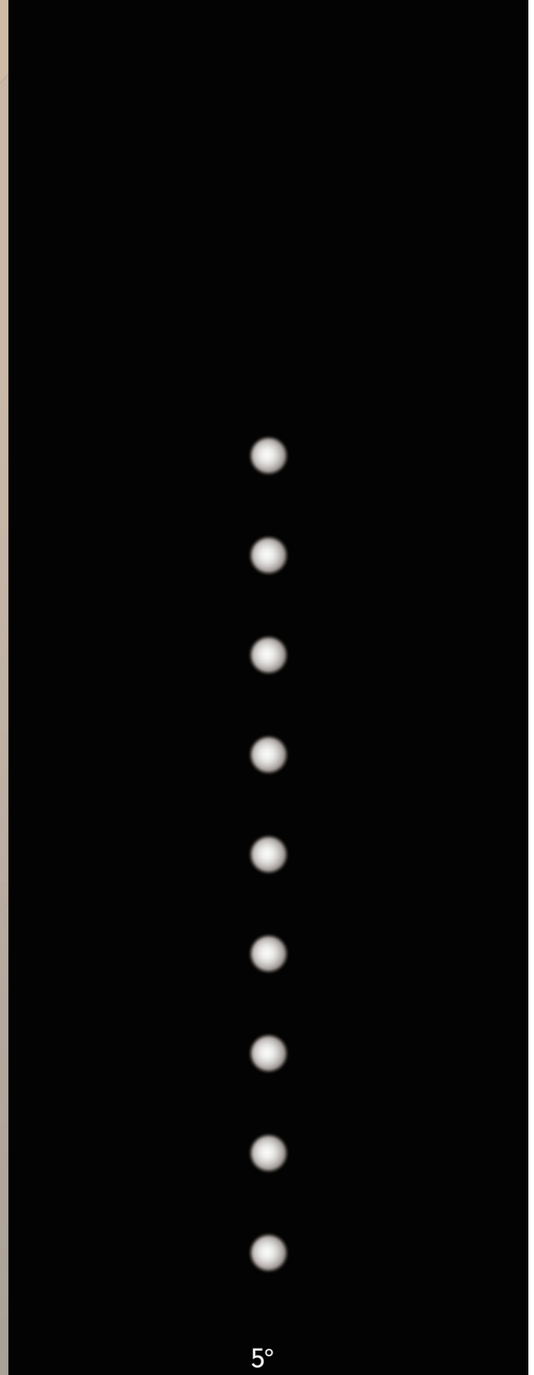

MERLANO





SL74194/5W

LED: OSRAM SMD
Power: 5W
Flux(Lm): 143Lm
Angle: 5°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black
Sand White+Black

IP 20

CRI 90

MERLANO



MERLANO













SL74196/5W

LED: OSRAM SMD
Power: 5W
Flux(Lm): 143Lm
Angle: 5°
CTN: 30
Material: Aluminum

SLC78084/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 139Lm
Angle: 5°
CTN: 30
Material: Aluminum

SLC78085/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 139Lm
Angle: 5°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Gold+Black

IP 20

CRI 90



MERLANO









WLB151/1 x 3W

LED: OSRAM SMD
Power: 1x3W
Angle: 5°
CTN: 30
Material: Aluminum

WLB152/2 x 3W

LED: OSRAM SMD
Power: 2x3W
Angle: 5°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Gold+Black

IP	CRI
20	90

Light and space

The art of light and space, feeling heaven with light and shadow.

MARCO













SL74129/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 501Lm
Angle: 30°/40°
CTN: 30
Material: Aluminum

SLC74129–1/1 x 7W

LED: Bridgelux COB
Power: 1×7W
Flux(Lm): 501Lm
Angle: 30°/40°
CTN: 20
Material: Iron+Aluminum

SLC74129–2/2 x 7W

LED: Bridgelux COB
Power: 2×7W
Flux(Lm): 1004Lm
Angle: 30°/40°
CTN: 12
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Gold

IP 20

CRI 90

MARCO

















SL74131/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 505Lm
Angle: 30°/40°
CTN: 30
Material: Aluminum

SLC74131–1/1 x 7W

LED: Bridgelux COB
Power: 1×7W
Flux(Lm): 505Lm
Angle: 30°/40°
CTN: 20
Material: Iron+Aluminum

SLC74131–2/2 x 7W

LED: Bridgelux COB
Power: 2×7W
Flux(Lm): 1008Lm
Angle: 30°/40°
CTN: 12
Material: Iron+Aluminum

SLC74131–3/3 x 7W

LED: Bridgelux COB
Power: 3×7W
Flux(Lm): 1580Lm
Angle: 30°/40°
CTN: 12
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black+Gold

IP 20

CRI 90

WATER





SL74372/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 453Lm
Angle: 30°
CTN: 30
Material: Aluminum

SL74396/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 696Lm
Angle: 30°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP 20

CRI 90

WATER





SLC78107/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 478Lm
Angle: 24°
CTN: 30
Material: Aluminum

SLC78109/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 691Lm
Angle: 20°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black+Gun Grey

IP 20

CRI 90

WATER



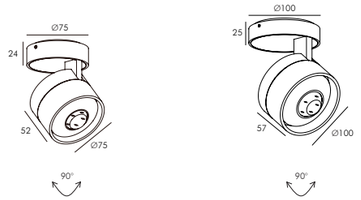

SLC78108/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 478Lm
Angle: 24°
CTN: 30
Material: Aluminum

SLC78110/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 691Lm
Angle: 20°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black+Gun Grey

IP 20

CRI 90



WATER



IP44

WATER









SL74190/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 221Lm
Angle: 24°/30°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand white
Sand black

IP 42

CRI 90

WATER















SL74091–2.5/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 382Lm
Angle: 24°
CTN: 30
Material: Aluminum

SL74091–3/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 690Lm
Angle: 24°
CTN: 30
Material: Aluminum

SL74091–4/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 905Lm
Angle: 20°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand white
Sand black

IP 44

CRI 90

WATER









SL74301/8W

LED: Bridgelux COB
Power: 8W
Flux(Lm): 296Lm
Angle: 80°
CTN: 20
Material: Aluminum

SLC78050/8W

LED: Bridgelux COB
Power: 8W
Flux(Lm): 296Lm
Angle: 80°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 3500K 4000K

Color

Rose Gold
Shiny Chrome

IP	CRI
20	90

WATER













HL7771/8W

LED: Bridgelux COB
Power: 8W
Flux(Lm): 296Lm
Angle: 80°
CTN: 12
Material: Aluminum

WLB139–1/1x5W

LED: Bridgelux COB
Power: 1x5W
Angle: 80°
CTN: 20
Material: Aluminum

WLB139–2/2x2.5W

LED: Bridgelux COB
Power: 2x2.5W
Angle: 80°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 3500K 4000K

Color

Rose Gold+Black
Shiny Chrome+Black

IP	CRI
20	90

GUNTER

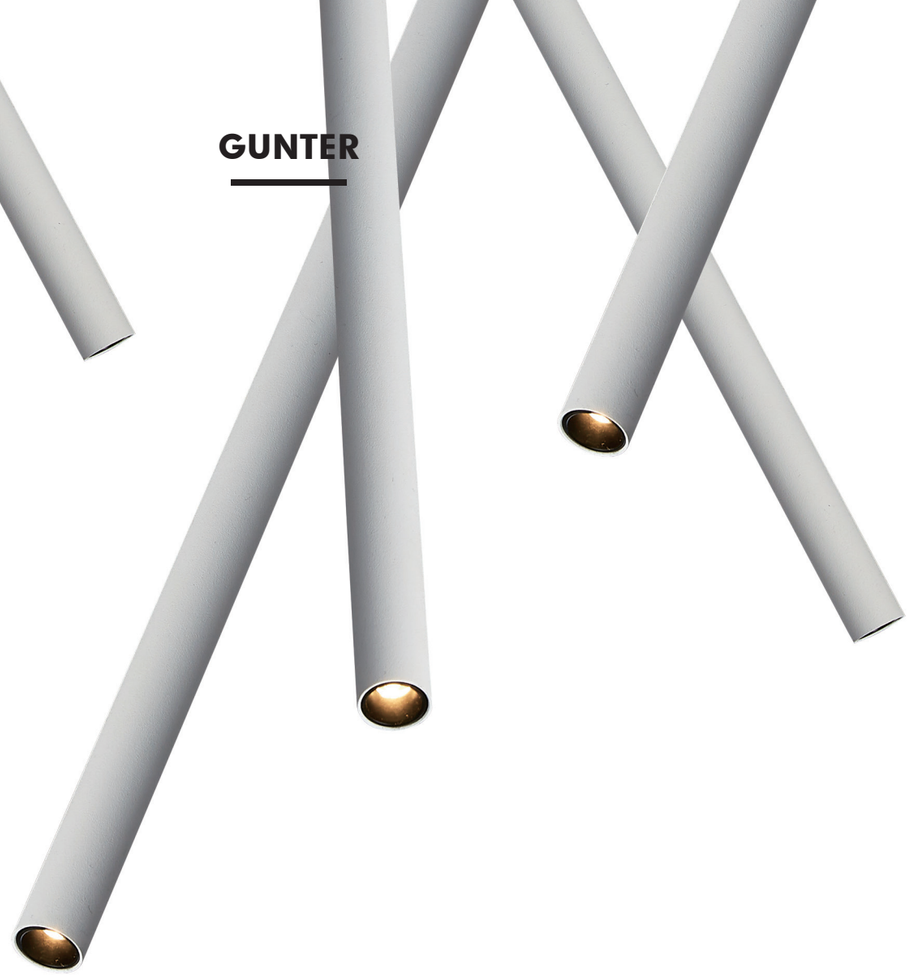

GUNTER



GUNTER

GUNTER



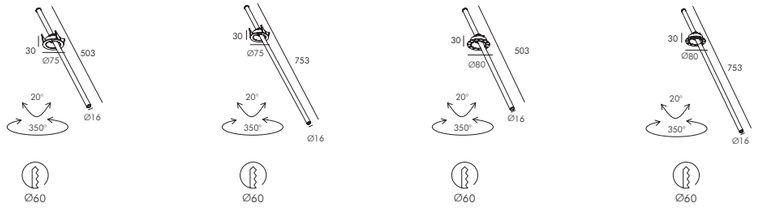

SL74197/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

SL74198/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

SL74199/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

SL74200/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP 20

CRI 90

GUNTER

GUNTER





HL7766/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

HL7767/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP	CRI
20	90

LED WALL
WASHER
LIGHT
SERIES

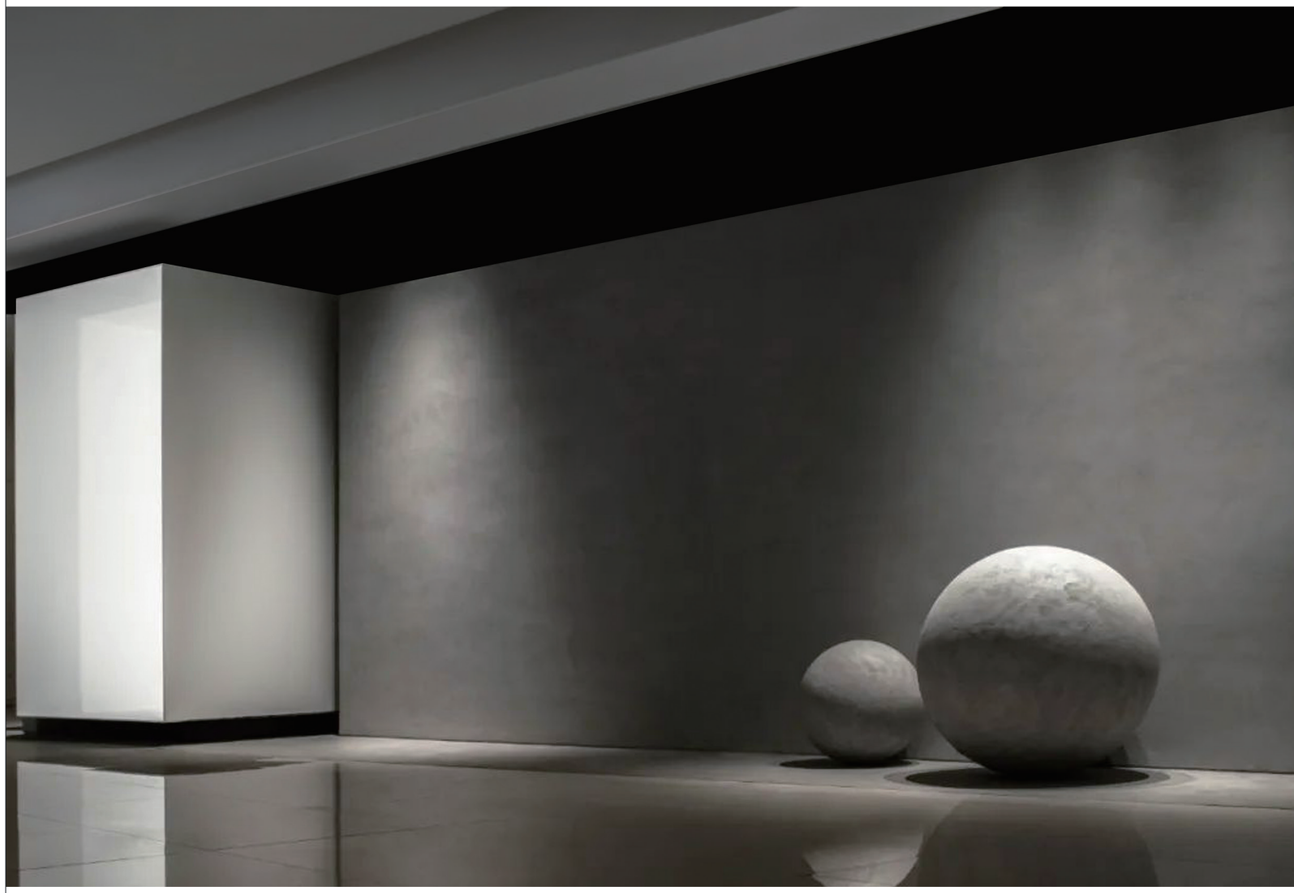

LODI







LODI













FL76090/7W

LED: LK COB
Power: 7W
Flux(Lm): 321Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum

FL76091/7W

LED: LK COB
Power: 7W
Flux(Lm): 321Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum

FL76092/10W

LED: LK COB
Power: 10W
Flux(Lm): 567Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum

FL76093/10W

LED: LK COB
Power: 10W
Flux(Lm): 567Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum

Colortemperature

2700K 4000K 6500K

Color

Sand White+Black

IP 20

CRI 90

SARDIN

WATERTIGHTNESS



SARDIN

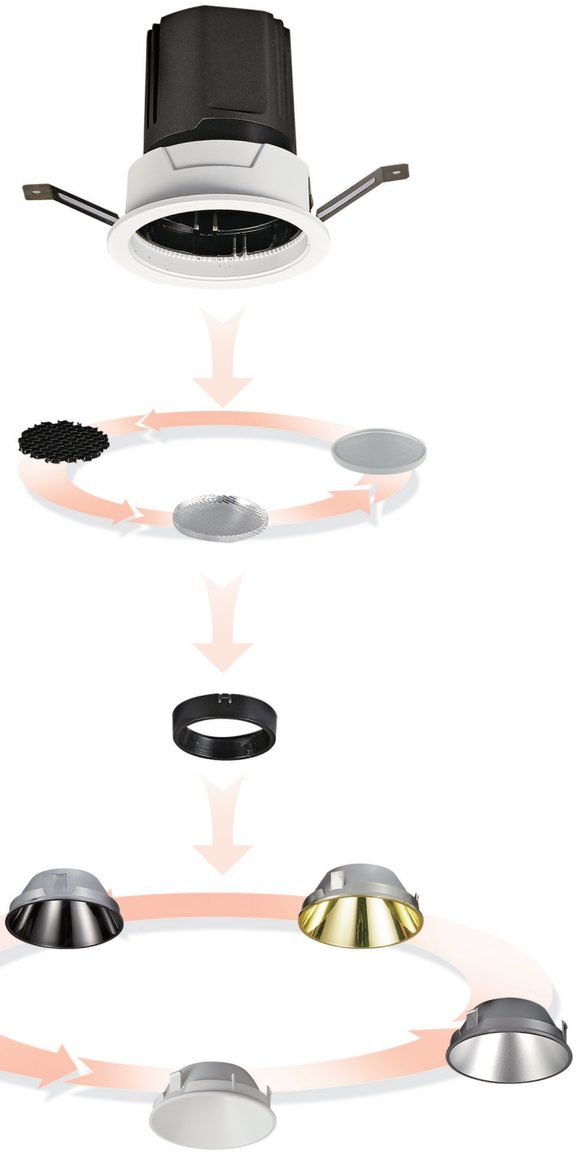

SARDIN

SARDIN









FL76039/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 408Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76039/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 785Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76040/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 402Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76040/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 760Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

Colortemperature

2700K 3000K 4000K 5000K

2700K 3000K 4000K

2700K 3000K 4000K 5000K

2700K 3000K 4000K

IP 54

CRI 97

Color

Sand White+White
Sand White+Black
Sand White+Silver

SARDIN













FL76040B/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 480Lm
Angle: 24°/15°/35° ∠ 10°
CTN: 30
Material: Aluminum+PC

FL76041/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 264Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76041/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 460Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76042/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 283Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76042/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 530Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

Colortemperature

2700K 3000K 4000K

2700K 3000K 4000K 5000K

2700K 3000K 4000K

2700K 3000K 4000K 5000K

2700K 3000K 4000K

Color

Sand White

IP 54

CRI 97

SARDIN

SARDIN





SARDIN

SARDIN









FL76043/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 408Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC

2700K 3000K 4000K 5000K

FL76043/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 785Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC

2700K 3000K 4000K

FL76044/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 402Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC

2700K 3000K 4000K 5000K

FL76044/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 760Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC

2700K 3000K 4000K

Color

Sand White+White
Sand White+Black
Sand White+Silver

IP 54
CRI 97

SARDIN













FL76044B/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 480Lm
Angle: 24°/15°/35° ∠ 10°
CTN: 20
Material: Aluminum+PC

2700K 3000K 4000K

FL76045/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 264Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC

2700K 3000K 4000K 5000K

FL76045/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 460Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC

2700K 3000K 4000K

FL76046/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 283Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC

2700K 3000K 4000K 5000K

FL76046/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 530Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC

2700K 3000K 4000K

Color

Sand White

IP 54
CRI 97



MILAN

MILAN









FL76025/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 282Lm
Angle: 24°/15°/35°
CTN: 50
Material: Aluminum

FL76027/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 276Lm
Angle: 24°/15°/35°
CTN: 50
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP	CRI
20	90

MILAN









FL76001/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 378Lm/857Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

FL76003/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 359Lm/835Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP 20 CRI 90

MILAN









FL76005/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 378Lm/857Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

FL76007/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 359Lm/835Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP 20 CRI 90

MILAN

















FL76015/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

FL76016/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

FL76033/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

FL76034/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP	CRI
20	90

MILAN

















FL76017/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 810Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum

FL76018/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 820Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum

FL76035/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 810Lm
Angle: 24°/15°/35°
CTN: 12
Material: Aluminum

FL76036/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 820Lm
Angle: 24°/15°/35°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP	CRI
20	90

PACO



PACO







FL76009/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 585Lm
Angle: 30°×50°
CTN: 20
Material: Aluminum

FL76019/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 825Lm
Angle: 30°×50°
CTN: 12
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP	CRI
20	90

AUGE













FL76086/7W

LED: GYM COB
Power: 7W
Flux(Lm): 388Lm
Angle: 18°/24°/30°
CTN: 50
Material: Aluminum

FL76087/7W

LED: GYM COB
Power: 7W
Flux(Lm): 388Lm
Angle: 18°/24°/30°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP	CRI
20	97

AUGE













FL76088/12W

LED: GYM COB
Power: 12W
Flux(Lm): 663Lm
Angle: 24°/36°
CTN: 50
Material: Aluminum

FL76089/12W

LED: GYM COB
Power: 12W
Flux(Lm): 663Lm
Angle: 24°/36°
CTN: 50
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP	CRI
20	97

VERONA









FL76100/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 375Lm
Angle: 15°/24°/36°
CTN: 50
Material: Aluminum

FL76101/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 375Lm
Angle: 15°/24°/36°
CTN: 50
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand White+White
Sand White+Silver

IP 20
CRI 95

VERONA









FL76102/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 742Lm
Angle: 15°/24°/36°
CTN: 50
Material: Aluminum

FL76103/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 742Lm
Angle: 15°/24°/36°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand White+White
Sand White+Silver

IP 20
CRI 95



DRO













FL76105/7W

LED: AZT COB
Power: 7W
Flux(Lm): 363Lm
Angle: 24°/36°/50°
CTN: 50
Material: Aluminum

FL76106/7W

LED: AZT COB
Power: 7W
Flux(Lm): 363Lm
Angle: 24°/36°/50°
CTN: 50
Material: Aluminum

FL76107/10W

LED: AZT COB
Power: 10W
Flux(Lm): 625Lm
Angle: 15°/24°/36°/50°
CTN: 50
Material: Aluminum

FL76108/10W

LED: AZT COB
Power: 10W
Flux(Lm): 625Lm
Angle: 15°/24°/36°/50°
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 3500K 4000K 5000K

Color

Sand white+Black
Sand white+White
Sand white+Black Chrome
Sand white+white Chrome

IP 20 CRI 95



ORLANDO



















FL76029/7W

LED: HONGLI COB
Power: 7W
Flux(Lm): 364Lm
Angle: 15°/24°/36°
CTN: 50
Material: Aluminum





FL76030/7W

LED: HONGLI COB
Power: 7W
Flux(Lm): 364Lm
Angle: 15°/24°/36°
CTN: 50
Material: Aluminum





Colortemperature

3000K 3500K 4000K 6000K

Color

Sand whit+Gun Black
Sand whit+Matte white
Sand whit+Matte black

IP	CRI
20	90

FL76058/10W

LED: HONGLI COB
Power: 10W
Flux(Lm): 687Lm
Angle: 15°/24°/36°
CTN: 50
Material: Aluminum

FL76059/10W

LED: HONGLI COB
Power: 10W
Flux(Lm): 687Lm
Angle: 15°/24°/36°
CTN: 50
Material: Aluminum

FL76060/20W

LED: HONGLI COB
Power: 20W
Flux(Lm): 1370Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum



Colortemperature

3000K 3500K 4000K 6000K

Color

Sand whit+Gun Black
Sand whit+Matte white
Sand whit+Matte black

IP	CRI
20	90

LED
SURFACE-MOUNTED
SPOTLIGHT
SERIES





LECCO

LECCO









SLC78135/6W

LED: DOB
Power: 6W
Flux(Lm): 372Lm
Angle: 20°/30°/45°
CTN: 30
Material: Aluminum+PC

SLC78136/12W

LED: DOB
Power: 12W
Flux(Lm): 700Lm
Angle: 20°/45°
CTN: 20
Material: Aluminum+PC

SLC78137/20W

LED: DOB
Power: 20W
Flux(Lm): 1330Lm
Angle: 24°/45°
CTN: 12
Material: Aluminum+PC

Colortemperature

3000K 4000K

Color

Sand White+Transparent
Sand White+Silvery
Sand Black+Gold

IP	CRI	AC
20	90	220V



LECCO





SLC78029/8W

LED: Lumens COB AC
Power: 8W
Flux(Lm): 430Lm
Angle: 45°
CTN: 30
Material: Aluminum

SLC78030/15W

LED: Lumens COB AC
Power: 15W
Flux(Lm): 865Lm
Angle: 35°
CTN: 30
Material: Aluminum

SLC78042/20W

LED: Lumens COB AC
Power: 20W
Flux(Lm): 1198Lm
Angle: 45°
CTN: 20
Material: Aluminum

SLC78013/30W

LED: Lumens COB AC
Power: 30W
Flux(Lm): 2281Lm
Angle: 50°
CTN: 20
Material: Aluminum

Colortemperature

3000K

Color

Sand White+Black
Sand Black+White

Color

Sand green grey + White
Sand Black+White

IP	CRI	DIM
54	90	TRIAC

LECCO



LECCO







SLC78059/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 527Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

SLC78067/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 1037Lm
Angle: 15°/24°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Rose Gold
Shiny Chrome

IP 20
CRI 90



LECCO







SLC78060/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 402Lm
Angle: 24°
CTN: 20
Material: Aluminum

SLC78068/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 909Lm
Angle: 24°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Rose Gold
Shiny Chrome

IP 20

CRI 90

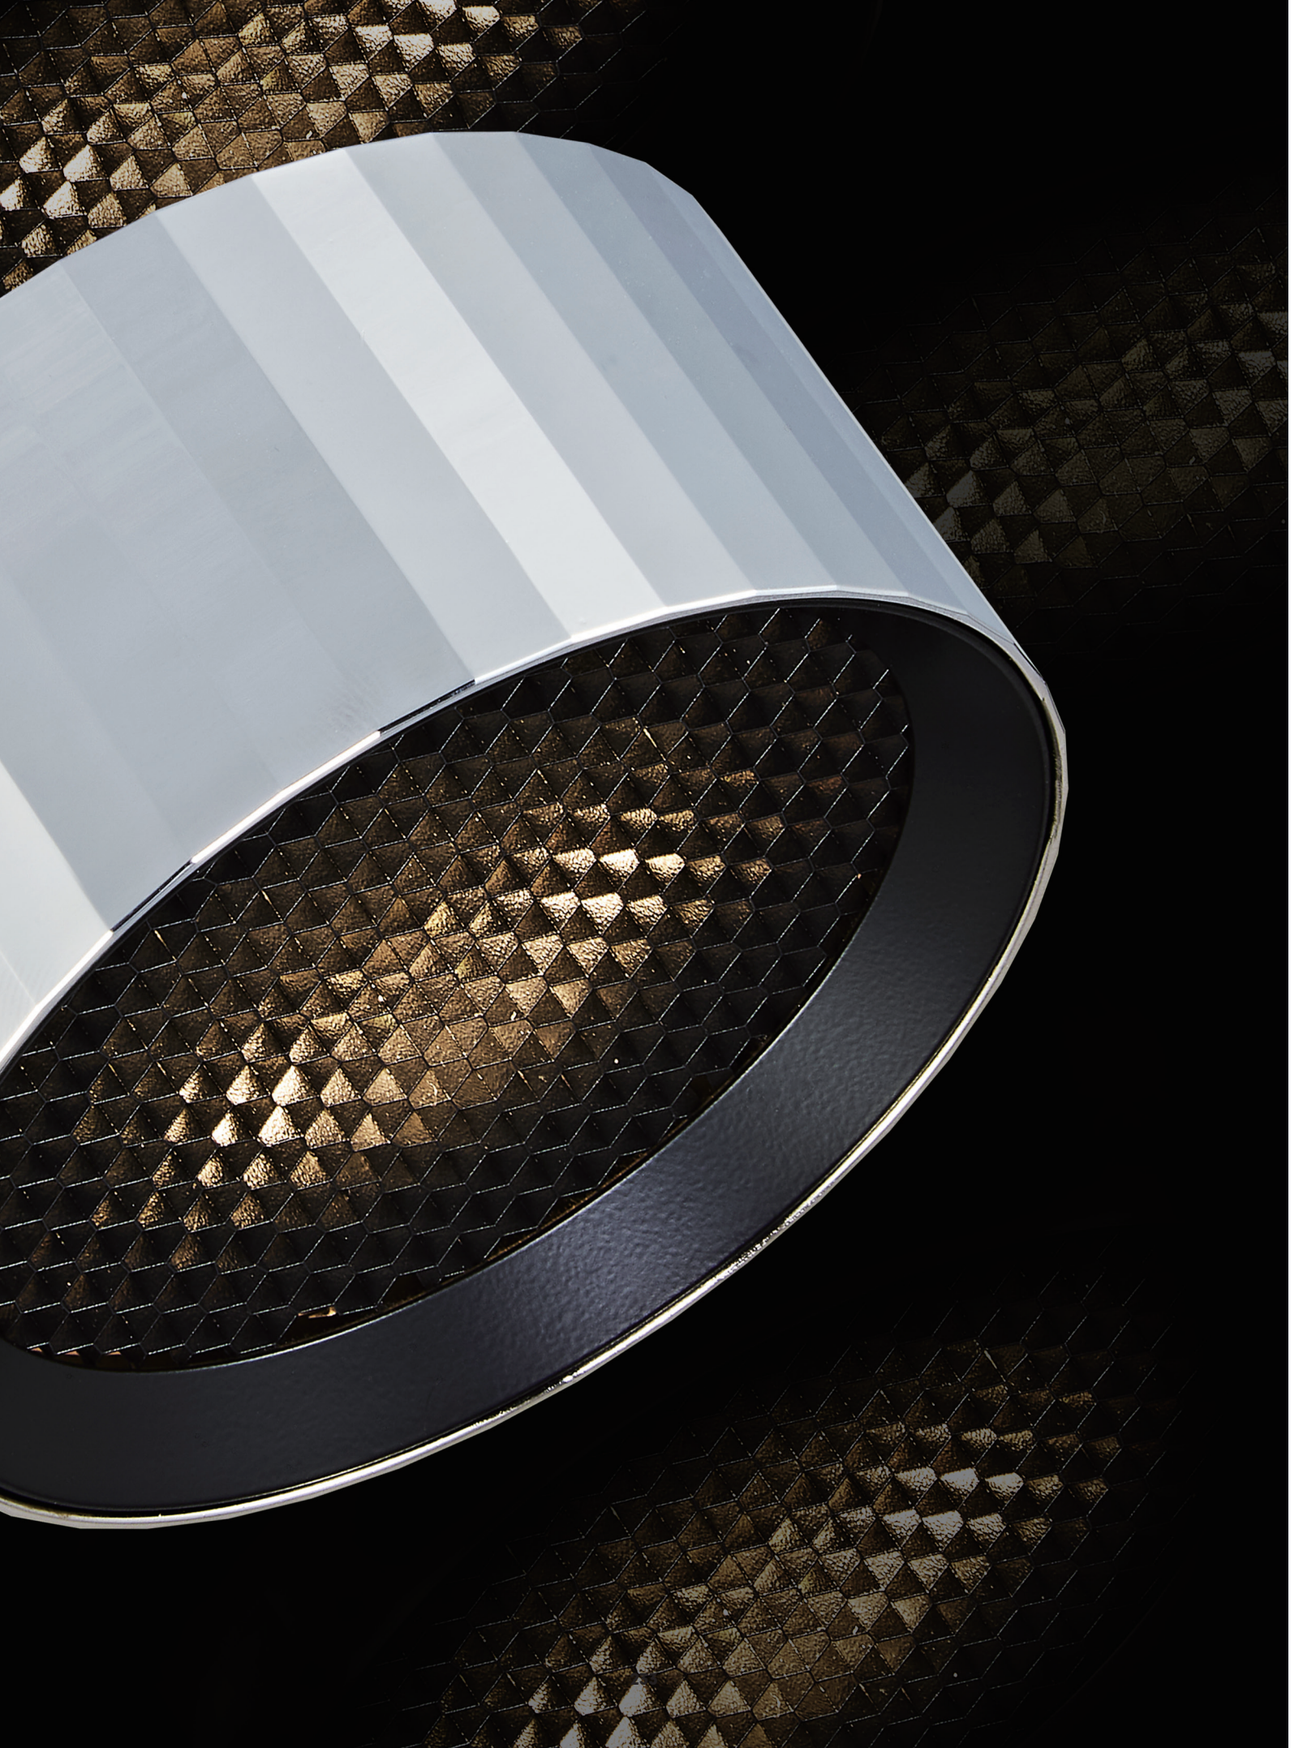

LECCO





SLC78077/5W

LED: LTWG COB
Power: 5W
Flux(Lm): 358Lm
Angle: 24°
Optional: Honeycomb
CTN: 30
Material: Aluminum

SLC78078/8W

LED: LTWG COB
Power: 8W
Flux(Lm): 517Lm
Angle: 24°
Optional: Honeycomb
CTN: 30
Material: Aluminum

SLC78079/15W

LED: LTWG COB
Power: 15W
Flux(Lm): 998Lm
Angle: 24°
Optional: Honeycomb
CTN: 20
Material: Aluminum

Colortemperature

3000K 4000K

Color

Rose Gold
Shiny Chrome
Pearl black

IP 20

CRI 90

LECCO





SLC78102/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 312Lm
Angle: 10°/20°/30°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Brown Sand texture

IP	CRI
20	90

LECCO







WLB140/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): /Lm
Angle: 20°
CTN: 12
Material: Aluminum

WLB199/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): /Lm
Angle: 20°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Brown Sand texture

IP	CRI
20	90


DETAILS



PARMA









SLC78075–1/1 x 10W

LED: Bridgelux COB
Power: 1×10W
Flux(Lm): 789Lm
Angle: 20°/30°/40°
CTN: 12
Material: Aluminum

SLC78075–2/2 x 10W

LED: Bridgelux COB
Power: 2×10W
Flux(Lm): 1560Lm
Angle: 20°/30°/40°
CTN: 8
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand Black
Gold+Black

IP	CRI
20	90

PARMA



ENNA



ENNA









SLC78021/4W

LED: Bridgelux SMD
Power: 4W
Flux(Lm): 288Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

SLC78061/8W

LED: Bridgelux COB
Power: 8W
Flux(Lm): 576Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

SLC78041/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 1349Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black
Coffee

IP 20
CRI 90

MODENA

MODENA



SLC78024/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 435Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

SLC78001/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1300Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum





Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand White+Gold

IP 20 CRI 90

BARI



BARI













SLC78004/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 790Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum

SLC78005/2 x 10W

LED: Bridgelux COB
Power: 2x10W
Flux(Lm): 1640Lm
Angle: 24°/15°/35°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 20

CRI 90



NICOLA













SLC78048–1/1 x 5W

LED: Bridgelux SMD
Power: 1×5W
Flux(Lm): 310Lm
Angle: 65°x26° ∠ 18°
CTN: 30
Material: Aluminum

SLC78048–2/2 x 5W

LED: Bridgelux SMD
Power: 2×5W
Flux(Lm): 686Lm
Angle: 65°x26° ∠ 18°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand Black+White

IP	CRI
20	90

LUCCA



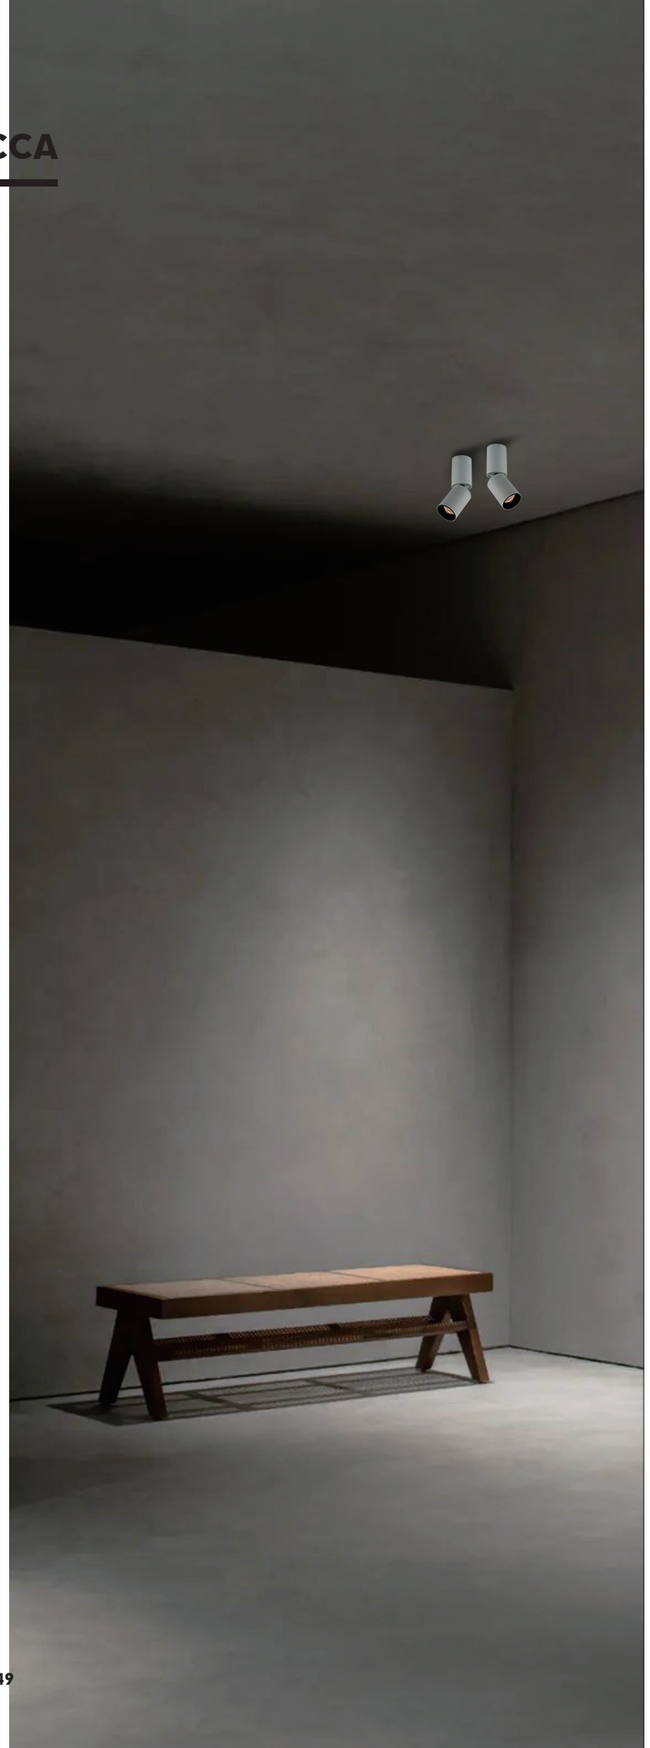

LUCCA











SLC78018/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 330Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

SLC78009/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP 20

CRI 90

ASTI

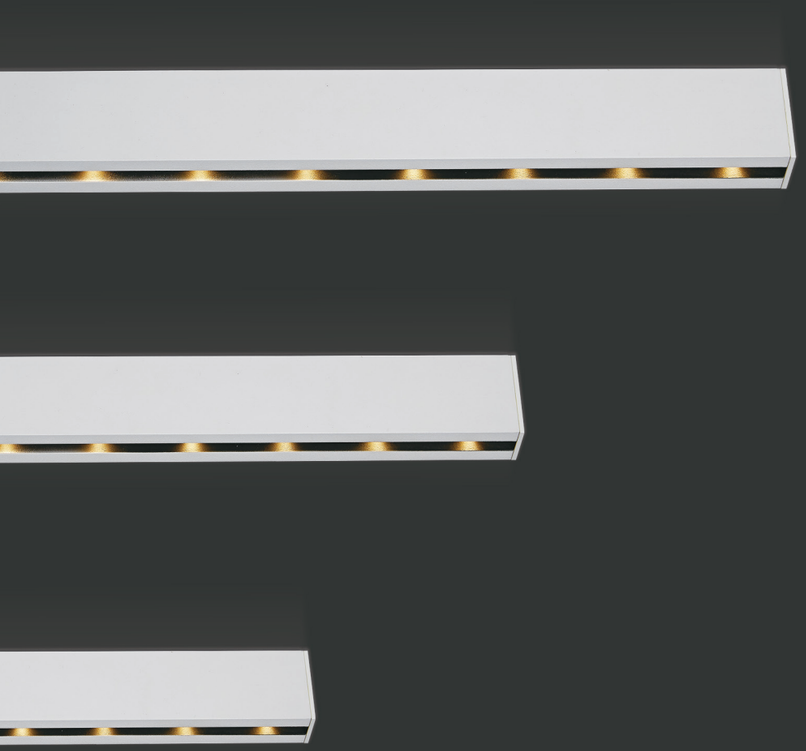

ASTI









SLC78074–4/4 × 2W

LED: HY SMD
Power: 4×2W
Flux(Lm): 400Lm
Angle: 24°/36°
CTN: 30
Material: Iron+Aluminum

SLC78074–8/8 × 2W

LED: HY SMD
Power: 8×2W
Flux(Lm): 730Lm
Angle: 24°/36°
CTN: 20
Material: Iron+Aluminum

SLC78074–12/12 × 2W

LED: HY SMD
Power: 12×2W
Flux(Lm): 1035Lm
Angle: 24°/36°
CTN: 12
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand Black

IP 20

CRI 90

LED RECESSED DOWNLIGHT

SERIES



TORINO





TORINO













DL73020–2.5/7W

LED: Bridgelux SMD
Power: 7W
Flux(Lm): 312Lm
Angle: 100°
CTN: 50
Material: Aluminum

DL73020–3.5/10W

LED: Bridgelux SMD
Power: 10W
Flux(Lm): 638Lm
Angle: 100°
CTN: 30
Material: Aluminum

DL73020–4/15W

LED: Bridgelux SMD
Power: 15W
Flux(Lm): 761Lm
Angle: 100°
CTN: 20
Material: Aluminum

DL73020–5/20W

LED: Bridgelux SMD
Power: 20W
Flux(Lm): 1295Lm
Angle: 100°
CTN: 20
Material: Aluminum

DL73020–6/25W

LED: Bridgelux SMD
Power: 25W
Flux(Lm): 1304Lm
Angle: 100°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP 20 CRI 90

KONYA



KONYA





Ø95



Ø120



Ø195

DL73031/7W

LED: Bridgelux SMD
Power: 7W
Flux(Lm): 401Lm
Angle: 80°
CTN: 30
Material: Aluminum

DL73032/15W

LED: Bridgelux SMD
Power: 15W
Flux(Lm): 940Lm
Angle: 80°
CTN: 30
Material: Aluminum

DL73033/20W

LED: Bridgelux SMD
Power: 20W
Flux(Lm): 1367Lm
Angle: 80°
CTN: 18
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 44

CRI 90



MIND EXPLORE

Weare trying to find culture essence in both modern style and classical style and expressing live to home completely.












Ø75


Ø95


Ø125


Ø145

DL73027–3/7W

LED: Bridgelux SMD
Power: 7W
Flux(Lm): 330Lm
Angle: 50°
CTN: 30
Material: Aluminum

DL73027–3.5/12W

LED: Bridgelux SMD
Power: 12W
Flux(Lm): 604Lm
Angle: 60°
CTN: 30
Material: Aluminum

DL73027–5/18W

LED: Bridgelux SMD
Power: 18W
Flux(Lm): 1193Lm
Angle: 60°
CTN: 18
Material: Aluminum

DL73027–6/25W

LED: Bridgelux SMD
Power: 25W
Flux(Lm): 1552Lm
Angle: 65°
CTN: 18
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP	CRI
44	90

ASSISI



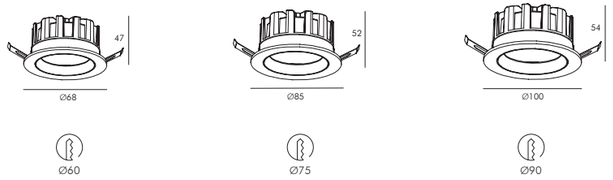

DL73026–2.5/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 173Lm
Angle: 100°
CTN: 50
Material: Aluminum

DL73026–3/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 256Lm
Angle: 90°
CTN: 30
Material: Aluminum

DL73026–3.5/7W

LED: Bridgelux SMD
Power: 7W
Flux(Lm): 462Lm
Angle: 90°
CTN: 30
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP 44 CRI 90

TURIN



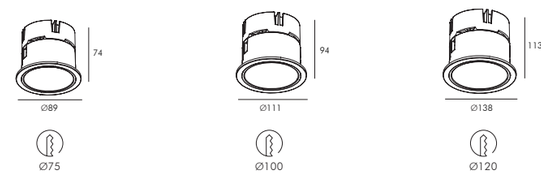

DL73054/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 375Lm
Angle: 45°
CTN: 30
Material: Aluminum

DL73060/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 740Lm
Angle: 45°
CTN: 20
Material: Aluminum

DL73066/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1180Lm
Angle: 45°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP 20 CRI 90



TURIN

TURIN













DL73086/10W

LED: Bridgelux SMD
Power: 10W
Flux(Lm): 515Lm
Angle: 85°
CTN: 30
Material: Aluminum+PC

DL73087/15W

LED: Bridgelux SMD
Power: 15W
Flux(Lm): 810Lm
Angle: 85°
CTN: 20
Material: Aluminum+PC

DL73088/10W

LED: Bridgelux SMD
Power: 10W
Flux(Lm): 566Lm
Angle: 100°
CTN: 30
Material: Aluminum+PC

DL73089/15W

LED: Bridgelux SMD
Power: 15W
Flux(Lm): 1058Lm
Angle: 110°
CTN: 20
Material: Aluminum+PC

Colortemperature

3000K 4000K 5000K

Color

Sand White

IP 20 CRI 90





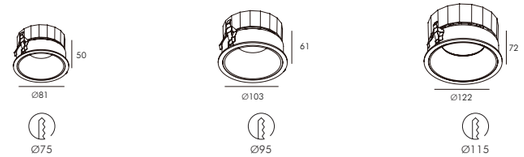

DL73085–2.5/10W

LED: GYM COB
Power: 10W
Flux(Lm): 435Lm
Angle: 60°
CTN: 30
Material: Aluminum

DL73085–3/15W

LED: GYM COB
Power: 15W
Flux(Lm): 684Lm
Angle: 60°
CTN: 30
Material: Aluminum

DL73085–4/20W

LED: GYM COB
Power: 20W
Flux(Lm): 1055Lm
Angle: 60°
CTN: 12
Material: Aluminum

Colortemperature

3000K 4000K 5000K

Color

Matte White + black
Matte White + White
Matte White + pearl black

IP 20

CRI 90

LED SURFACE-MOUNTED DOWNLIGHT

SERIES



RAVENNA



RAVENNA





DLC79030/7W

LED: Bridgelux SMD
Power: 7W
Flux(Lm): 401Lm
Angle: 80°
CTN: 30
Material: Aluminum

DLC79031/15W

LED: Bridgelux SMD
Power: 15W
Flux(Lm): 940Lm
Angle: 80°
CTN: 18
Material: Aluminum

DLC79032/20W

LED: Bridgelux SMD
Power: 20W
Flux(Lm): 1366Lm
Angle: 80°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP	CRI
44	90

LED TRACK
LIGHT
SERIES

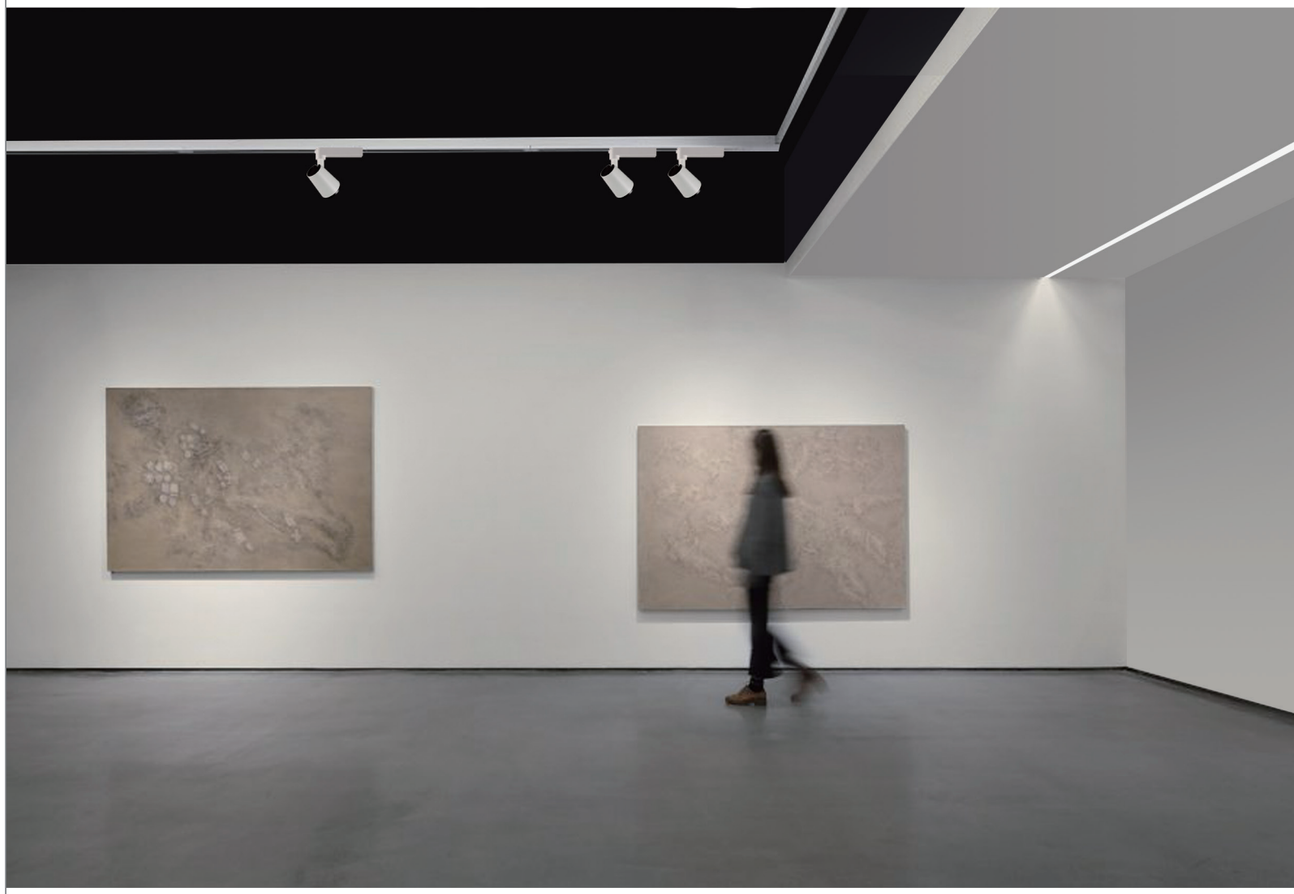

BONN



BONN



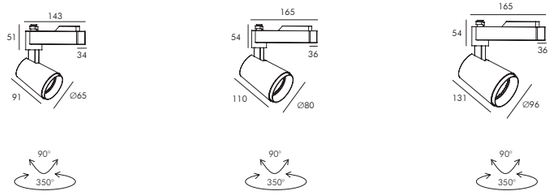

TL7593/15W

LED: GYM COB
Power: 15W
Flux(Lm): 1140Lm
Angle: 15°/24°/35°
CTN: 30
Material: Aluminum+PC

TL7594/25W

LED: GYM COB
Power: 25W
Flux(Lm): 1881Lm
Angle: 15°/24°/35°
CTN: 20
Material: Aluminum+PC

TL7595/30W

LED: GYM COB
Power: 30W
Flux(Lm): 2310Lm
Angle: 15°/24°/35°
CTN: 12
Material: Aluminum+PC

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand white+black

IP	CRI
20	90

BONN









TL75046/12W

LED: HL COB
Power: 12W
Flux(Lm): 714Lm
Angle: 24°/36°
CTN: 30
Material: Aluminum

TL75047/24W

LED: HL COB
Power: 24W
Flux(Lm): 1387Lm
Angle: 24°/36°
CTN: 30
Material: Aluminum

TL75048/36W

LED: HL COB
Power: 36W
Flux(Lm): 2034Lm
Angle: 24°/36°
CTN: 24
Material: Aluminum

Colortemperature

3000K 4000K 6000K

Color

Sand white+black
Sand Black

IP 20 CRI 90

BONN









TL75049/10W

LED: HL COB
Power: 10W
Flux(Lm): 629Lm
Angle: 15°/24°/36°
CTN: 40
Material: Aluminum

TL75050/20W

LED: HL COB
Power: 20W
Flux(Lm): 1303Lm
Angle: 15°/24°/36°
CTN: 40
Material: Aluminum

TL75051/30W

LED: HL COB
Power: 30W
Flux(Lm): 2121Lm
Angle: 15°/24°/36°
CTN: 40
Material: Aluminum

Colortemperature

3000K 4000K 6000K

Color

Sand white+black
Sand Black

IP 20 CRI 90



VARY

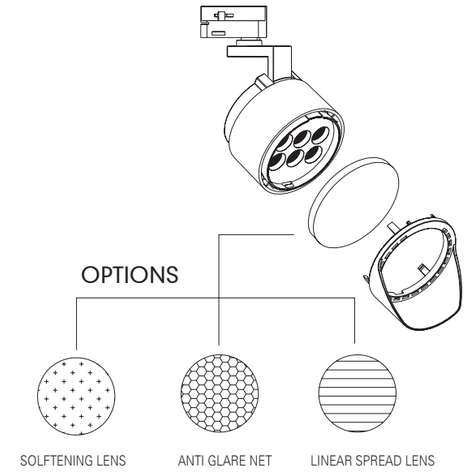





TL75002/30W

LED: LUMINUS SMD
Power: 30W
Flux(Lm): 1418Lm
Angle: 8°/24°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand white+black

IP	CRI
20	95

VARY



VARY





TL75004/30W

LED: LUMINUS SMD
Power: 30W
Flux(Lm): 1357Lm
Angle: 8°/24°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Sand white+black

IP	CRI
20	95





TL75005/28W

LED: Bridgelux COB
Power: 28W
Flux(Lm): 720Lm-1120Lm
Angle: 15°-60°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand white

IP	CRI
20	90

PIRA



PIRA















TL2019/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 570Lm
Angle: 15°/24°/35°
CTN: 20
Material: Aluminum+PC

TL2020/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 1048Lm
Angle: 15°/24°/35°
CTN: 20
Material: Aluminum+PC

TL2021/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1645Lm
Angle: 15°/24°/35°
CTN: 20
Material: Aluminum+PC

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black
Rose Gold+Black
Sand White+Black

IP 20
CRI 90

MILO





MILO





TL2022/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 443Lm
Angle: 15°/24°/35°
CTN: 20
Material: Aluminum+PC



TL2023/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 835Lm
Angle: 15°/24°/35°
CTN: 20
Material: Aluminum+PC





TL2024/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 823Lm
Angle: 15°/24°/35°
CTN: 20
Material: Aluminum+PC



TL2025/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1365Lm
Angle: 15°/24°/35°
CTN: 12
Material: Aluminum+PC



TL2026/25W

LED: Bridgelux COB
Power: 25W
Flux(Lm): 1892Lm
Angle: 15°/24°/35°
CTN: 12
Material: Aluminum+PC

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP	CRI
20	90

RICCI



Focusing 15°-60°

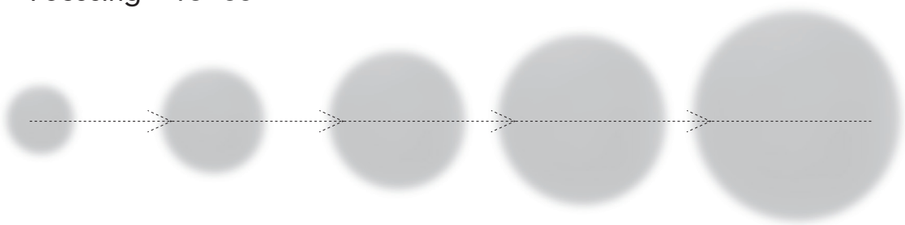

RICCI



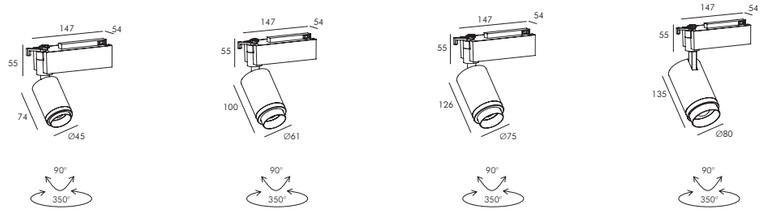

TL2027/7W

LED: CREE SMD
Power: 7W
Flux(Lm): 440-457Lm
Angle: 15°-45°
CTN: 20
Material: Aluminum+PC

TL2028/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 822-844Lm
Angle: 15°-60°
CTN: 20
Material: Aluminum+PC

TL2029/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1358-1437Lm
Angle: 15°-60°
CTN: 12
Material: Aluminum+PC

TL2030/25W

LED: Bridgelux COB
Power: 25W
Flux(Lm): 1885-2008Lm
Angle: 15°-60°
CTN: 12
Material: Aluminum+PC

Colortemperature

2700K 3000K 4000K

Color

Sand Black
Sand Black+Silver
Sand White+Black

IP	CRI
20	90



ROTATE THE FOCUS





PERIS

PERIS









TL75007/15W

LED: LUMINUS COB
Power: 15W
Flux(Lm): 458Lm
Angle: 24°-36°
CTN: 18
Material: Aluminum

TL2031/28W

LED: Bridgelux COB
Power: 28W
Flux(Lm): 1607Lm
Angle: 15°-21°
CTN: 8
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP	CRI
20	90

LED
CEILING LIGHT
SERIES

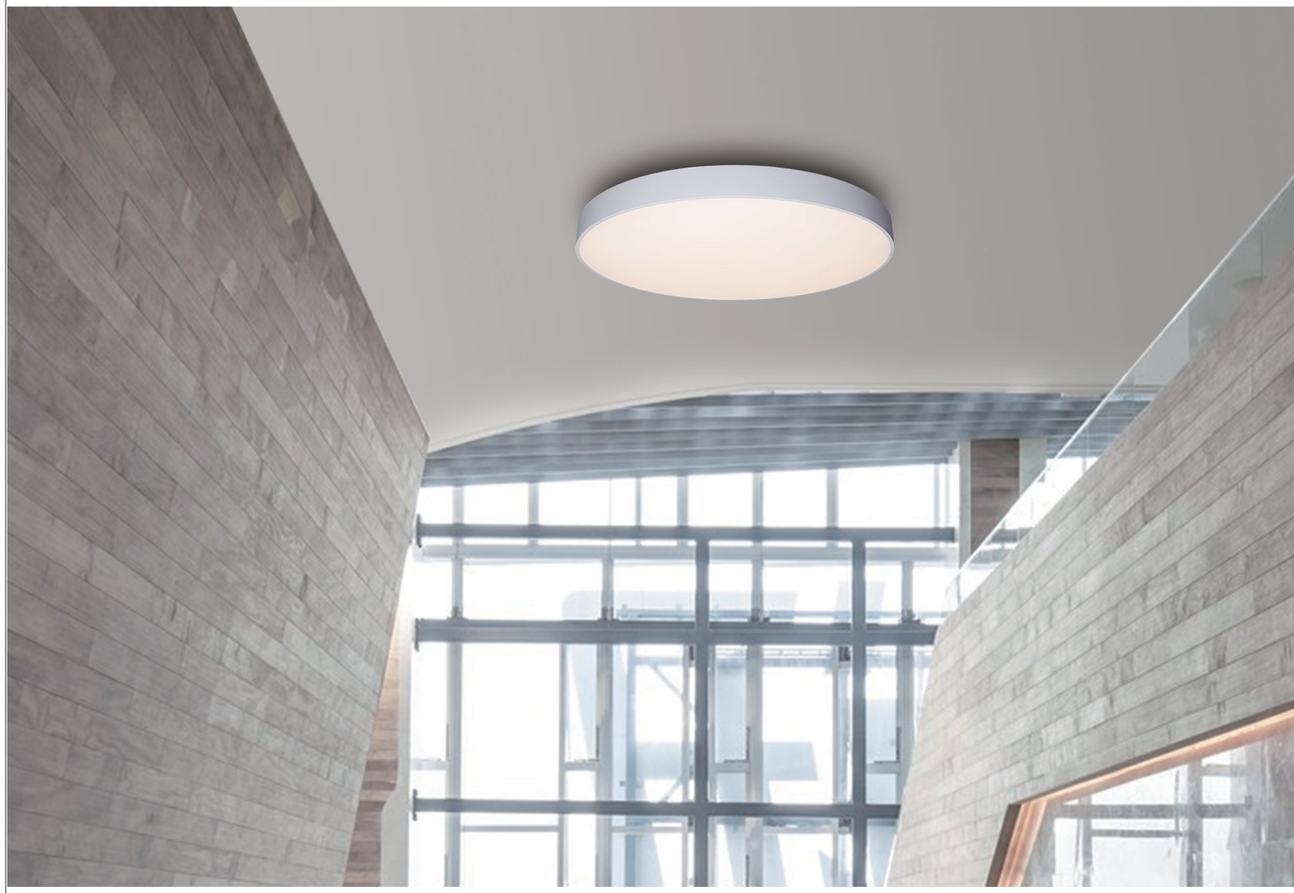

CARLO



20W



5W



10W



30W

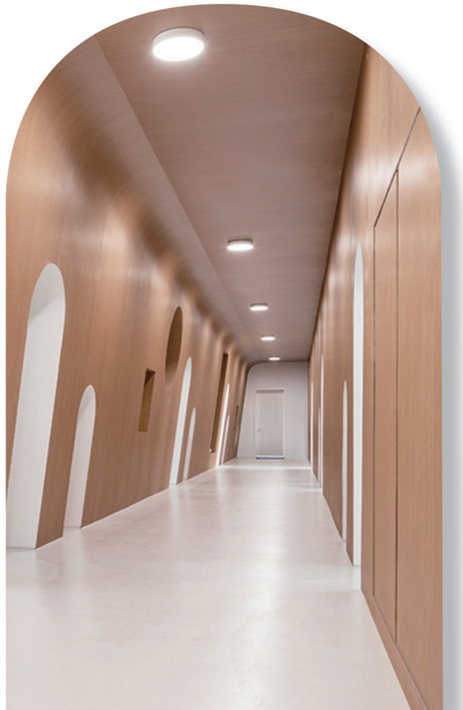

CARLO

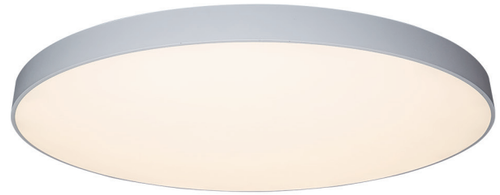

114W



40W



60W

CARLO









DLC73029/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 226Lm
Angle: 110°
CTN: 30
Material: Aluminum

DLC73029/10W

LED: Bridgelux SMD
Power: 10W
Flux(Lm): 580Lm
Angle: 110°
CTN: 27
Material: Aluminum

DLC73029/20W

LED: Bridgelux SMD
Power: 20W
Flux(Lm): 1350Lm
Angle: 110°
CTN: 12
Material: Aluminum









DLC73029/30W

LED: Bridgelux SMD
Power: 30W
Flux(Lm): 2100Lm
Angle: 110°
CTN: 6
Material: Aluminum

DLC73029/40W

LED: Bridgelux SMD
Power: 40W
Flux(Lm): 3130Lm
Angle: 110°
CTN: 1
Material: Aluminum

DLC73029/60W

LED: Bridgelux SMD
Power: 60W
Flux(Lm): 5250Lm
Angle: 110°
CTN: 1
Material: Aluminum

DLC73029/114W

LED: Bridgelux SMD
Power: 114W
Flux(Lm): 10000Lm
Angle: 110°
CTN: 1
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP	CRI
20	90

CARLO







DL73029/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 226Lm
Angle: 110°
CTN: 30
Material: Aluminum

DL73029/10W

LED: Bridgelux SMD
Power: 10W
Flux(Lm): 580Lm
Angle: 110°
CTN: 18
Material: Aluminum

DL73029/20W

LED: Bridgelux SMD
Power: 20W
Flux(Lm): 1350Lm
Angle: 110°
CTN: 12
Material: Aluminum









DL73029/30W

LED: Bridgelux SMD
Power: 30W
Flux(Lm): 2100Lm
Angle: 110°
CTN: 6
Material: Aluminum

DL73029/40W

LED: Bridgelux SMD
Power: 40W
Flux(Lm): 3130Lm
Angle: 110°
CTN: 1
Material: Aluminum

DL73029/60W

LED: Bridgelux SMD
Power: 60W
Flux(Lm): 5250Lm
Angle: 110°
CTN: 1
Material: Aluminum

DL73029/114W

LED: Bridgelux SMD
Power: 114W
Flux(Lm): 10000Lm
Angle: 110°
CTN: 1
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP	CRI
20	90

CARLO



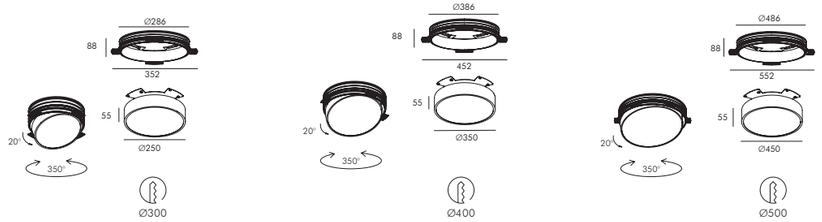

DL73030/20W

LED: Bridgelux SMD
Power: 20W
Flux(Lm): 1350Lm
Angle: 110°
CTN: 4
Material: Aluminum

DL73030/30W

LED: Bridgelux SMD
Power: 30W
Flux(Lm): 2100Lm
Angle: 110°
CTN: 1
Material: Aluminum

DL73030/40W

LED: Bridgelux SMD
Power: 40W
Flux(Lm): 3130Lm
Angle: 110°
CTN: 1
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP	CRI
20	90

CARLO



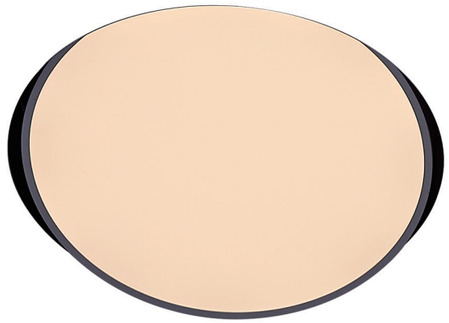





MACARON



MACARON



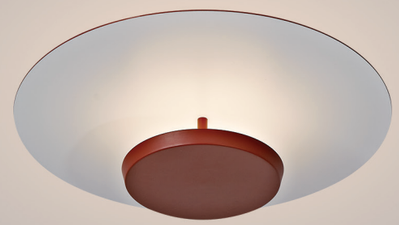

MACARON



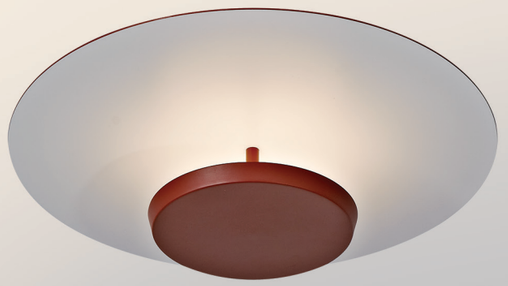

MACARON





XD4003/12W

LED: Bridgelux SMD
Power: 12W
CTN: 1
Material: Iron+Aluminum

XD4004/24W

LED: Bridgelux SMD
Power: 24W
CTN: 1
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black +White
Brown Sand Texture+White

IP	CRI
20	90



MACARON





HL77019/12W

LED: Bridgelux SMD
Power: 12W
CTN: 1
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black +White
Brown Sand Texture+White

IP 20

CRI 90

MACARON

MACARON

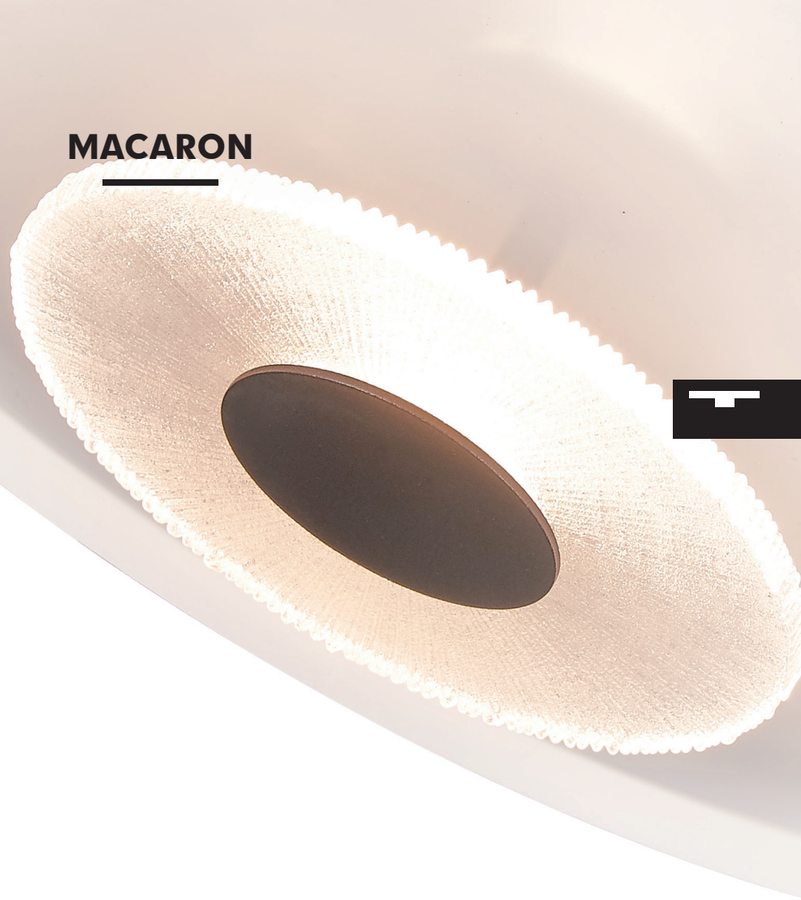



WLB182/5W

LED: Bridgelux SMD
Power: 5W
CTN: 1
Material: Iron+Glass



WLB183/8W

LED: Bridgelux SMD
Power: 8W
CTN: 1
Material: Iron+Glass

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black+White
Sand Green Grey+White
Brown Sand Texture+Black

IP 20

CRI 90



MACARON





TD3011/24W

LED: Bridgelux SMD
Power: 24W
CTN: 1
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Brown Sand Texture
Sand Black

ON/OFF Short pression
DIM Long pression
IP 20
CRI 90

MACARON

MACARON





LL8122/24W

LED: Bridgelux SMD
Power: 24W
CTN: 1
Material: Iron+Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Brown Sand Texture
Sand Black

ON/OFF Short pression
DIM Long pression
IP 20
CRI 90

LED HANGING
LIGHT
SERIES

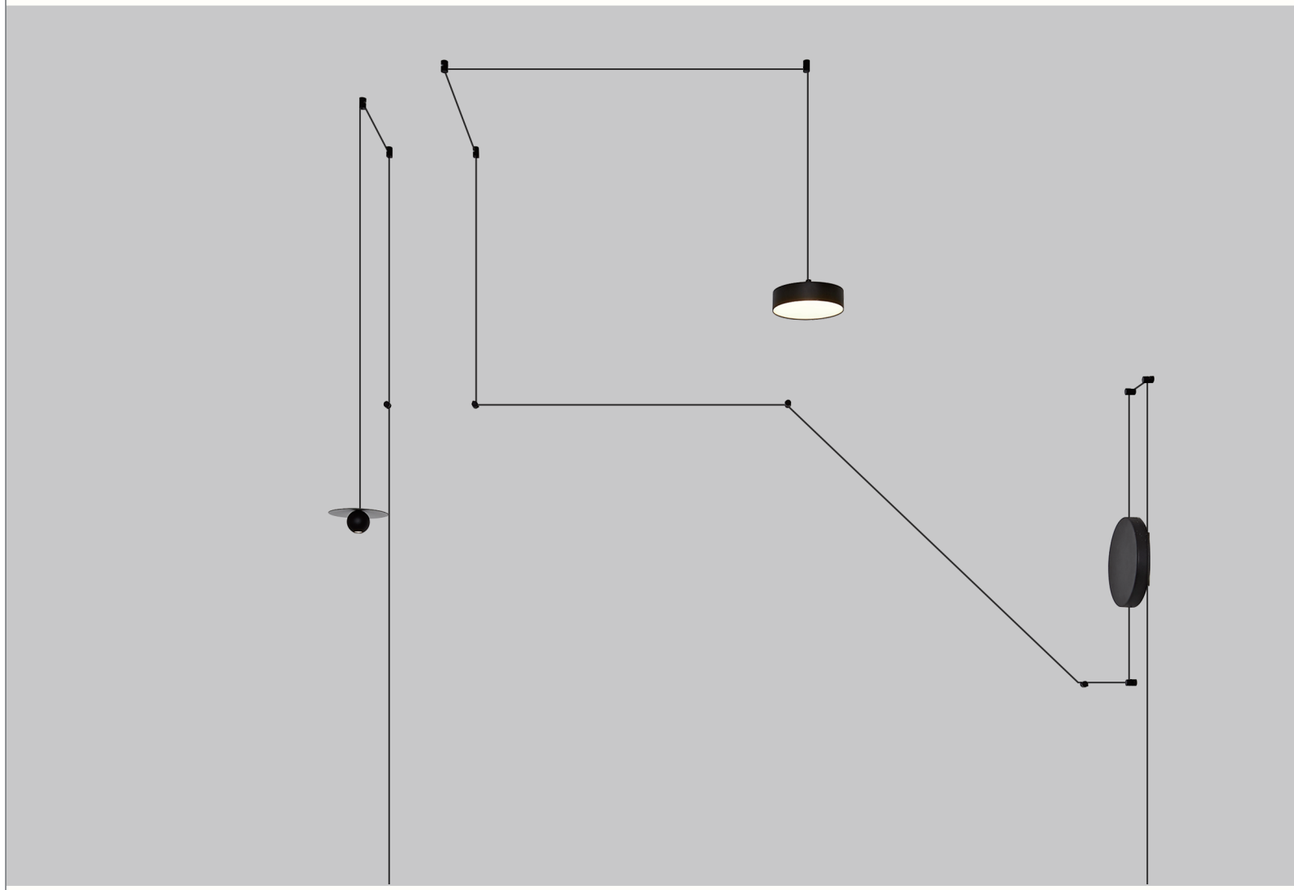


ANCO

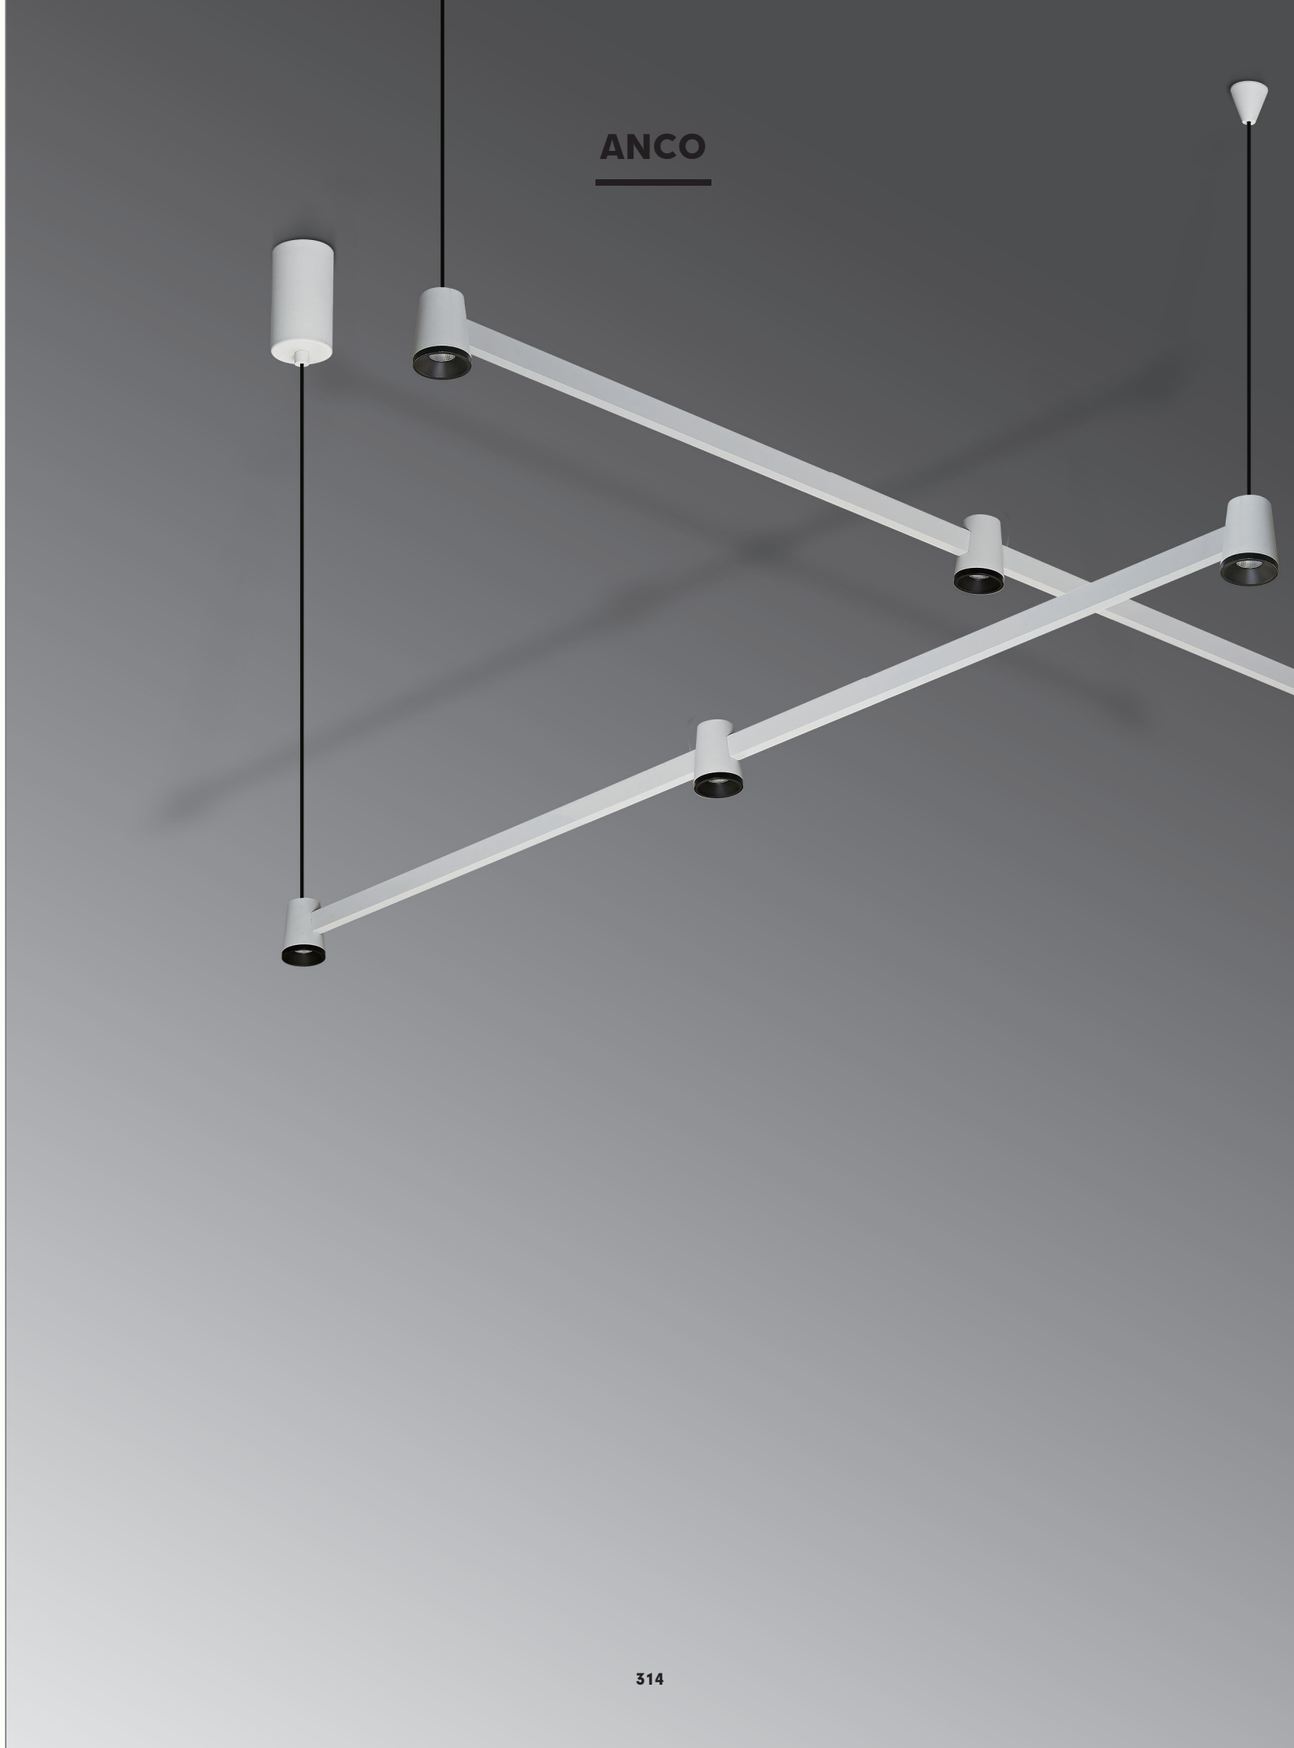
ANCO

ANCO



ANCO









HL7740/3 x 5W

LED: Bridgelux SMD
Power: 3x5W
Flux(Lm): 418Lm/LED
Angle: 20°+35°+20°
CTN: 8
Material: Aluminum

HL7741/3 x 5W

LED: Bridgelux SMD
Power: 3x5W
Flux(Lm): 418Lm/LED
Angle: 20°/35°
CTN: 8
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Gold+Black

IP 20 CRI 90



ANCO



ANCO

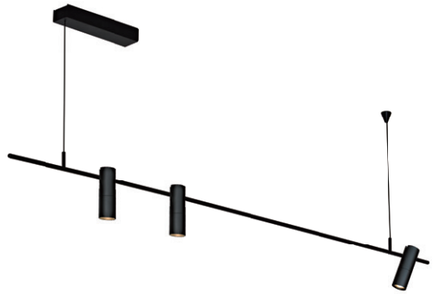



HL77055/3 x 7W

LED: Bridgelux COB
Power: 3x7W
Flux(Lm): 335Lm/LED
Angle: 18°/24°/36°
CTN: 1
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP	CRI
20	90







Short pression turns on/ off,long pression dims the light

WLB205/8W

LED: Strip LED
Power: 8W
Flux(Lm): /Lm
Angle: /
CTN: 4
Material: Aluminum

Colortemperature

3000K 4000K

Color

Gold

IP	CRI
20	90

ANCO





Short pression turns on/ off,long pression dims the light



Short pression turns on/ off,long pression dims the light

HL77062/30W

LED: Strip LED
Power: 30W
Flux(Lm): /Lm
Angle: /
CTN: 1
Material: Aluminum

HL77057/25W

LED: Strip LED
Power: 25W
Flux(Lm): /Lm
Angle: /
CTN: 1
Material: Aluminum

Colortemperature

3000K 4000K

Color

Gold

IP	CRI
20	90

DOUAI









HL7748/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 373Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

HL7749/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 373Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

HL7750/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 373Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand white+Black
Sand black+white

IP 20 | CRI 90

VERDUN









HL7751/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 287Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

HL7752/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 278Lm
Angle: 60°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color (HL7751)

Sand white+Black
Sand black

Color (HL7752)

Sand white
Sand black

IP 20 | CRI 90


MILK

MILK



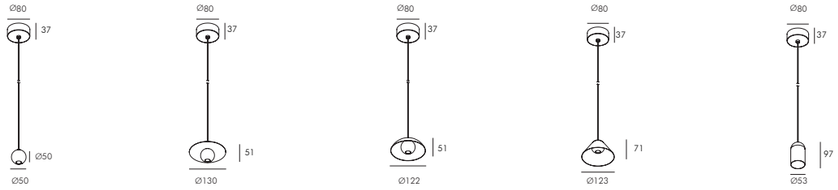

HL7753/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 341Lm/
HL7757(312Lm)
Angle: 20°/35°
CTN: 20
Material: Aluminum

HL7754/5W

HL7755/5W

HL7756/5W

HL7757/5W



Colortemperature

2700K 3000K 4000K 5000K

Color (HL7753)

Sand White
Sand black
Coffee

Color (HL7754/55/56/57)

Sand White
Sand black+White
Coffee+White

IP	CRI
20	90









WLB198

LED: /
Power: 18W
Angle: /
CTN: 6
Material: iron





WLB198–MZ01/2W

LED: Smalite SMD
Power: 2W
Angle: 24°
CTN: 30
Material: Aluminum





WLB198–MZ02/2W

LED: Smalite SMD
Power: 2W
Angle: 110°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 3500K 4000K 5000K

Color

Brown
Brown+Black
Matt Black

IP 20
CRI 90









WLB198–MZ03/2W

LED: Smalite SMD
Power: 2W
Angle: 24°
CTN: 30
Material: Aluminum

WLB198–MZ04/2W

LED: Smalite SMD
Power: 2W
Angle: 24°
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 3500K 4000K 5000K

Color

Brown
Brown+Black

IP 20
CRI 90

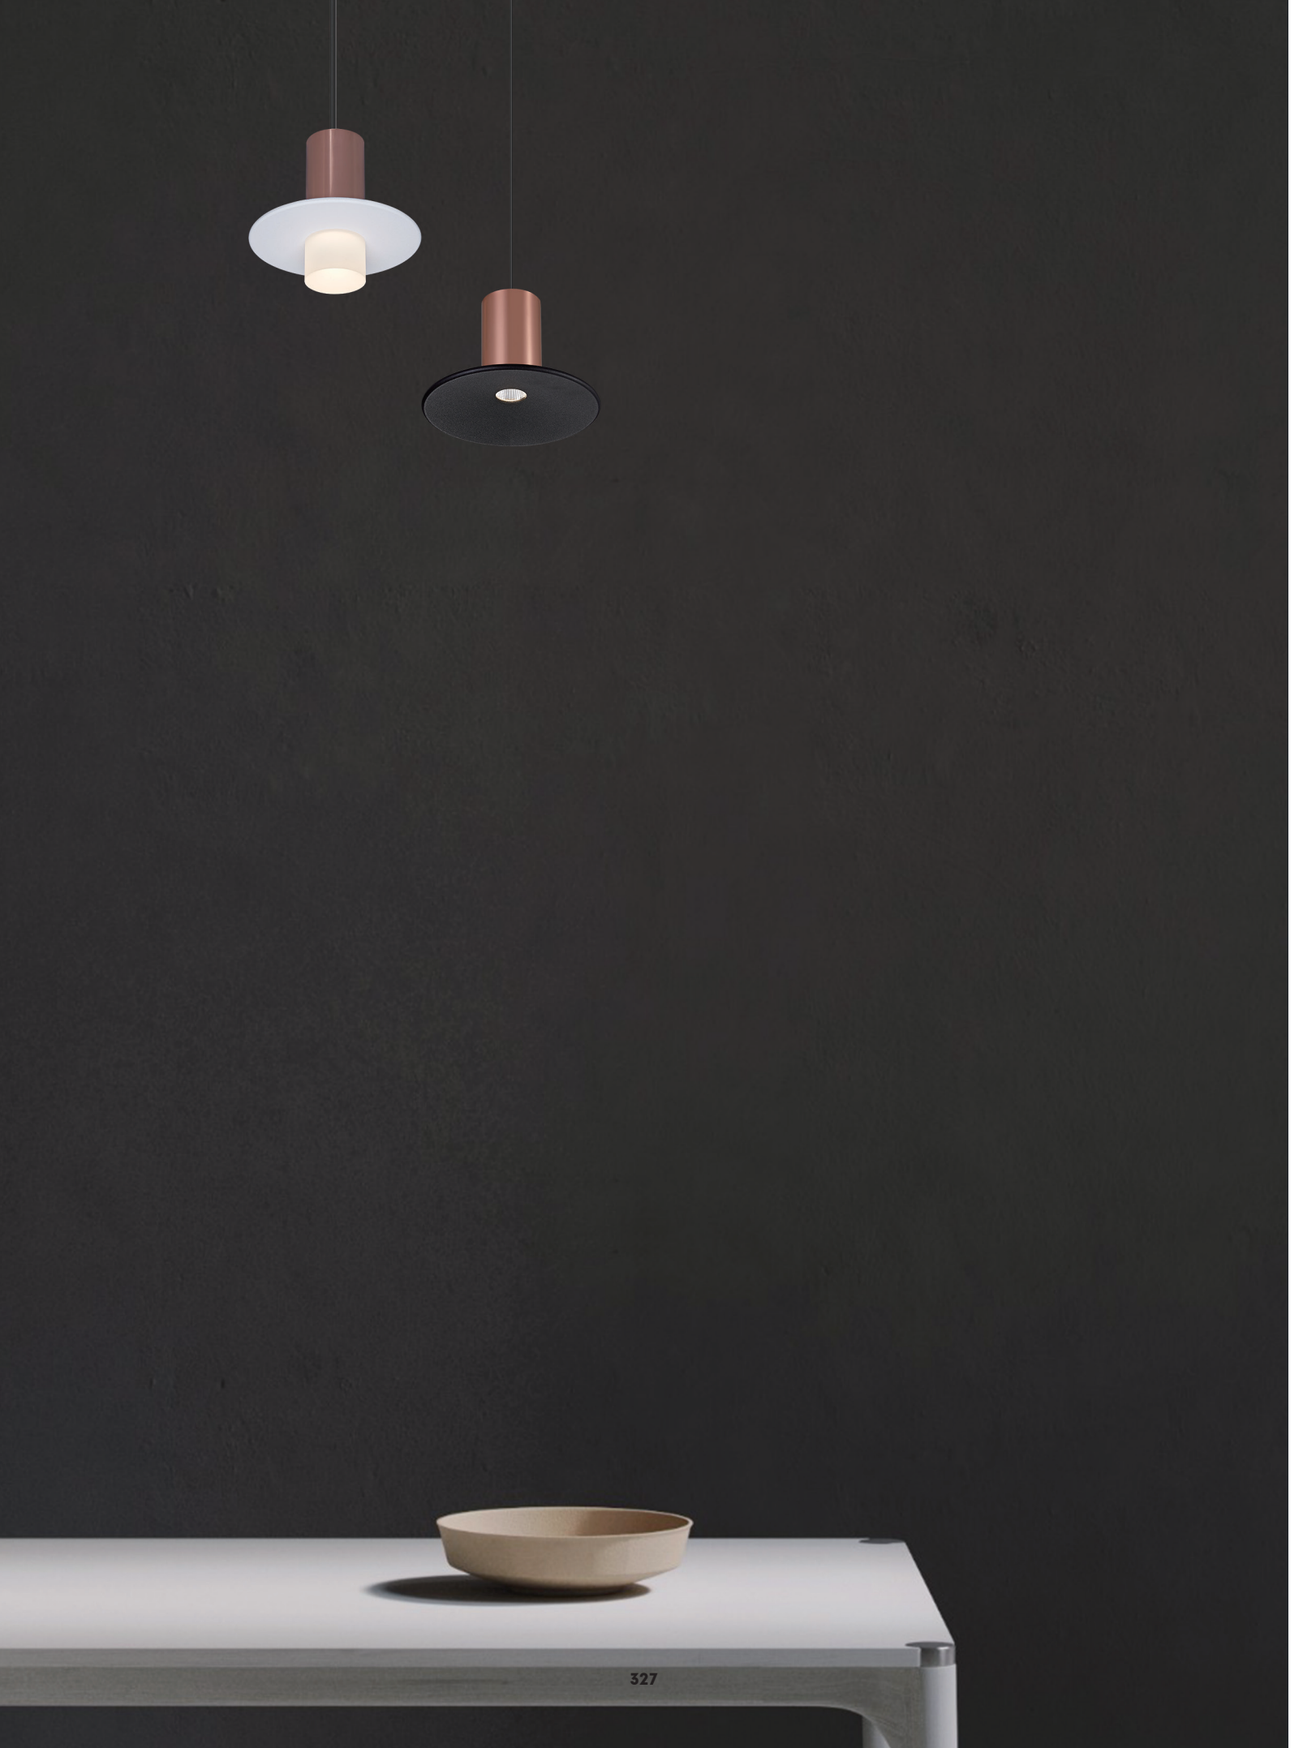

ROMEO



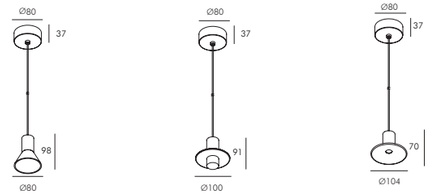

HL7730/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 430Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

HL7731/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 368Lm
Angle: 60°
CTN: 20
Material: Aluminum

HL7735/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 435Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black+rose gold
Sand White+rose gold
Chrome

IP 20

CRI 90

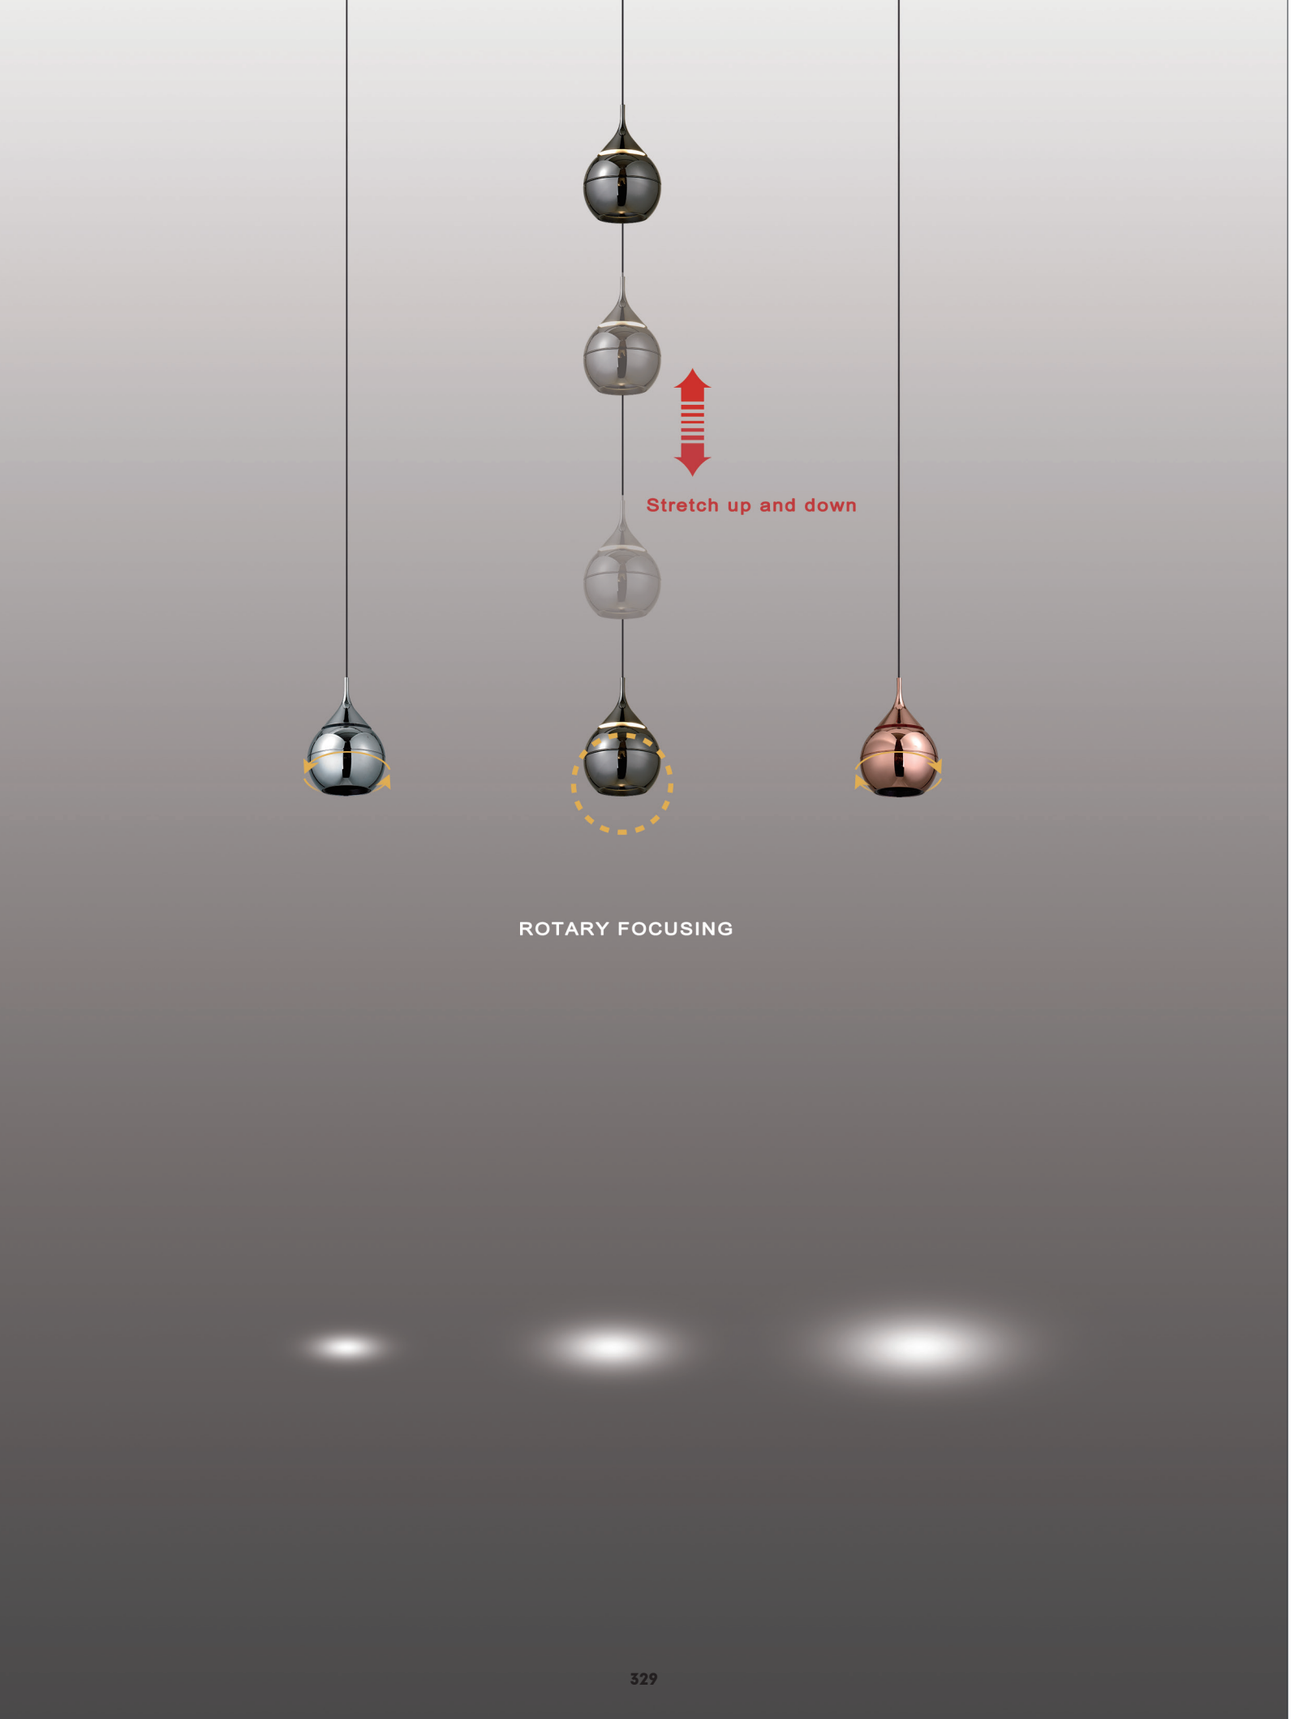

ROMEO





HL77052/7W

LED: Bridgelux SMD
BridgeluxCOB
Power: 7W
Flux(Lm): 606Lm10°
647Lm55°
Angle: 10°-55°
CTN: 6
Material: Aluminum

Colortemperature

3000K 4000K

Color (HL77052)

Pearl black
Chrome
Rose gold

IP	CRI
20	90

LED WALL
LIGHT
SERIES



JUNGLE



JUNGLE

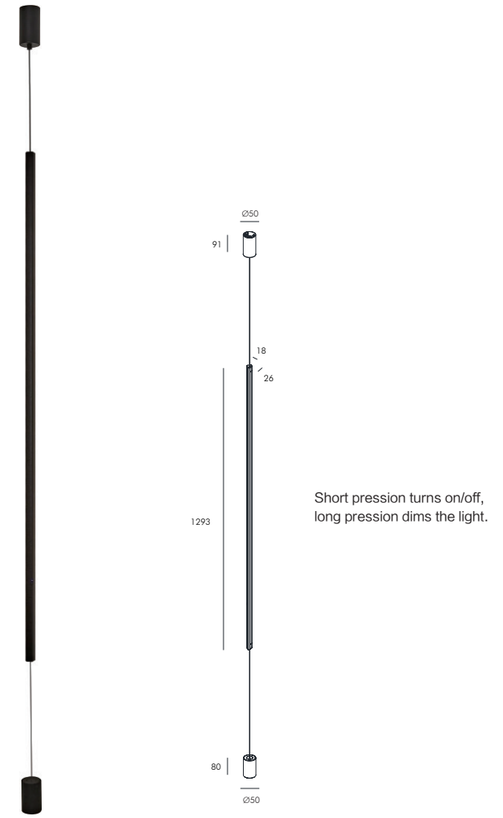

Short pression turns on/off,
long pression dims the light.

HL7777/14W

LED: Bridgelux SMD
Power: 14W
Angle: 110°
CTN: 6
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

ON/OFF Short pression
DIM Long pression
IP 20
CRI 90

JUNGLE

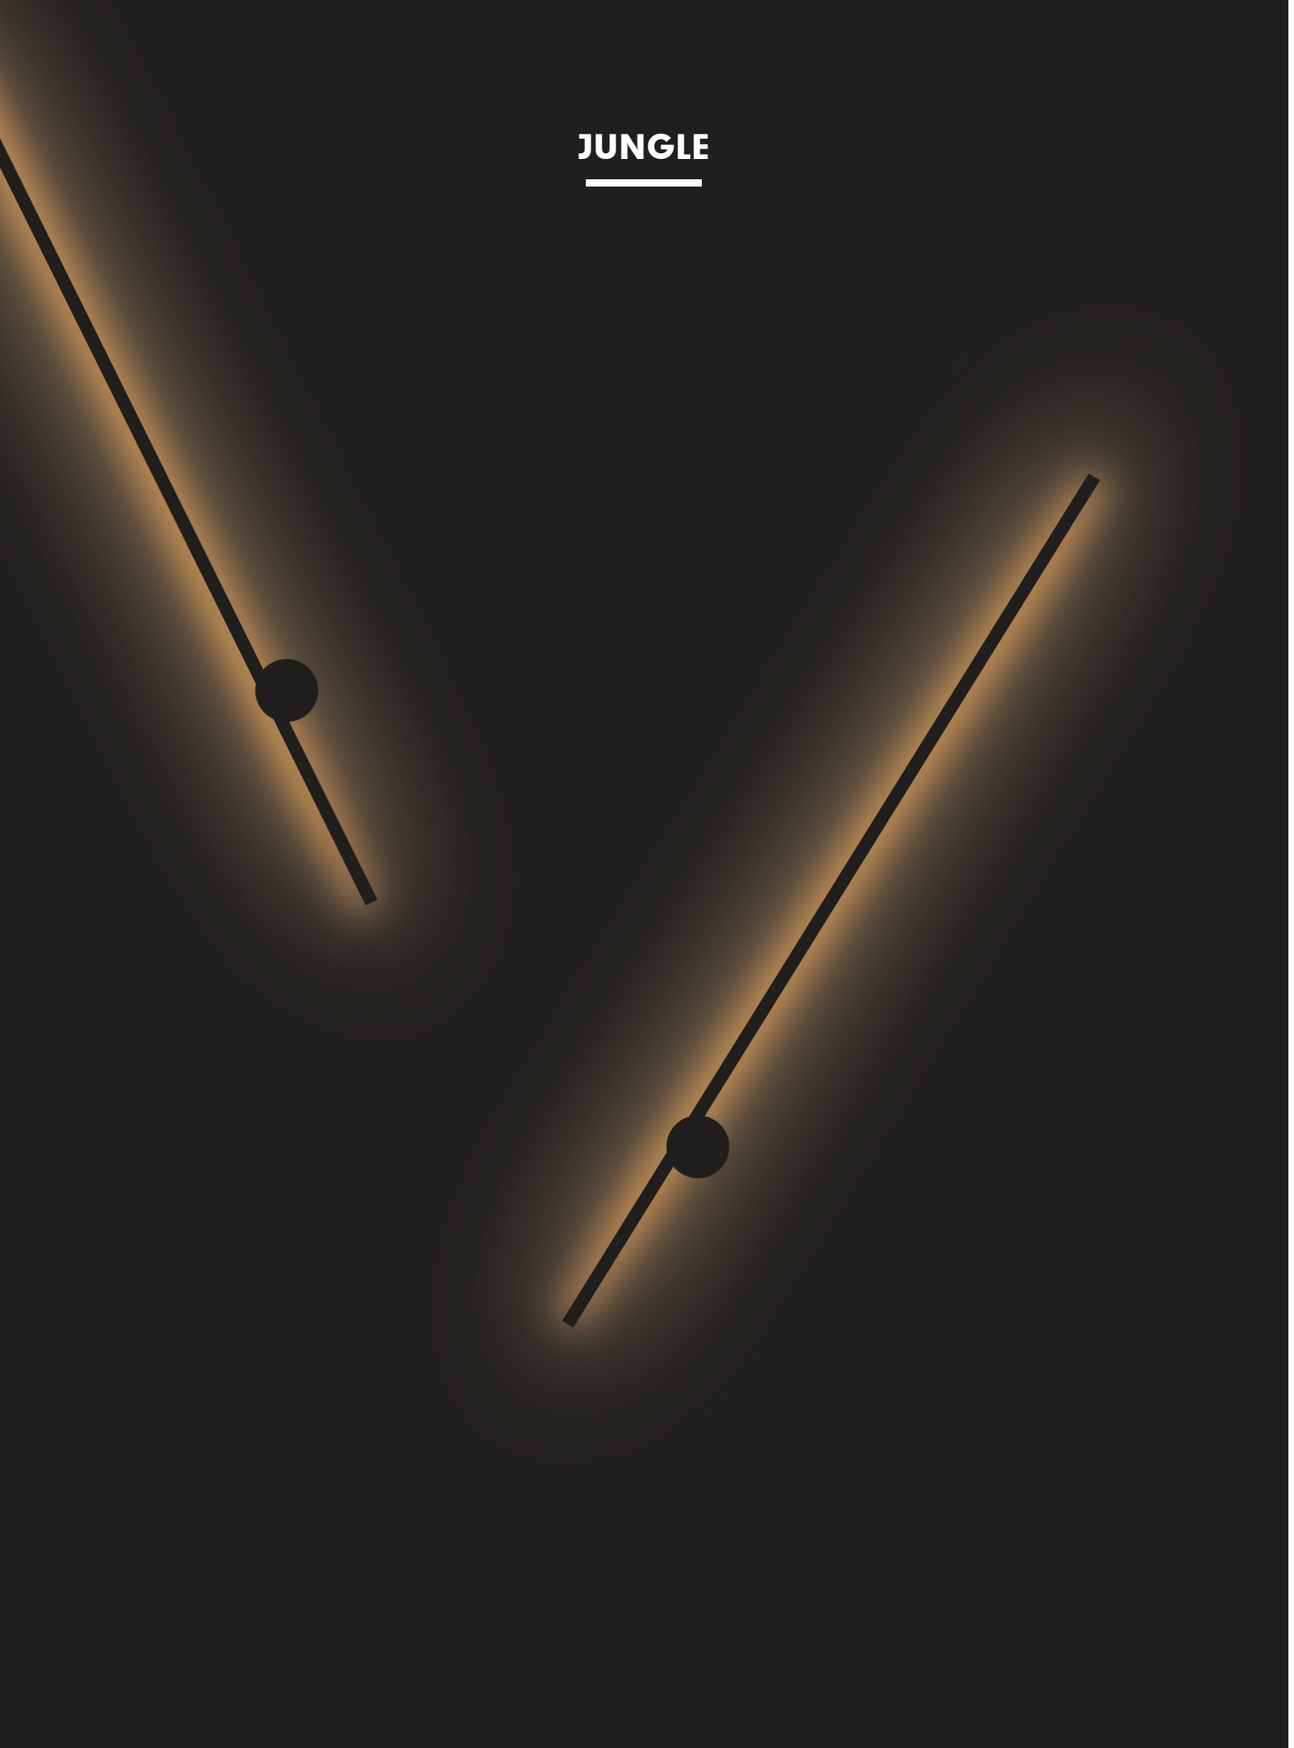

JUNGLE



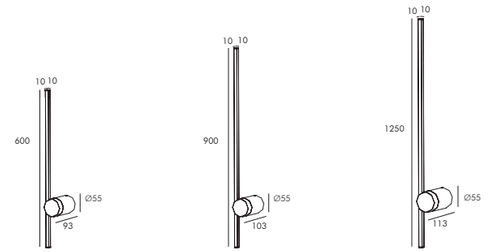

WLB100/7W

LED: Bridgelux SMD
Power: 7W
CTN: 12
Material: Aluminum

WLB101/9W

LED: Bridgelux SMD
Power: 9W
CTN: 8
Material: Aluminum

WLB102/12W

LED: Bridgelux SMD
Power: 12W
CTN: 6
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP 20 | CRI 90

LED
FLOOR LIGHT
SERIES



TRANI

TRANI









HL77028/9W

LED: Bridgelux COB
Power: 9W
Angle: 24°/15°/35°
CTN: 1
Material: Iron+Glass

HL77029/3 x 9W

LED: Bridgelux SMD
Power: 3×9W
Angle: 24°/15°/35°
CTN: 1
Material: Iron+Glass

HL77030/5 x 9W

LED: Bridgelux SMD
Power: 5×9W
Angle: 24°/15°/35°
CTN: 1
Material: Iron+Glass

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP	CRI
20	90

TRANI



WLB176/7W

LED: Bridgelux COB
Power: 7W
Angle: 24°/15°/35°
CTN: 1
Material: Iron+Glass

Color

Sand Black

Colortemperature

2700K 3000K 4000K 5000K

IP 20 | CRI 90

TRANI





LL8127/2 x 5W

LED: Bridgelux SMD
Power: 2×5W
Angle: 120°
CTN: 1
Material: Iron+Glass

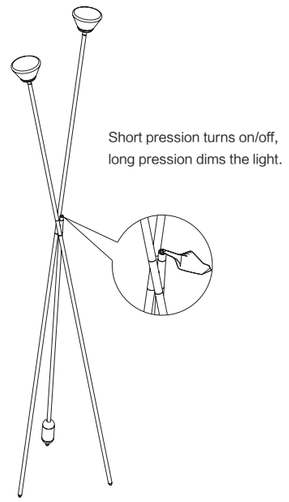

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP 20 | CRI 90









HL77056/7W

LED: Bridgelux COB
Power: 7W
Angle: 24°
CTN: 1
Material: Iron+Glass

WLB195/7W

LED: Bridgelux COB
Power: 7W
Angle: 24°
CTN: 1
Material: Iron+Glass

Colortemperature

2700K 3000K 4000K

Color

Matte black + smokey grey

IP	CRI
20	90

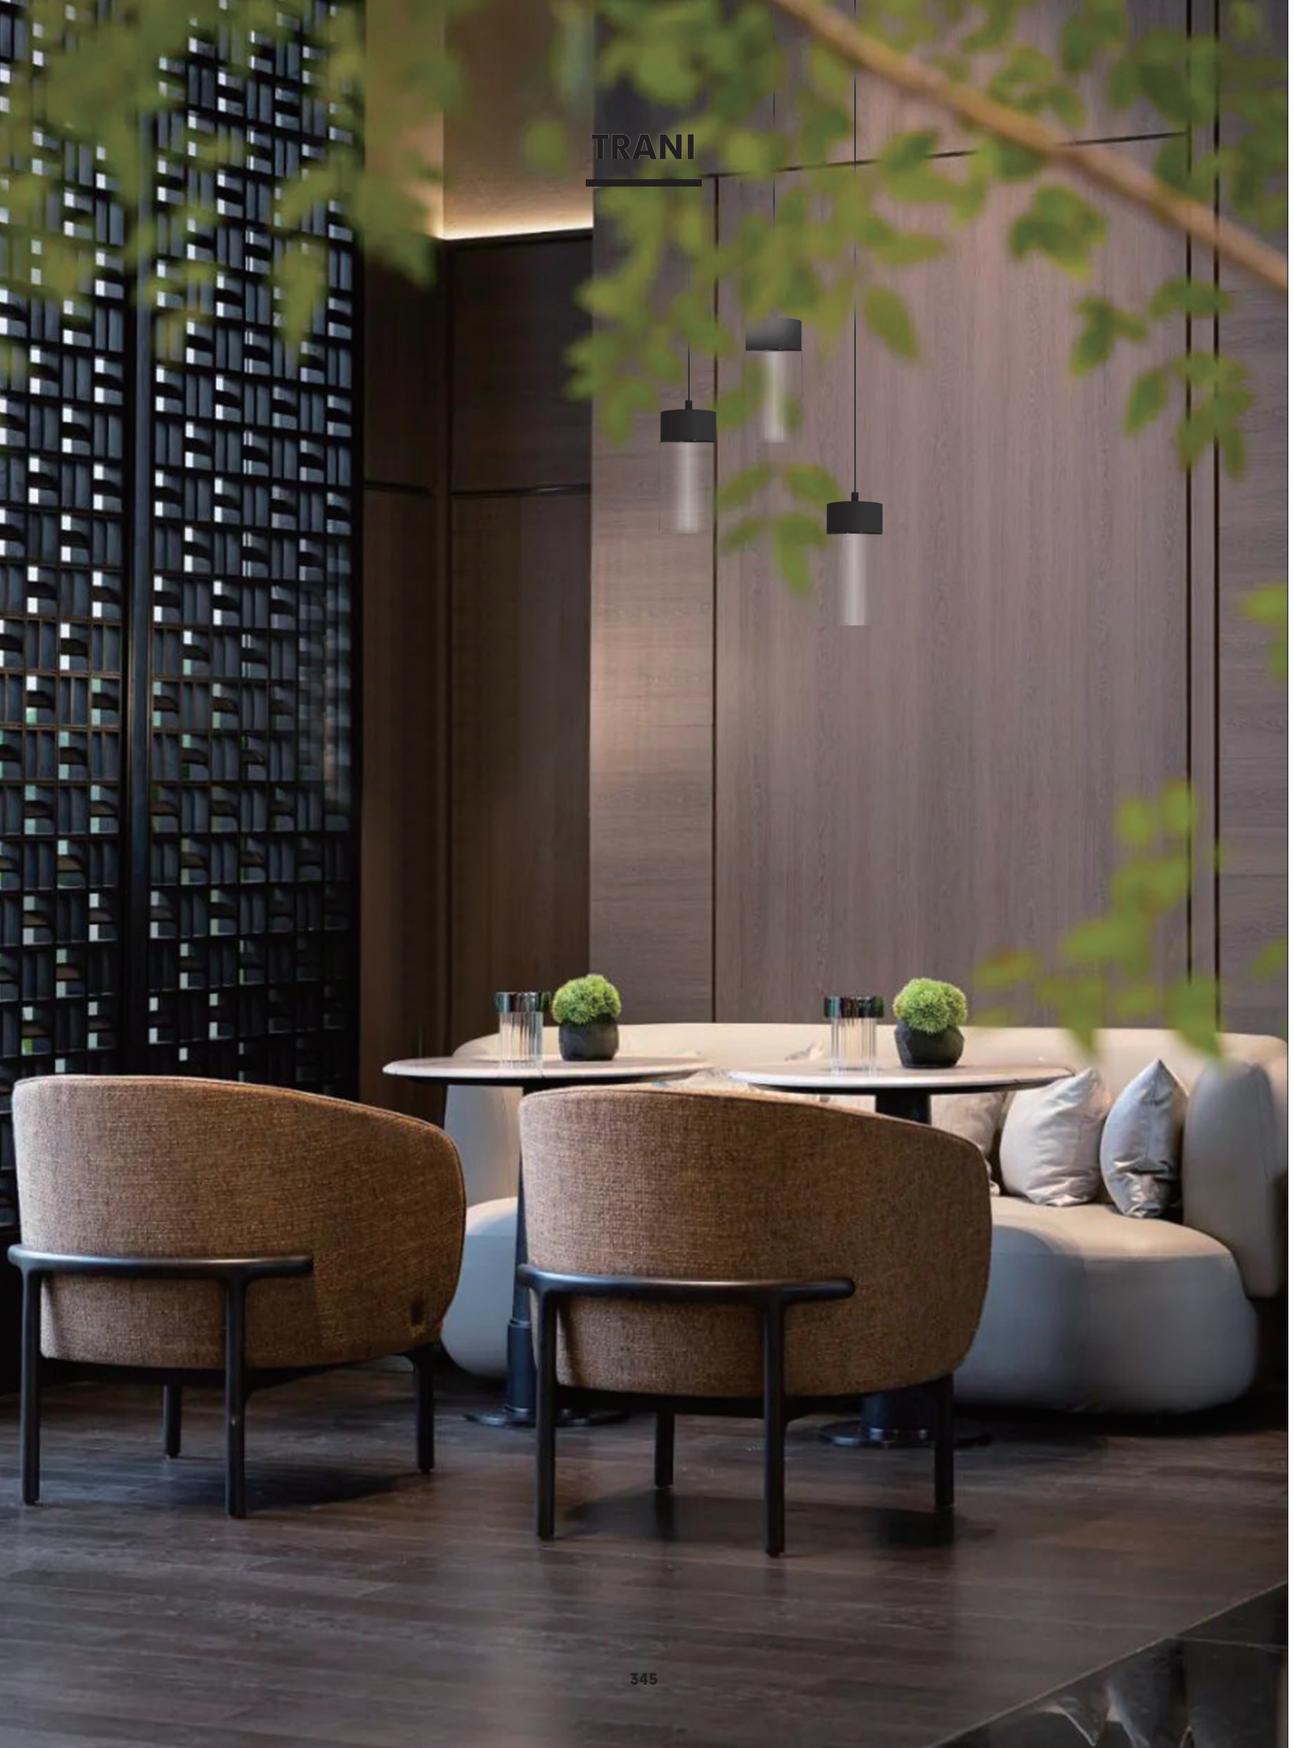

TRANI





HL7772/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 315Lm
Angle: 15°/20°/30°
CTN: 20
Material: Aluminum



HL7773/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 328Lm
Angle: 10°/20°/30°
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Matte black

IP	CRI
20	90

TRANI

TRANI





HL7774/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 415Lm
Angle: /
CTN: 8
Material: Aluminum



HL7775/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 415Lm
Angle: /
CTN: 8
Material: Aluminum



HL7776/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 415Lm
Angle: /
CTN: 8
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Matt Black

IP	CRI
20	90

TRANI

TRANI







HL77060/8W

LED: Bridgelux COB
Power: 8W
Angle: /
CTN: 1
Material: Aluminum

HL77061/20W

LED: Bridgelux COB
Power: 20W
Angle: /
CTN: 1
Material: Aluminum

Colortemperature

2700K 3000K 4000K

Color

Matte black + smokey grey

IP 20

CRI 90



BECK





LL8109/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 516Lm
Angle: 24°/15°/30°
CTN: 1
Material: Aluminum+Iron

LL8110/2 x 10W

LED: Bridgelux COB
Power: 2x10W
Flux(Lm): 2x516Lm
Angle: 24°/15°/30°
CTN: 1
Material: Aluminum+Iron

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP	CRI
20	90







BECK

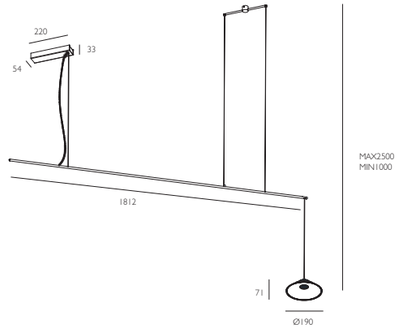

HL7798/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 516Lm
Angle: 24°/15°/30°
CTN: 1
Material: Aluminum+Iron

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP	CRI
20	90



LL8111/12W

LED: Bridgelux SMD
Power: 12W
Angle: 120°
CTN: 1
Material: Aluminum+Iron

Short pression turns on/off,
long pression dims the light.

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

ON/OFF Short pression
DIM Long pression

IP	CRI
20	90





TD3005/12W

LED: Bridgelux SMD
Power: 12W
CTN: 1
Material: Aluminum+Iron

Color

Sand White
Sand Black

Colortemperature

2700K 3000K 4000K 5000K

ON/OFF Short pression
DIM Long pression
IP 20
CRI 90





WLB155/12W

LED: Bridgelux SMD
Power: 12W
CTN: 12
Material: Aluminum+Iron

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand white
Sand Black

IP 20
CRI 90

VELA

VELA



Short pression turns on/off,
long pression dims the light.





LL8116/27W

LED: Bridgelux SMD
Power: 27W
CTN: 1
Material: Aluminum+Iron



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black



VELA

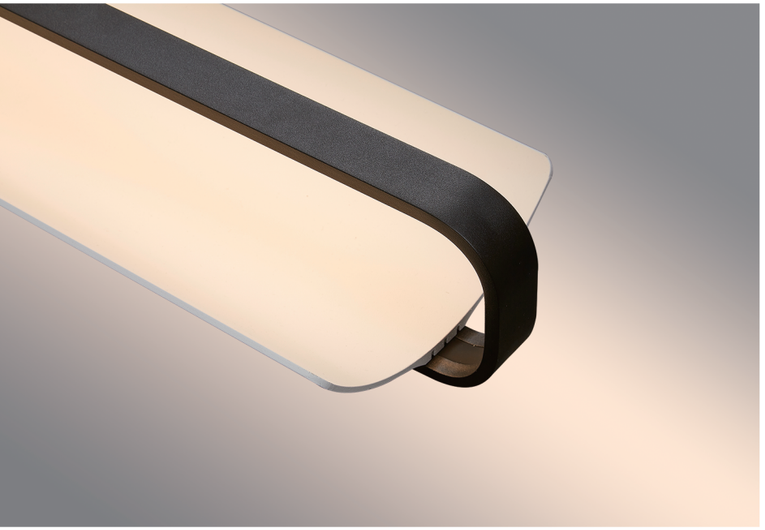

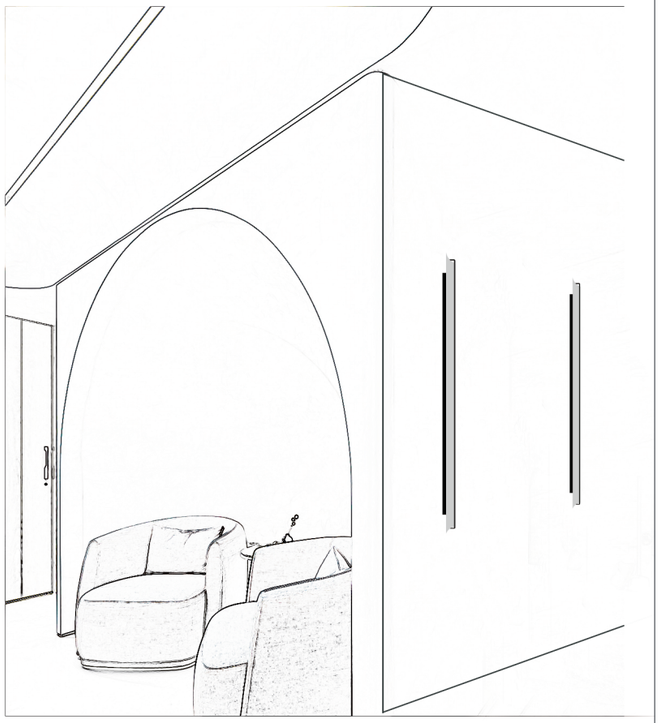

VELA



VELA



VELA



VELA







WLB168/20W

LED: Bridgelux SMD
Power: 20W
CTN: 1
Material: Aluminum

WLB169/28W

LED: Bridgelux SMD
Power: 28W
CTN: 1
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP	CRI
20	90

VELA









HL77016/27W

LED: Bridgelux SMD
Power: 27W
CTN: 1
Material: Aluminum

HL77017/35W

LED: Bridgelux SMD
Power: 35W
CTN: 1
Material: Aluminum

HL77018/45W

LED: Bridgelux SMD
Power: 45W
CTN: 1
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP	CRI
20	90



THE LIGHTS DIM A WORLD OF LIGHTS.





ROSA

ROSA













HL7784/25W

LED: Bridgelux SMD
Power: 25W
Angle: 24°/36°
CTN: 1
Material: Aluminum

HL7785/25W

LED: Bridgelux SMD
Power: 25W
Angle: 24°/36°
CTN: 1
Material: Aluminum

HL7786/38W

LED: Bridgelux SMD
Power: 38W
Angle: 24°/36°
CTN: 1
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Gold+Black
Sand black

IP 20

CRI 90

ROSA



ROSA



ROSA

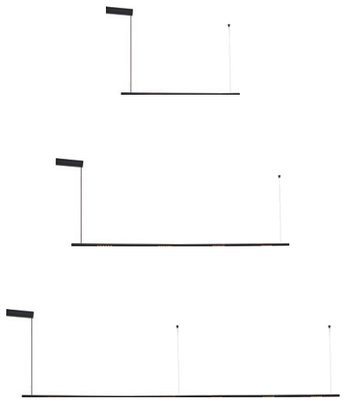







HL7787/13W

LED: Bridgelux SMD
Power: 13W
Angle: 24°/36°
CTN: 6
Material: Aluminum

HL7788/25W

LED: Bridgelux SMD
Power: 25W
Angle: 24°/36°
CTN: 6
Material: Aluminum

HL7789/38W

LED: Bridgelux SMD
Power: 38W
Angle: 24°/36°
CTN: 6
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Gold+Black
Sand black

IP 20 | CRI 90

ROSA



ROSA

ROSA



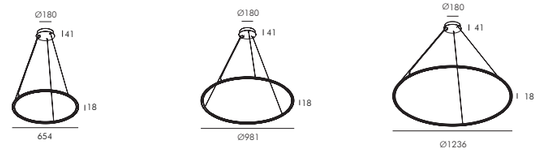

HL7792/28W

LED: Bridgelux SMD
Power: 28W
Angle: 110°
CTN: 1
Material: Aluminum

HL7790/38W

LED: Bridgelux SMD
Power: 38W
Angle: 110°
CTN: 1
Material: Aluminum

HL7791/48W

LED: Bridgelux SMD
Power: 48W
Angle: 110°
CTN: 1
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 20 CRI 90

ROSA



ROSA



TD3002/12W

LED: OSRAM SMD
Power: 12W
Angle: 24°/15°
CTN: 4
Material: Aluminum





Short pression turns on/off,
long pression dims the light.

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand white+black
Sand Black



ROSA

ROSA



LL8101/12W+6W

LED: OSRAM SMD+Bridgelux SMD
Power: 12+6W
Angle: 24°/15°+110°
CTN: 1
Material: Aluminum



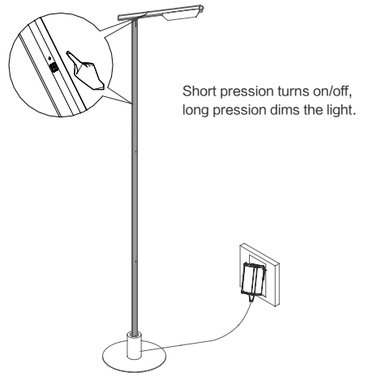

Short pression turns on/off,
long pression dims the light.

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand white+black
Sand Black

ON/OFF Short pression
DIM Long pression
IP 20
CRI 90



ROSA



LL8102/18W

LED: Bridgelux SMD
Power: 18W
Angle: 110°
CTN: 1
Material: Aluminum



Short pression turns on/off,
long pression dims the light.

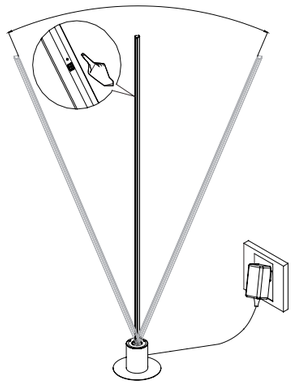

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand Black

ON/OFF Short pression | DIM Long pression | IP 20 | CRI 90





ALICE









WLB184/15W

LED: Bridgelux SMD
Power: 15W
Angle: 110°
CTN: 8
Material: Aluminum

WLB185/20W

LED: Bridgelux SMD
Power: 20W
Angle: 110°
CTN: 8
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP	CRI
20	90



ALICE

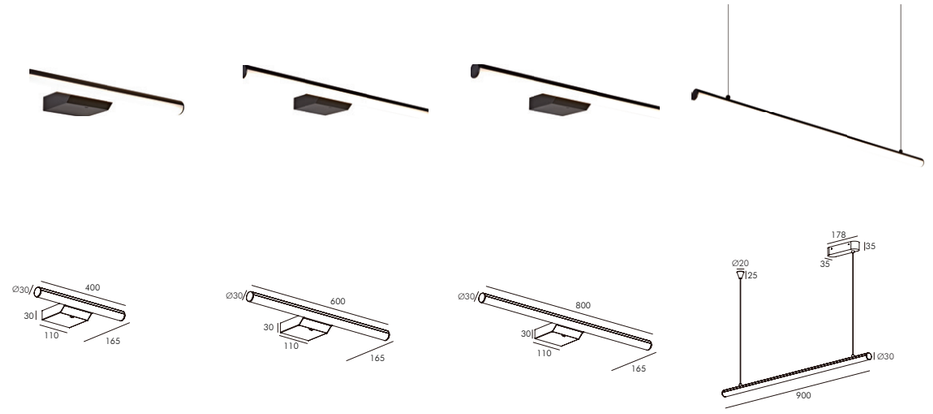

WLB186/10W

LED: Bridgelux SMD
Power: 10W
Angle: 110°
CTN: 12
Material: Aluminum

WLB187/15W

LED: Bridgelux SMD
Power: 15W
Angle: 110°
CTN: 10
Material: Aluminum

WLB188/18W

LED: Bridgelux SMD
Power: 18W
Angle: 110°
CTN: 10
Material: Aluminum

HL77037/20W

LED: Bridgelux SMD
Power: 20W
Angle: 110°
CTN: 8
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 20 CRI 90


GARDENA


GARDENA
3 5 0 °
9 0 °

GARDENA



SL74248–1/1x7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 446Lm
Angle: 24°/20°/35°
CTN: 1
Material: Aluminum

SL74248–3/3x7W

LED: Bridgelux COB
Power: 3x7W
Flux(Lm): 3x446Lm
Angle: 24°/20°/35°
CTN: 1
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

IP	CRI
20	90

GARDENA



GARDENA

GARDENA





Short pression turns on/off,
long pression dims the light.

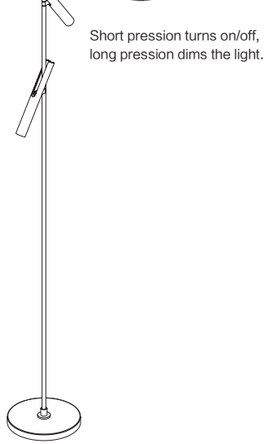

LL8117/2x7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 2x364Lm
Angle: 30°/45°
CTN: 1
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

ON/OFF Short pression | DIM Long pression | IP 20 | CRI 90

GARDENA



GARDENA



TD3006/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 364Lm
Angle: 30°/45°
CTN: 1
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black

ON/OFF Short pression
DIM Long pression
IP 20
CRI 90

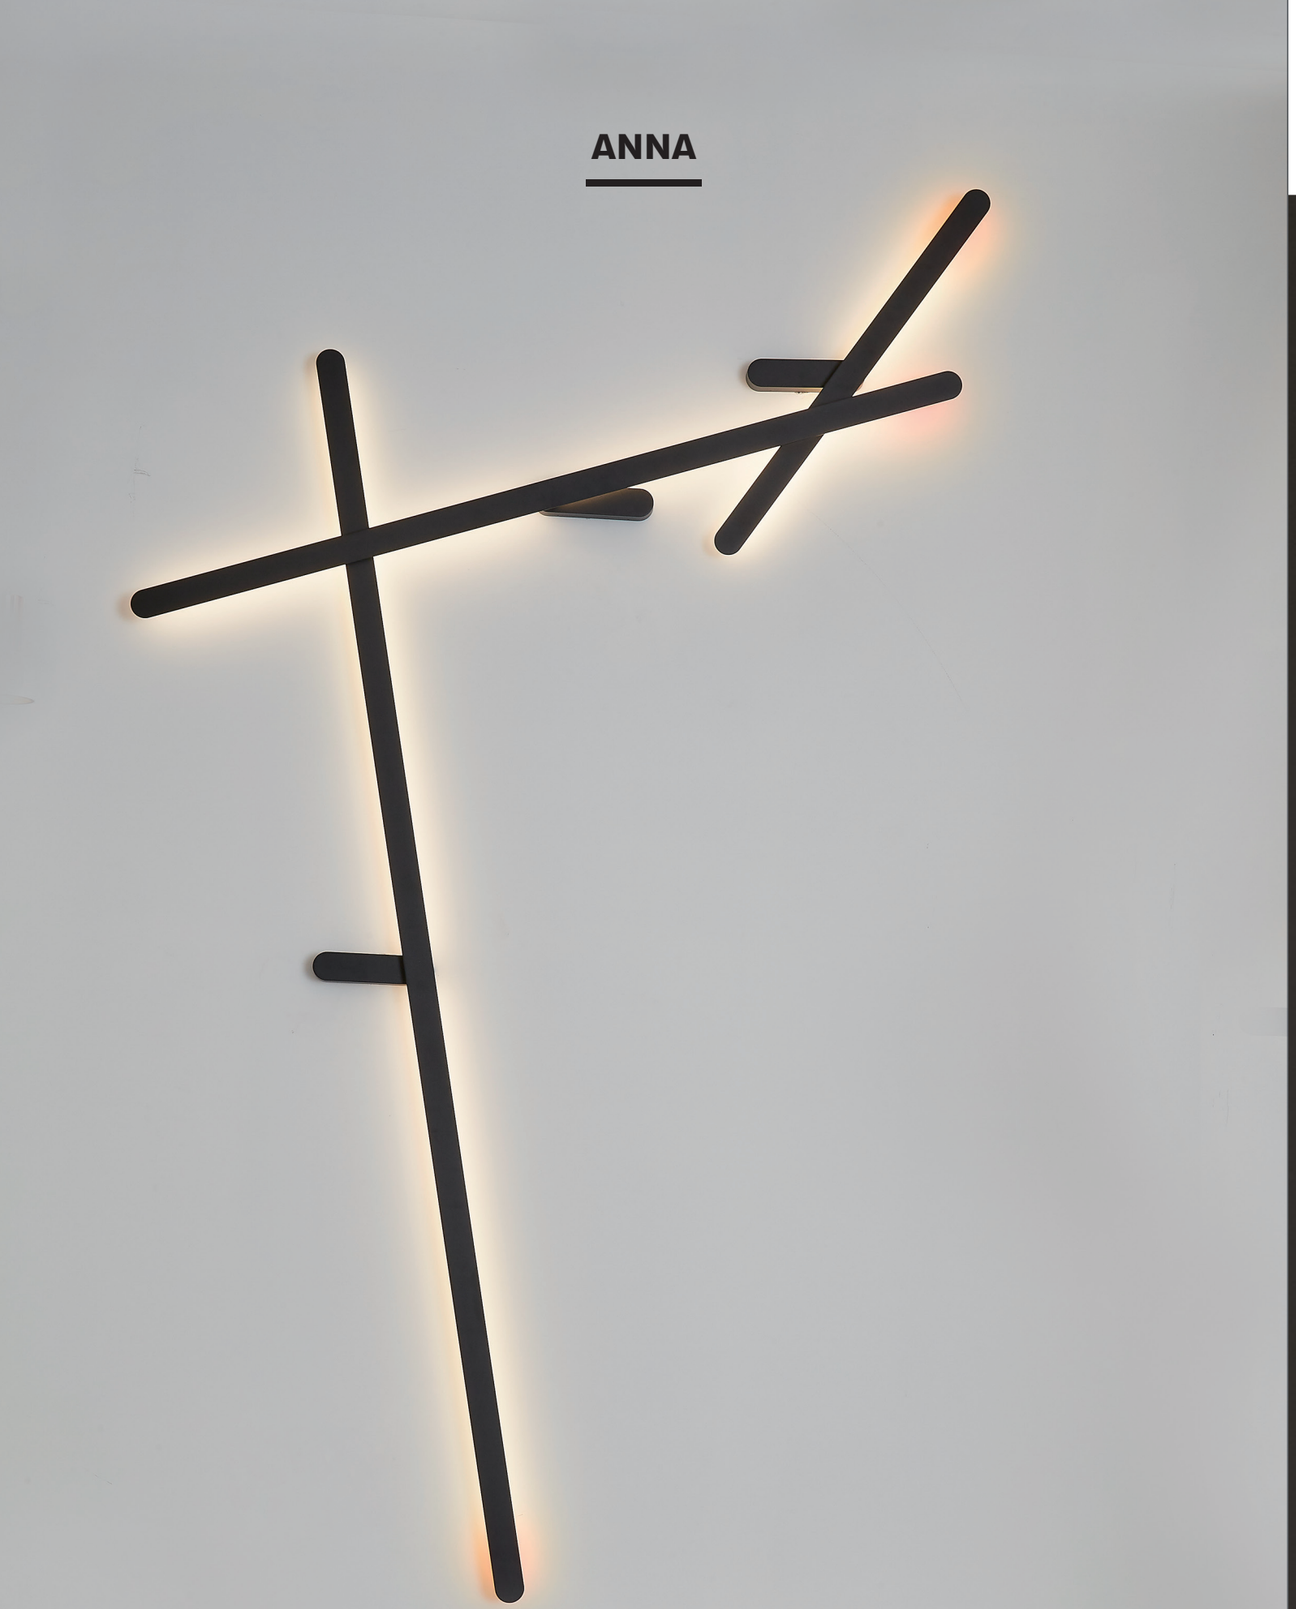



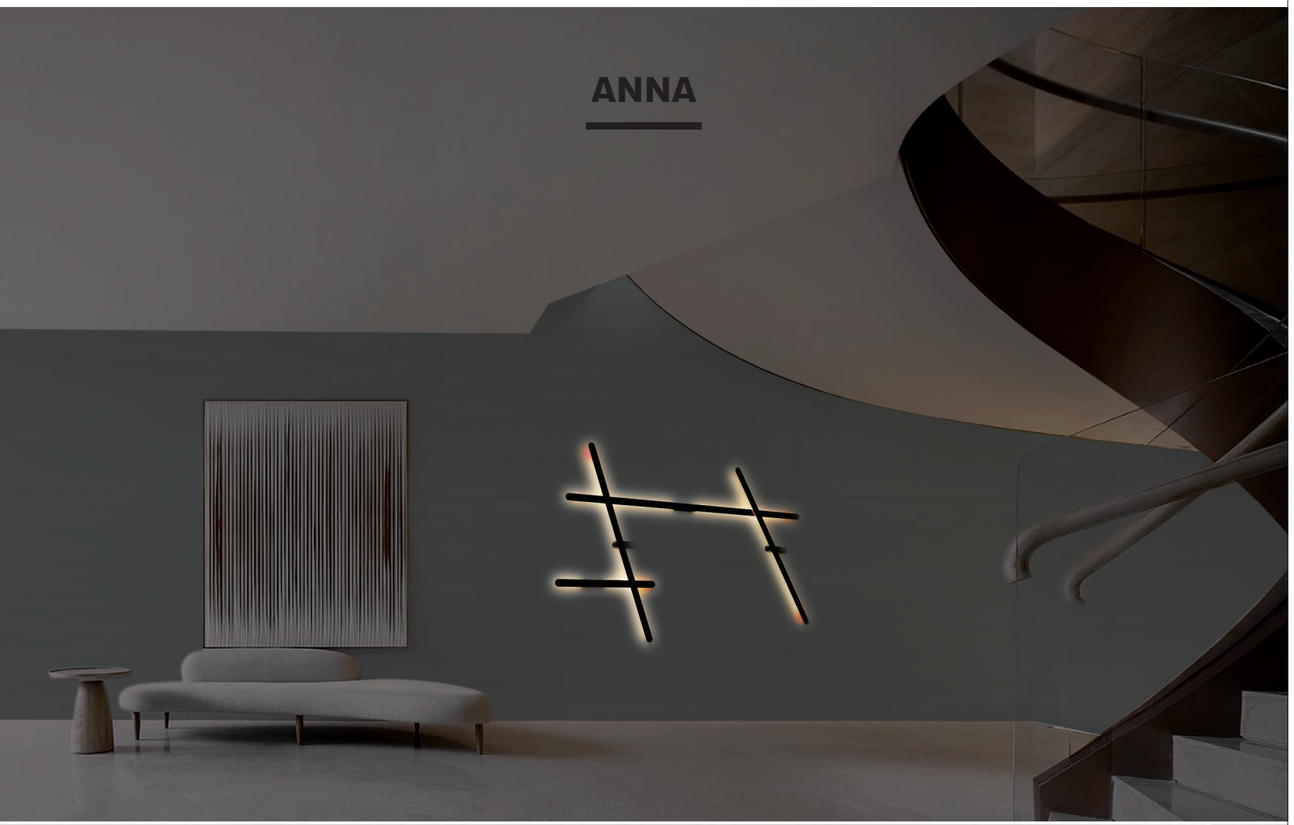



ANNA









WLB171/10W

LED: Bridgelux SMD
Power: 10W
CTN: 6
Material: Aluminum

WLB172/15W

LED: Bridgelux SMD
Power: 15W
CTN: 6
Material: Aluminum

WLB173/20W

LED: Bridgelux SMD
Power: 20W
CTN: 6
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP	CRI
20	90



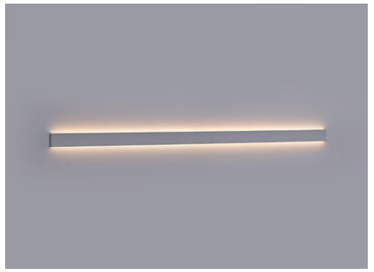



WLB146/10W–30

LED: Bridgelux SMD
Power: 10W
CTN: 20
Material: Aluminum



WLB146/20W–60

LED: Bridgelux SMD
Power: 20W
CTN: 12
Material: Aluminum



WLB146/30W–90

LED: Bridgelux SMD
Power: 30W
CTN: 9
Material: Aluminum



WLB146/40W–120

LED: Bridgelux SMD
Power: 40W
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP	CRI
20	90

SELINI



WLB174/5W



LED: Bridgelux SMD
Power: 5W
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black
Sand Black+Gold

IP	CRI
20	90

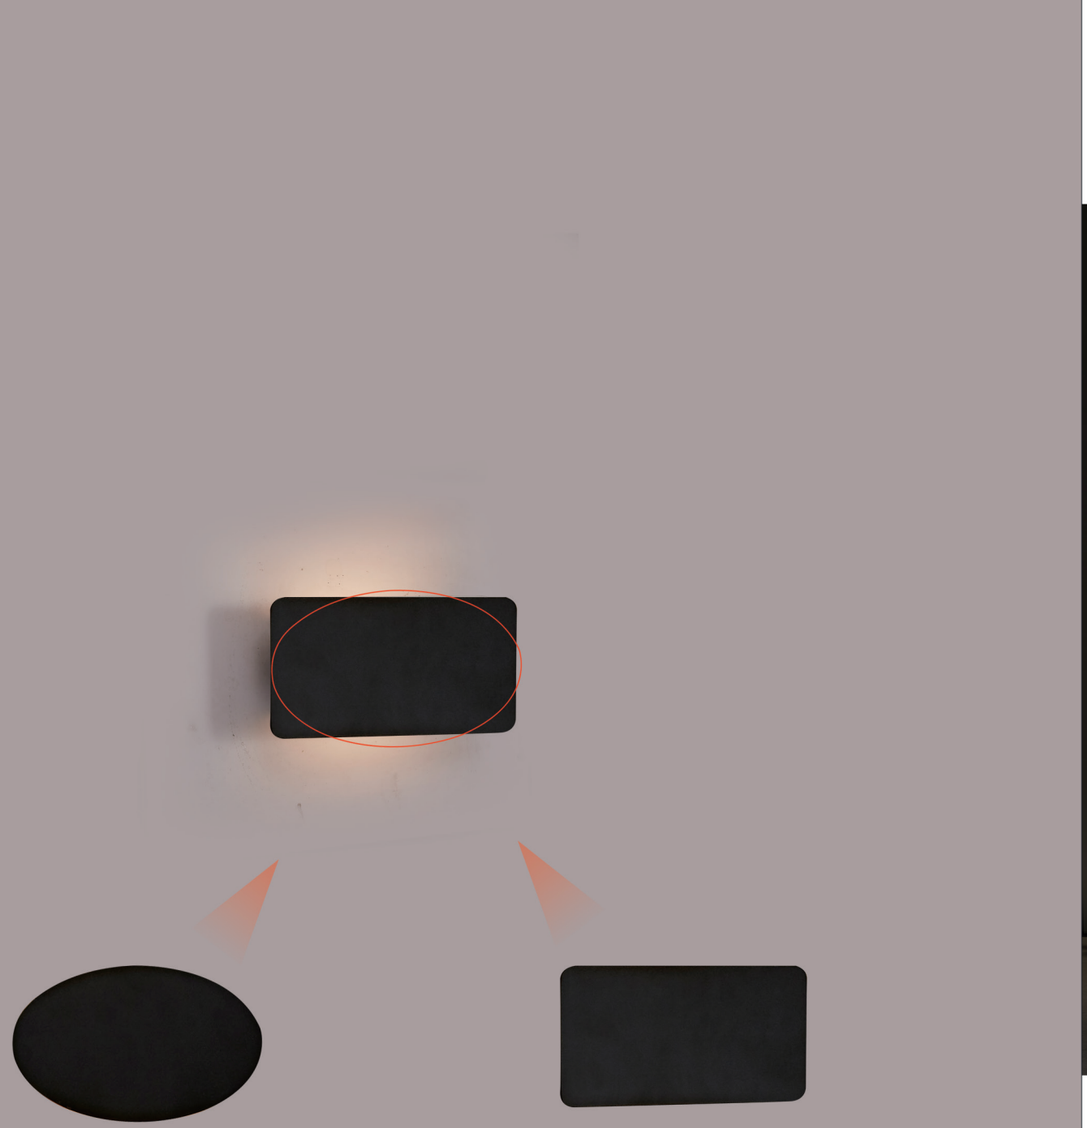

CLOUD







WLB111/6W

LED: Bridgelux SMD
Power: 6W
CTN: 12
Material: Aluminum

WLB112/6W

LED: Bridgelux SMD
Power: 6W
CTN: 12
Material: Aluminum





Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black+Gold
Sand White

IP	CRI
20	90



CLOUD





WLB103/5W

LED: Bridgelux SMD
Power: 5W
CTN: 20
Material: Aluminum

WLB104/10W

LED: Bridgelux SMD
Power: 10W
CTN: 20
Material: Aluminum



WLB105/15W

LED: Bridgelux SMD
Power: 15W
CTN: 12
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black
Sand White

IP	CRI
20	90



CLOUD





WLB196/8W

LED: LanTian AC COB
Power: 8W
CTN: 8
Material: Iron
IP: 20

Colortemperature

3000K

Color

Sand green grey + White
Sand Black+White

IP	CRI
20	90

CLOUD





WLB197/2 x 8W

LED: LanTian AC COB
Power: 2x8W
CTN: 8
Material: Iron
IP: 20

Colortemperature

3000K

Color

Sand green grey + White
Sand grain brown + sand black

IP	CRI
20	90

EVE

EVE



WLB082/5W

LED: Bridgelux SMD
Power: 5W
CTN: 12
Material: Aluminum

WLB099/7W

LED: Bridgelux SMD
Power: 7W
CTN: 12
Material: Aluminum



Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White

IP	CRI
20	90



TIME

TIME









WLB148/12W

LED: Bridgelux SMD
Power: 12W
CTN: 8
Material: Aluminum

WLB149/17W

LED: Bridgelux SMD
Power:17W
CTN: 6
Material: Aluminum

WLB150/23W

LED: Bridgelux SMD
Power: 23W
CTN: 6
Material: Aluminum

WLB153/1W

LED: OSRAM SMD
Power: 1W
CTN: 30
Material: Aluminum





Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

IP	CRI
20	90

MAIEN



MAIEN





WLB083–1/1 × 4W

LED: Lumens COB AC
Power: 1x4W
CTN: 50
Material: Aluminum

WLB083–2/2 × 4W

LED: Lumens COB AC
Power: 2x4W
CTN: 50
Material: Aluminum

Colortemperature

3000K

Color (WLB083-1/1×4W)

Sand White
Sand Black

Color (WLB083-2/2×4W)

Sand White+Gold
Sand White+Silver
Sand Black+Gold
Sand Black+Silver

IP	CRI	DIM
20	90	TRIAC









WLB093/2 x 4W

LED: Bridgelux COB
Power: 2x4W
Angle: 120°
CTN: 20
Material: Aluminum

WLB094/2 x 4W

LED: Bridgelux COB
Power: 2x4W
Angle: 120°+30°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Sand Black

IP	CRI
20	90

ANZA





WLB136/7W

LED: LatticePower SMD
Power: 7W
Angle: 24°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Green Grey+Black
Drown Sand Texture+Black

ON/OFF Short pression
DIM Long pression
IP 20
CRI 90



WLB138/7W

LED: LatticePower SMD
Power: 7W
Angle: 24°/35°
CTN: 20
Material: Aluminum





Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Green Grey+Black
Drown Sand Texture+Black

ON/OFF Short pression
DIM Long pression
IP 20
CRI 90



WLB137/7W

LED: LatticePower SMD
Power: 7W
Angle: 24°/35°
CTN: 20
Material: Aluminum







Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Black
Green Grey+Black
Drown Sand Texture+Black

ON/OFF Short pression
DIM Long pression
IP 20
CRI 90

JULIA

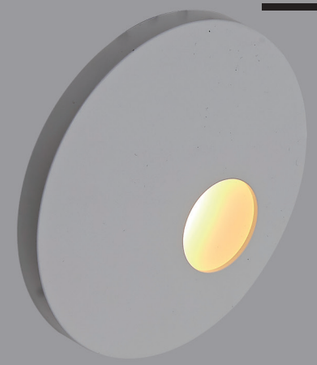

JULIA









55x55



55x55



55x55

WLB106/1W

LED: Bridgelux SMD
Power: 1W
CTN: 30
Material: Aluminum

Matt White

WLB107/1W

LED: Bridgelux SMD
Power: 1W
CTN: 30
Material: Aluminum

Matt White

WLB108/1W

LED: Bridgelux SMD
Power: 1W
CTN: 30
Material: Aluminum

Matt White

WLB106 Embedded parts

CTN: 30

Sand White+Black



Colortemperature

2700K 3000K 4000K 5000K

IP	CRI
20	90

JULIA

JULIA





WLB193/3W

LED: Bridgelux SMD
Power: 3W
CTN: 50
Material: Aluminum

Matt White
Coffee
Green grey

WLB193 Embedded

CTN: 50

Sand Black



Colortemperature

2700K 3000K 4000K 5000K

IP	CRI
20	90

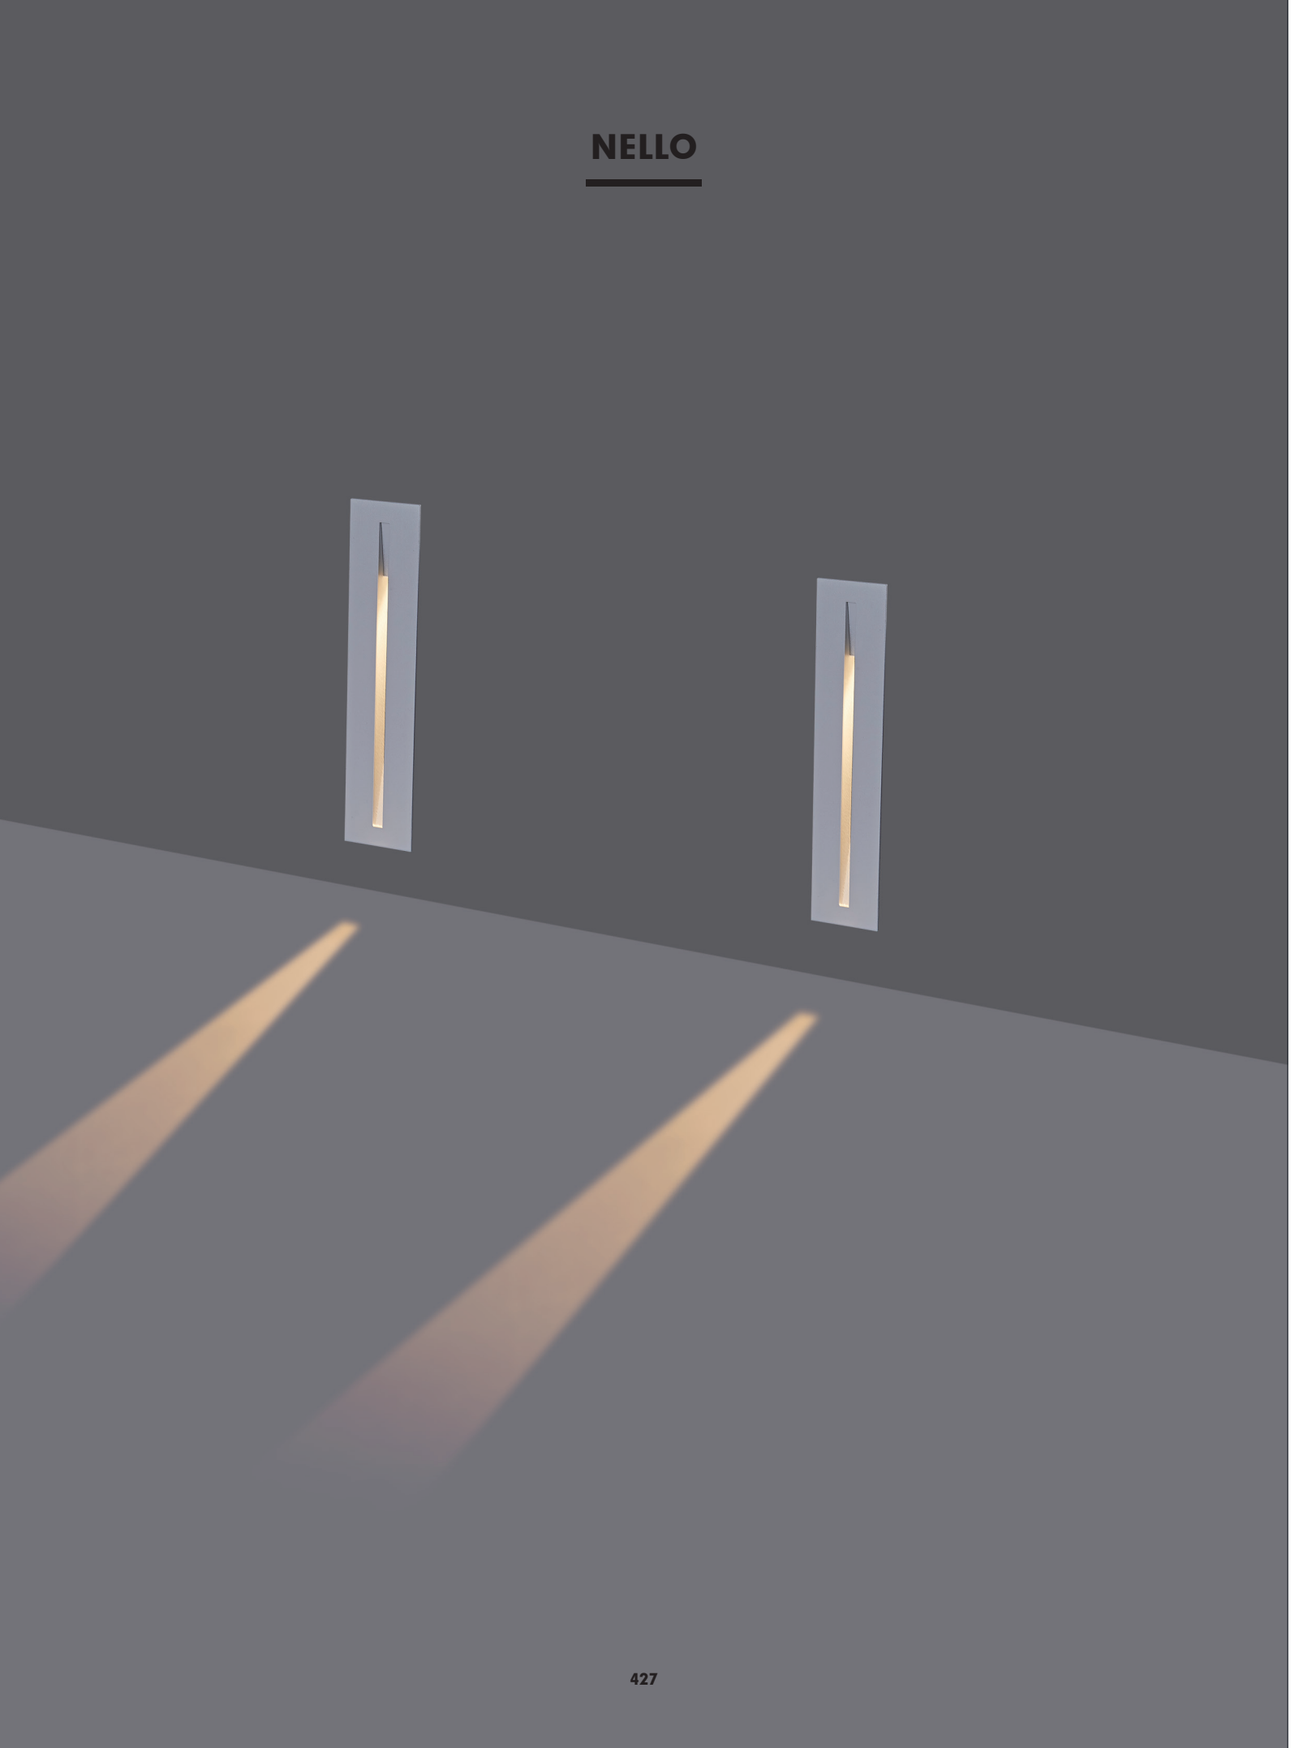

NELLO

NELLO



WLB131/3W

LED: OSRAM SMD
Power: 3W
CTN: 30
Material: Iron+Aluminum



WLB131 Embedded iron boxes

CTN: 30
Material: Iron

Sand Black







WLB132/3W

LED: OSRAM SMD
Power: 3W
CTN: 20
Material: Iron+Aluminum



WLB132 Embedded iron boxes

CTN: 20
Material: Iron

Sand Black







WLB133/3W

LED: OSRAM SMD
Power: 3W
CTN: 30
Material: Iron+Aluminum



WLB133 Embedded iron boxes

CTN: 30
Material: Iron

Sand Black





Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP	CRI
20	90

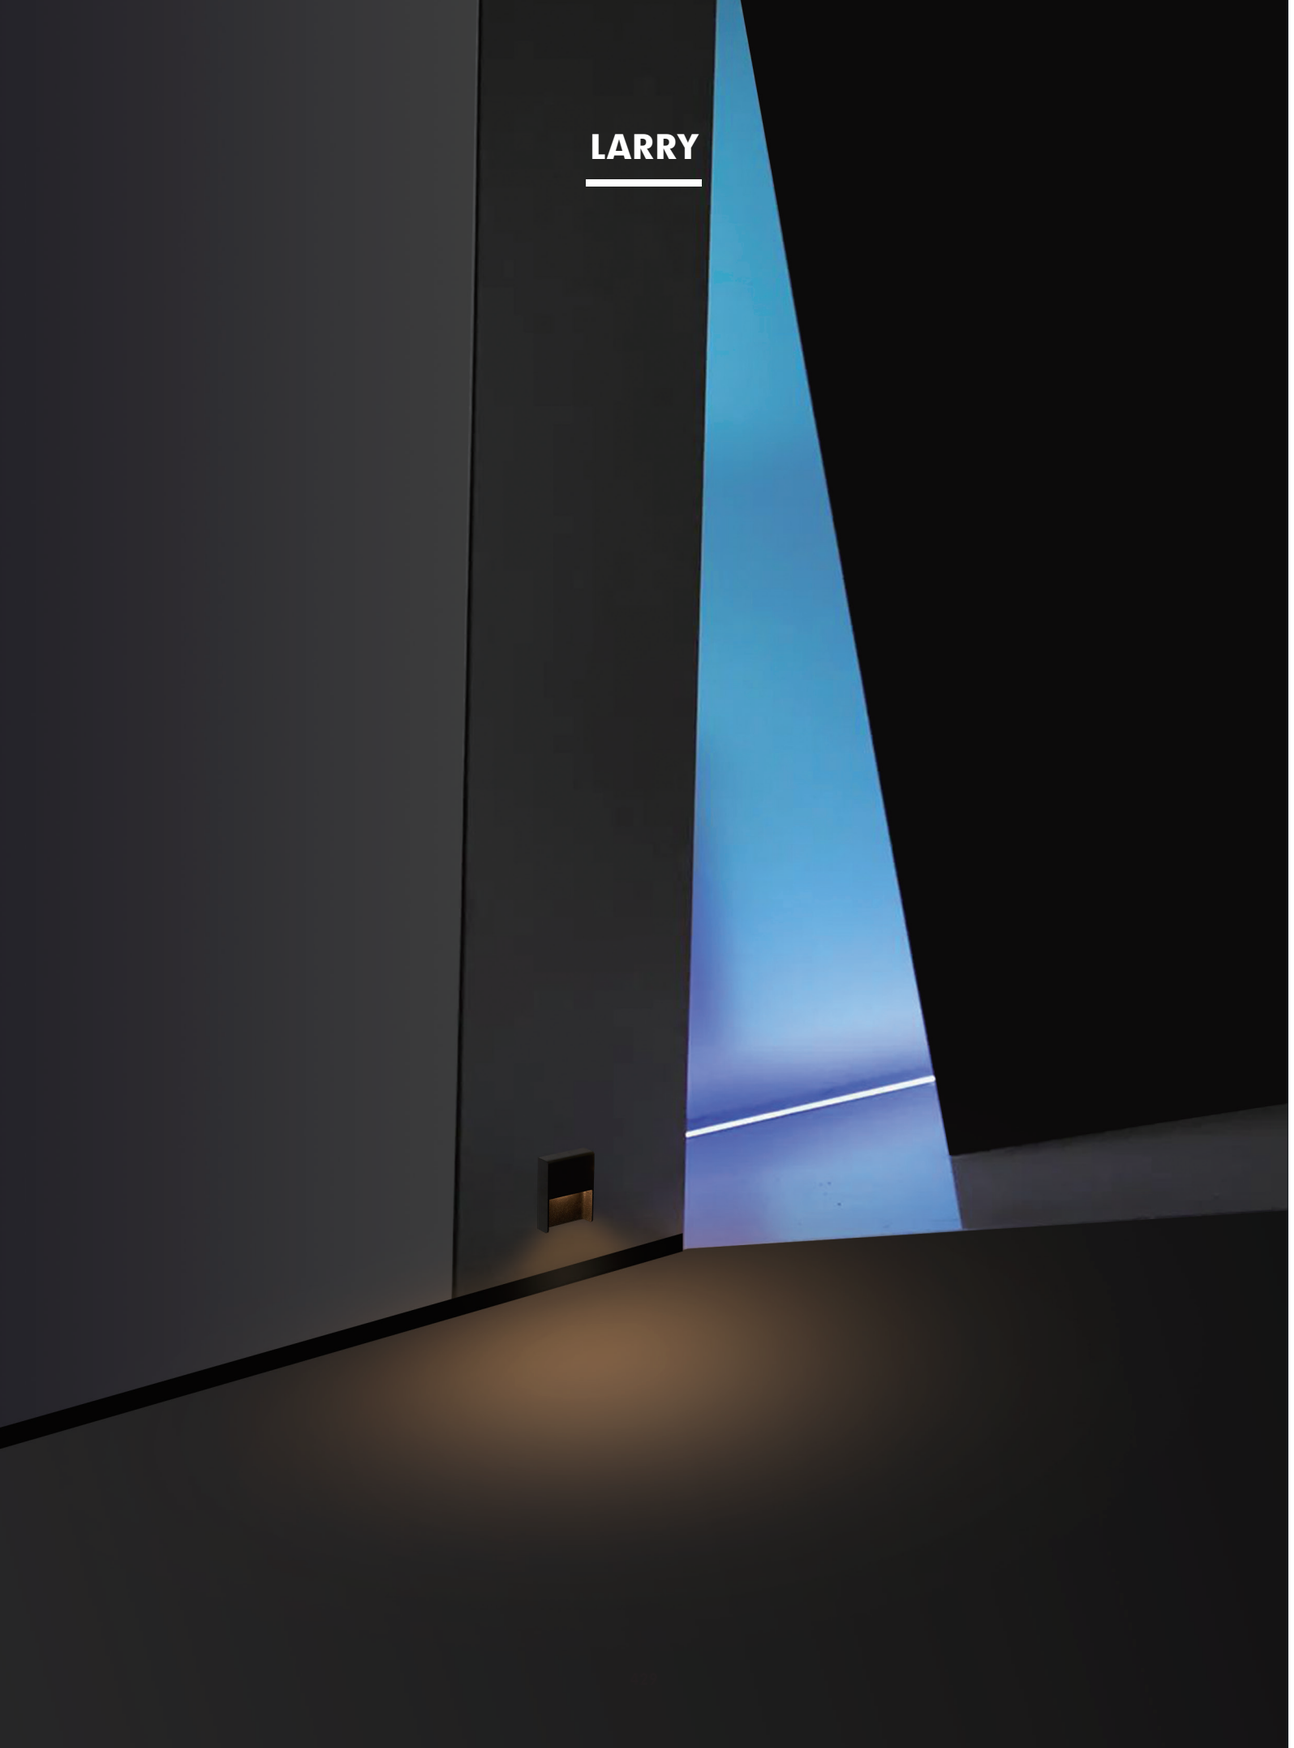

LARRY









WLB134/3W

LED: Bridgelux SMD
Power: 3W
CTN: 30
Material: Aluminum

WLB135/5W

LED: Bridgelux SMD
Power: 5W
CTN: 20
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP	CRI
44	90



CORSICA

CORSICA













WLB120/1W

LED: OSRAM SMD
Power: 1W
CTN: 50
Material: Aluminum

WLB121/1W

LED: OSRAM SMD
Power: 1W
CTN: 50
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 42

CRI 90

CORSICA



CORSICA











Ø50



Ø50



Ø50



Ø65



WLB126/1W

LED: OSRAM SMD
Power: 1W
CTN: 50
Material: Aluminum

WLB127/1W

LED: OSRAM SMD
Power: 1W
CTN: 50
Material: Aluminum

WLB128/1W

LED: OSRAM SMD
Power: 1W
CTN: 50
Material: Aluminum

WLB120 Embedded parts

Sand Black
CTN: 50

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP 42

CRI 90

CORSICA



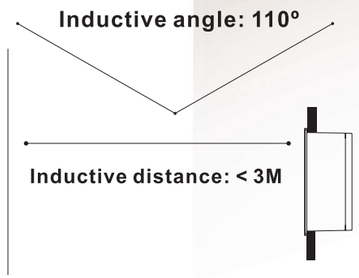

INDUCTIVE CONDITIONS:

Ambient light < 10 LUX

When the human body is within the induction range,
it will automatically turn on.
After leaving the induction area for 30 seconds (±10 seconds),
it will automatically turn off
(while walking within the induction area, it remains constantly illuminated).



3 LIGHTING EFFECT MODE SELECTION

1: Mode switching button

2: Long bright mode Press once, the light source flashes once

3: Infrared sensing mode Press once, the light source flashes twice

4: Infrared sensing+light sensing mode Press once, the light source flashes three times

CORSICA





4 TYPES OF FACE COVERS & 4 FORMS OF LIGHT SPOTS

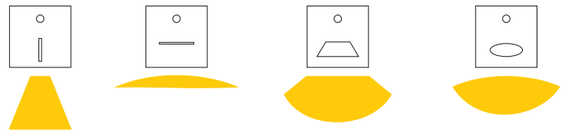

WLB194/3W

LED: Bridgelux SMD
Power: 3W
Material:
Iron+Aluminum+PC

WLB201/3W

LED: Bridgelux SMD
Power: 3W
Material:
Iron+Aluminum+PC

WLB202/3W

LED: Bridgelux SMD
Power: 3W
Material:
Iron+Aluminum+PC

WLB203/3W

LED: Bridgelux SMD
Power: 3W
Material:
Iron+Aluminum+PC

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White
Sand Black

IP	CRI
20	90

LED
TABLE LIGHT
SERIES

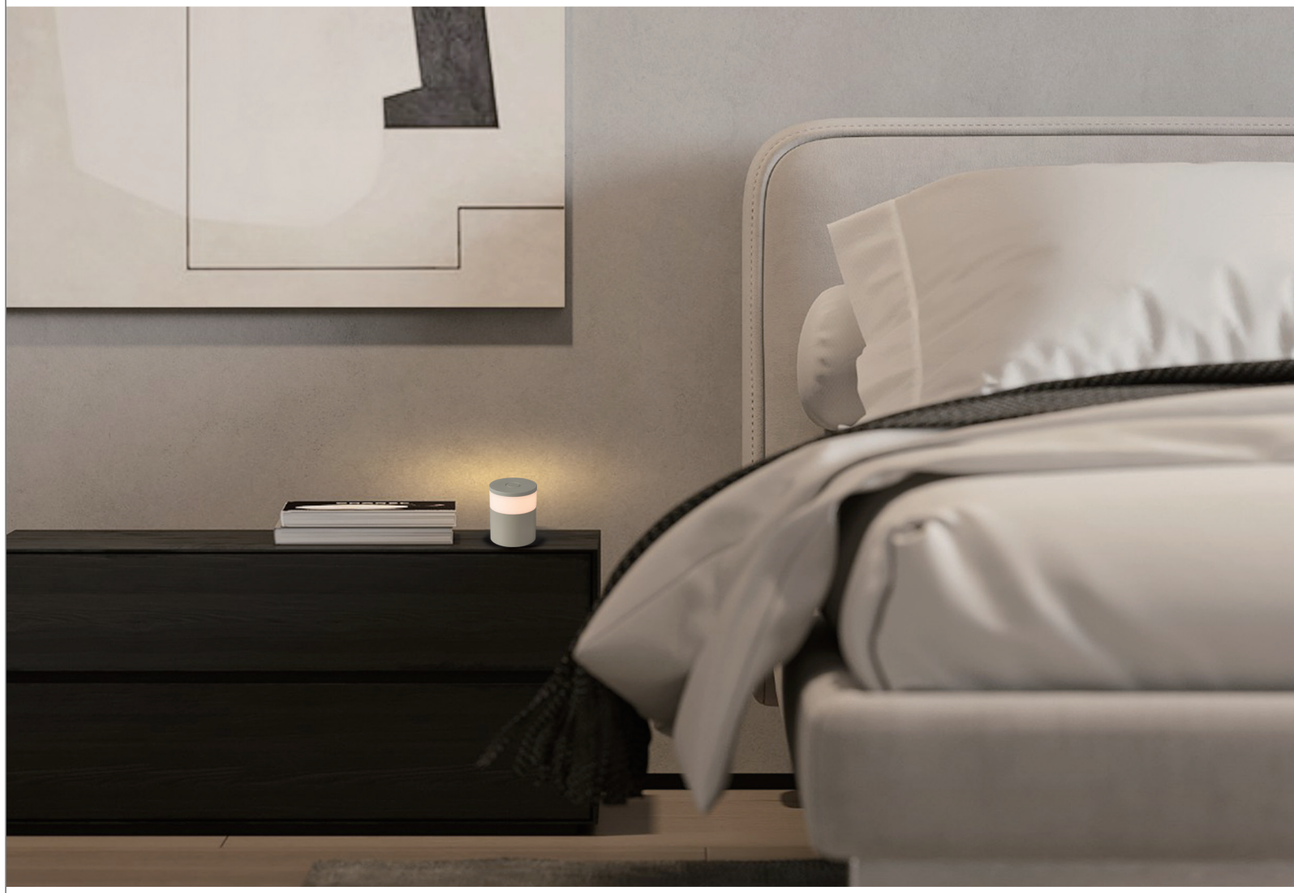

IVAN

IVAN





Short pression turns on/off,
long pression dims the light.



TD3001/3W

LED: Seoul SMD
Power: 3W
CTN: 12
Material: Aluminum+Glass



TD3001CH

CTN: 12
Material: Aluminum+Glass

Wireless Charging



Colortemperature

3000K

Color （TD3001/3W）

Matt Black+White

Color （TD3001CH）

Matt Black

ON/OFF
Short pression

DIM
Long pression

IP 54

CRI 95

IVAN

IVAN





TD3017/3W

LED: Seoul SMD
Power: 3W
CTN: 8
Material: Aluminum+Glass

Colortemperature

3000K 4000K 5000K

Color

Matt black+white

ON/OFF Short pression
DIM Long pression
IP 54
CRI 95

IVAN

IVAN





TD3016/1W

LED: SMD
Power: 1W
CTN: 20
Material: Iron+Glass

Colortemperature

3000K 6000K

Color

Sand black+Amber
Sand black+smoke grey

ON/OFF Short pression
DIM Long pression
IP 54
CRI 95

IVAN

IVAN



Short pression turns on/off,
long pression dims the light.

IVAN





TD3003/0.5W

LED: Bridgelux SMD
Power: 0.5W
CTN: 20
Material: Iron+PC



Colortemperature

2700K+5000K

Color

Matt Black
Brownk
Green grey

ON/OFF Short pression | DIM Long pression | IP 20 | CRI 90

IVAN



TD3004/0.5W

LED: Bridgelux SMD
Power: 0.5W
CTN: 20
Material: Aluminum+PC



Short pression turns on/off,
long pression dims the light.

Colortemperature

2200K+2700K

Color

Matt Black
Brownk
Green grey

ON/OFF Short pression | DIM Long pression | IP 20 | CRI 90

SETTING SUN

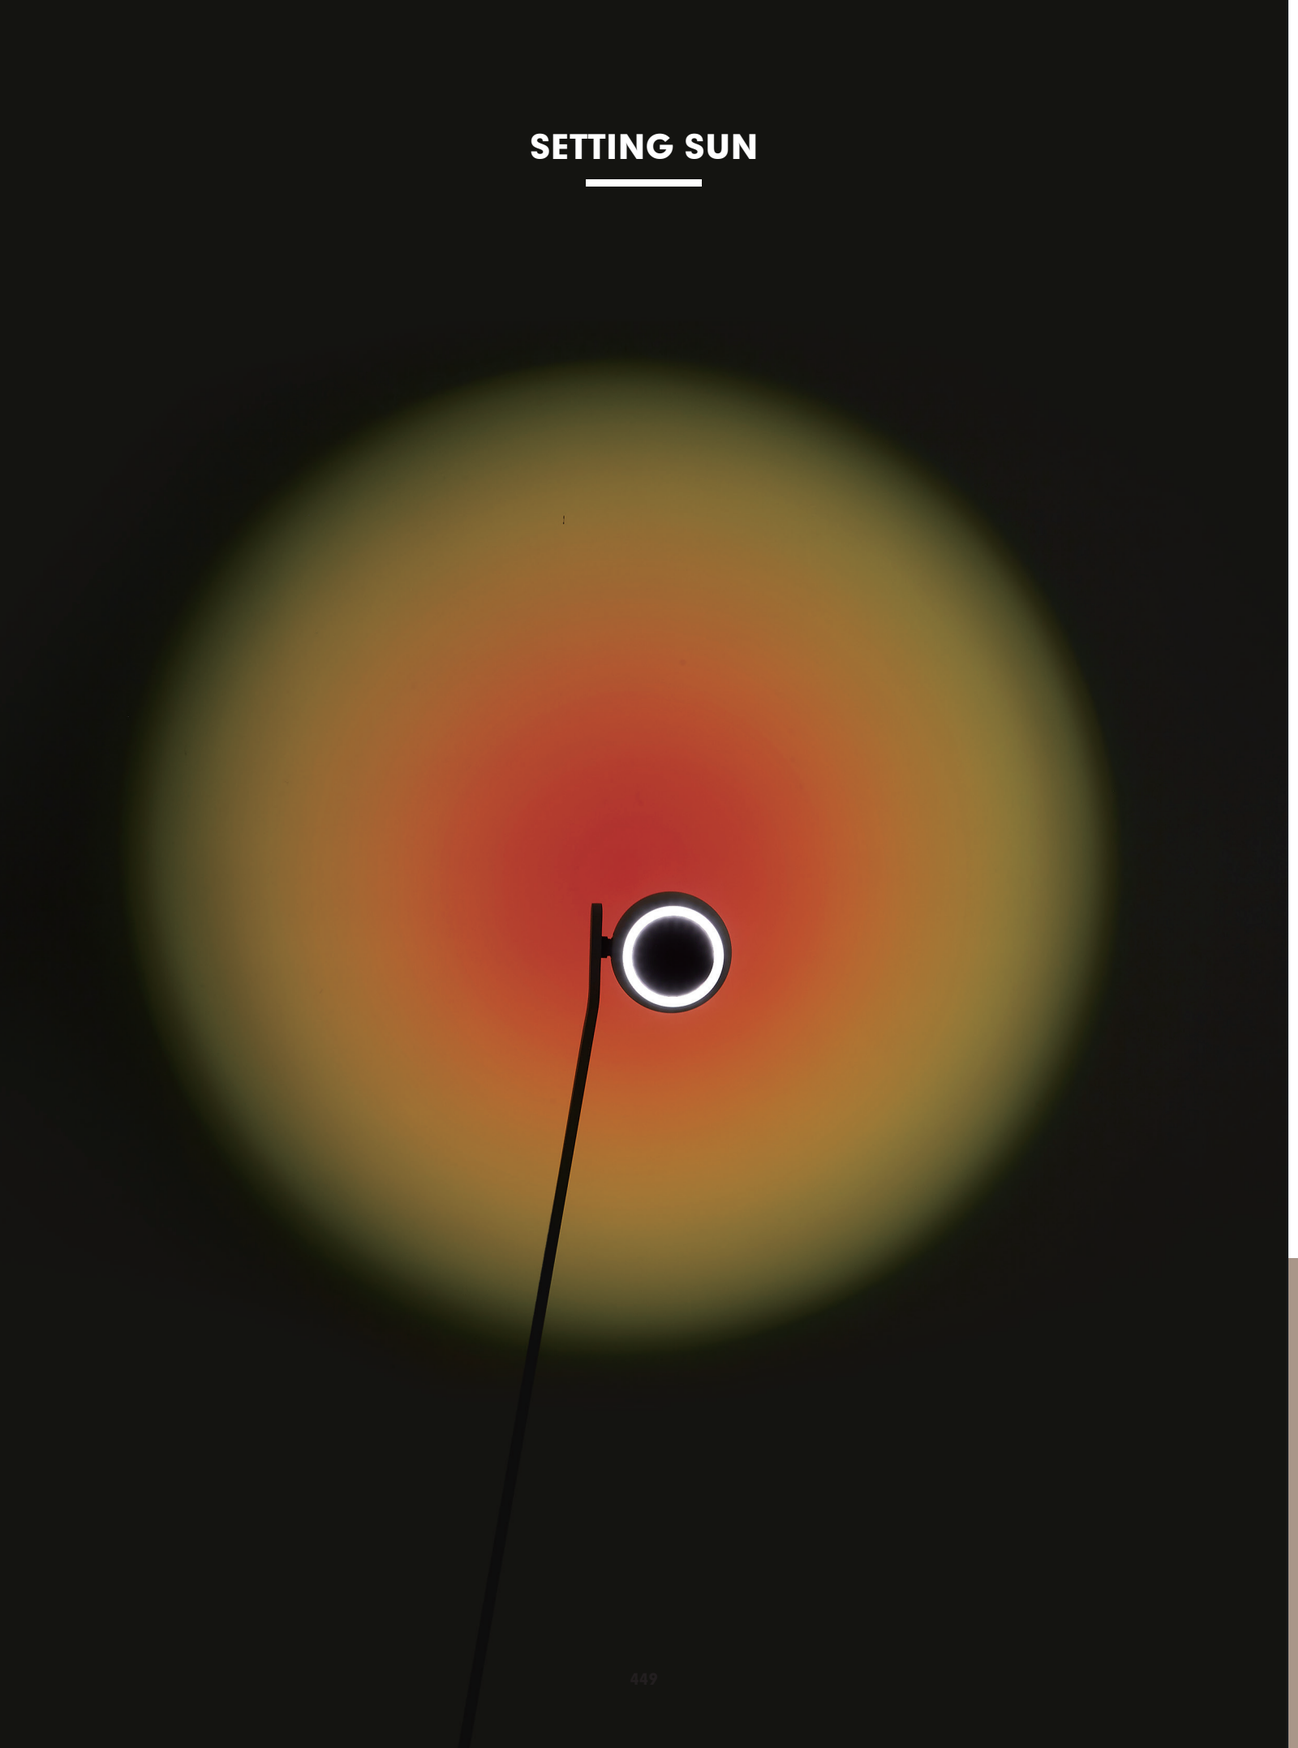

SETTING SUN

REMOVE

LOCAL FEATURES



DIMMING



450

COLOUR MIXING



SETTING SUN

SETTING SUN



TD3007/4W+1W

LED: Bridgelux COB+SMD
Power: 4W+1W
CTN: 1
Material: Aluminum



Colortemperature

3000K+Color Fiter

Color

Rose Gold
Shiny Chrome

ON/OFF Short pression | DIM Long pression | IP 20 | CRI 90



TD3014/4W+1W

LED: Bridgelux COB+SMD
Power: 4W+1W
CTN: 1
Material: Aluminum



Colortemperature

2700K | 3000K | 4000K | 5000K

Color

Rose Gold
Shiny Chrome

ON/OFF Short pression | DIM Long pression | IP 20 | CRI 90



SETTING SUN





LL8118/4W+1W

LED: Bridgelux COB+SMD
Power: 4W+1W
CTN: 1
Material: Aluminum+Iron

Colortemperature

3000K+Color Fiter

Color

Sand White+Rose Gold
Sand White+Shiny Chrome

ON/OFF Short pression | DIM Long pression | IP 20 | CRI 90





LL8132/4W+1W

LED: Bridgelux COB+SMD
Power: 4W+1W
CTN: 1
Material: Aluminum+Iron

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand White+Rose Gold
Sand White+Shiny Chrome

ON/OFF Short pression | DIM Long pression | IP 20 | CRI 90



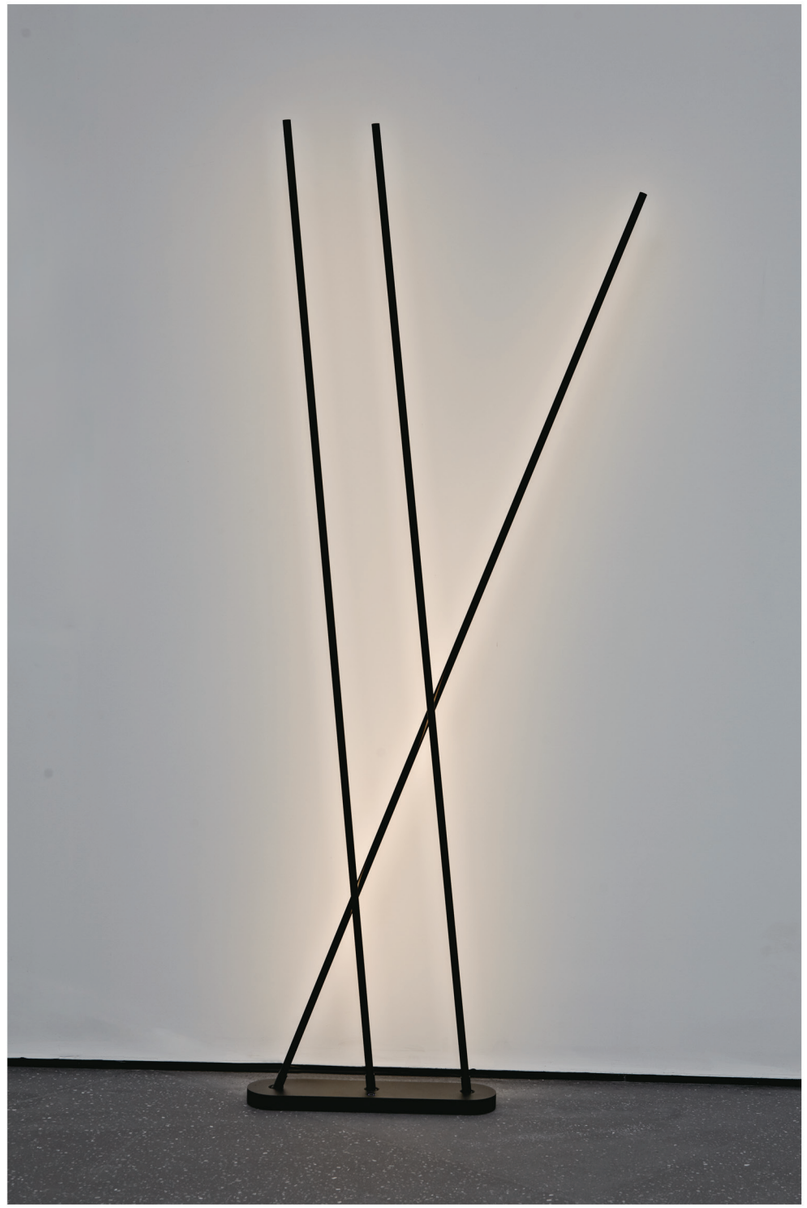

SIGNAL



SIGNAL





LL8125/10W

LED: SMD
Power: 10W
Angle: 120°
CTN: 1
Material: Aluminum





LL8126/3x10W

LED: SMD
Power: 3x10W
Angle: 120°
CTN: 1
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color

Sand Black

ON/OFF Short pression | DIM Long pression | IP 20 | CRI 90

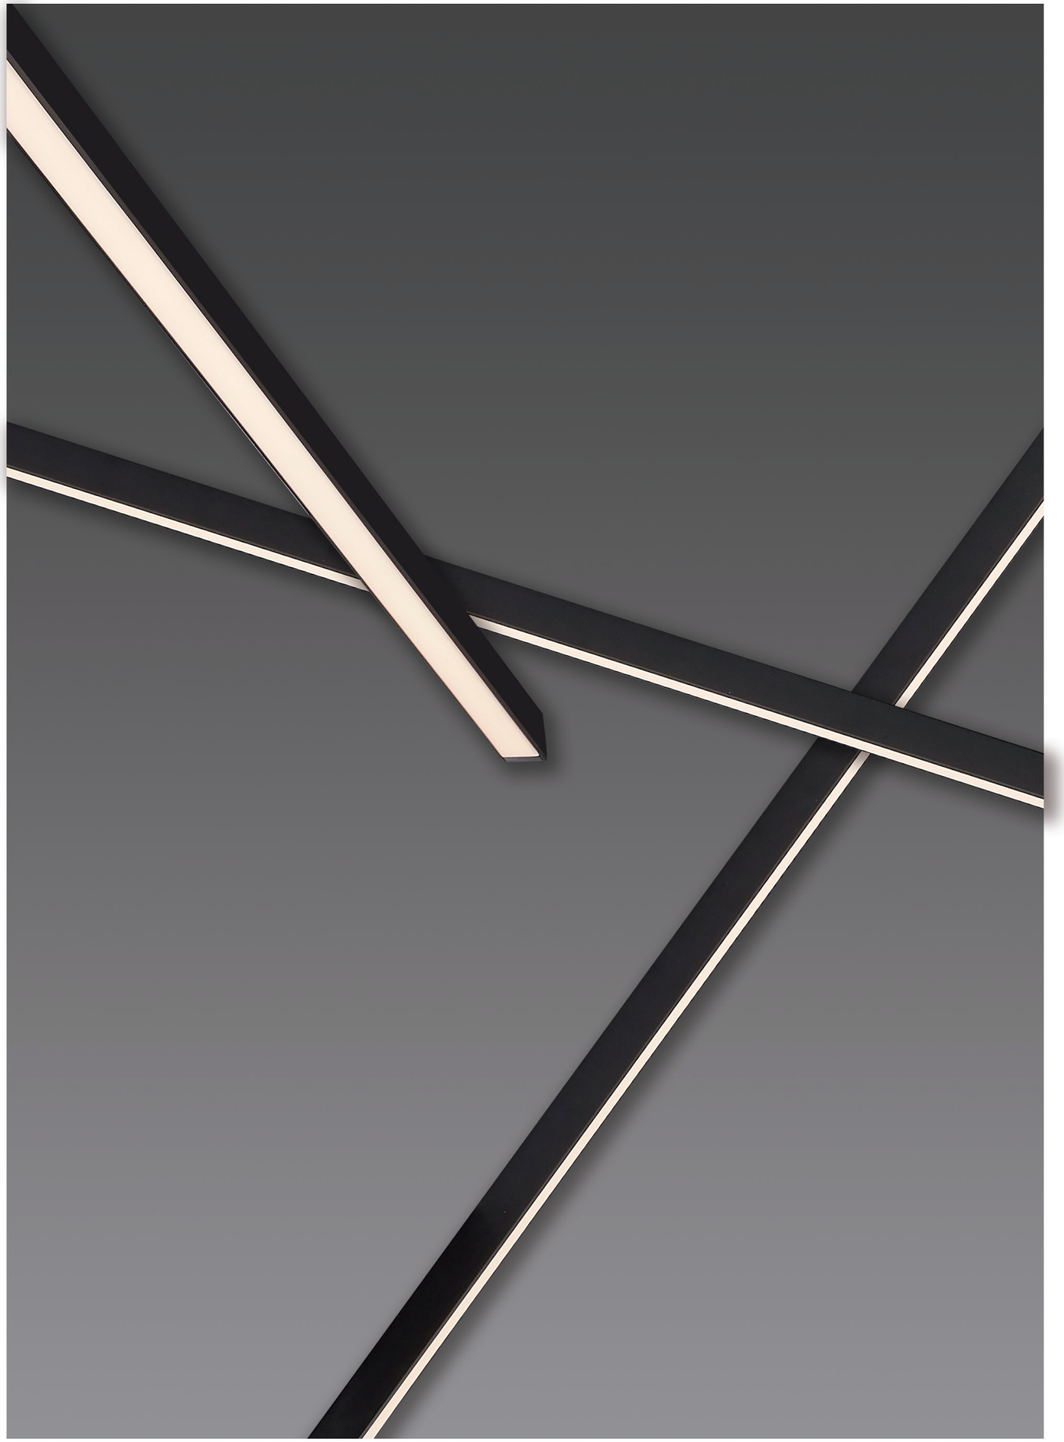

GRADA



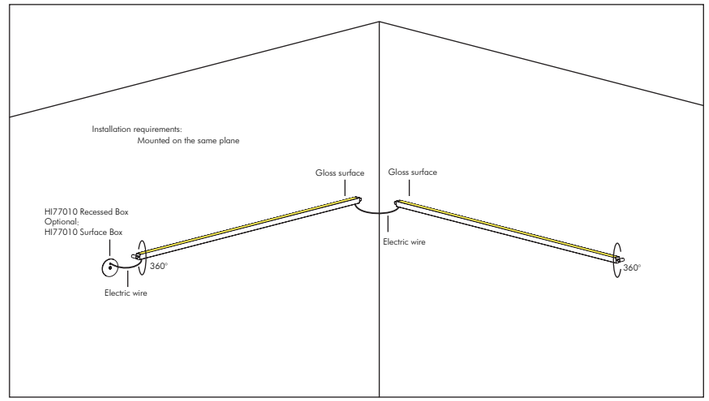





WLB156/30W

LED: SMD
Power: 30W
Angle: 110°
CTN: 6
Material: Aluminum

WLB157/40W

LED: SMD
Power: 40W
Angle: 110°
CTN: 6
Material: Aluminum

Colortemperature

3000K 4000K

Color

Sand Black

IP 20 | CRI 90 | DC48V



GRADA

GRADA

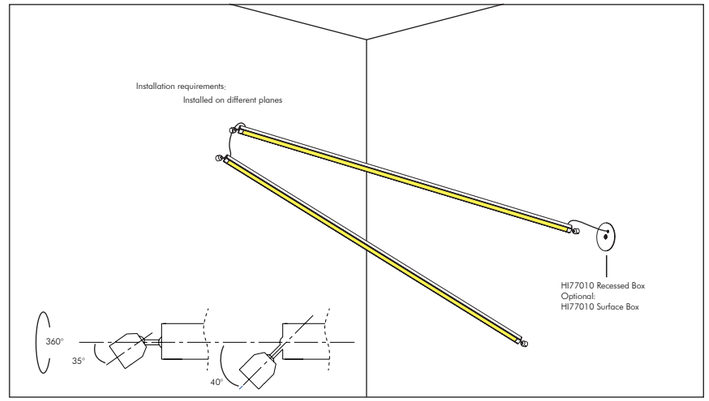





WLB159/30W

LED: SMD
Power: 30W
Angle: 110°
CTN: 6
Material: Aluminum

WLB160/40W

LED: SMD
Power: 40W
Angle: 110°
CTN: 6
Material: Aluminum

Colortemperature

3000K 4000K

Color

Sand Black

IP	CRI	
20	90	DC48V



GRADA

GRADA

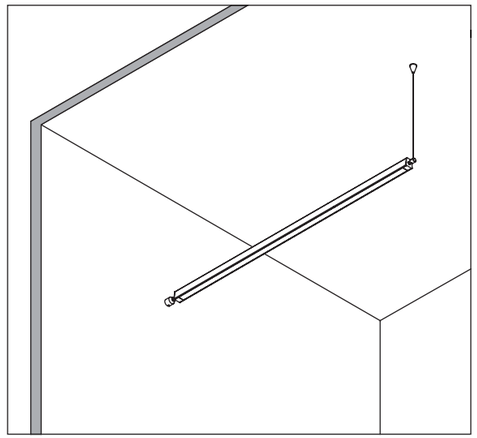



HL77001/30W

LED: SMD
Power: 30W
Angle: 110°
CTN: 6
Material: Aluminum



HL77002/40W

LED: SMD
Power: 40W
Angle: 110°
CTN: 6
Material: Aluminum

Colortemperature

3000K 4000K

Color

Sand Black

IP 20 | CRI 90 | DC48V

GRADA







HL77004/30W

LED: SMD
Power: 30W
Angle: 110°
CTN: 6
Material: Aluminum

HL77005/40W

LED: SMD
Power: 40W
Angle: 110°
CTN: 6
Material: Aluminum

Colortemperature

3000K 4000K

Color

Sand Black

IP 20 | CRI 90 | DC48V

GRADA









HL77010 Recessed Box

CTN: 12
Material: Aluminum

Sand Black

HL77010 Surface Box

Power: 150W
CTN: 12
Material: Iron
IP: 20

Sand Black



GRADA

GRADA

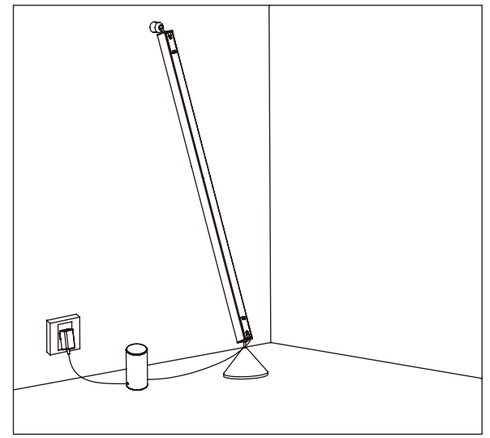



LL8113/30W

LED: SMD
Power: 30W
Angle: 110°
CTN: 6
Material: Aluminum



LL8114/40W

LED: SMD
Power: 40W
Angle: 110°
CTN: 6
Material: Aluminum



LL8113 Power Box

LED: SMD
Power: 150W
CTN: 30
Material: Iron
IP: 20

Colortemperature

3000K 4000K

Color

Sand Black

IP 20 | CRI 90 | DC48V

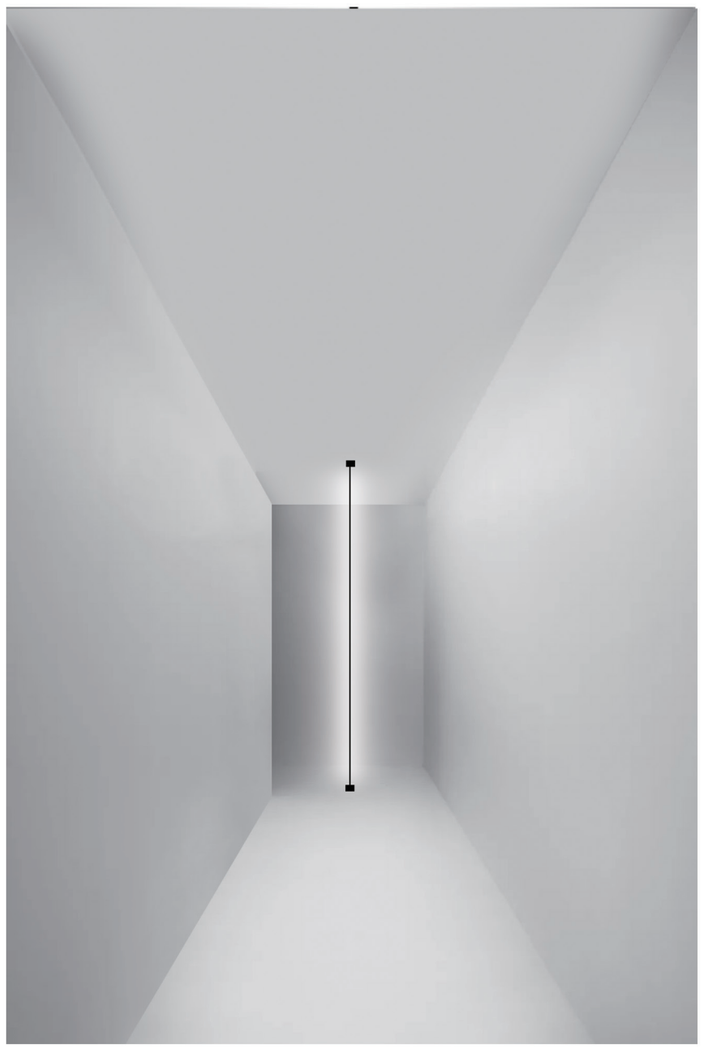

SKYLINE

SKYLINE

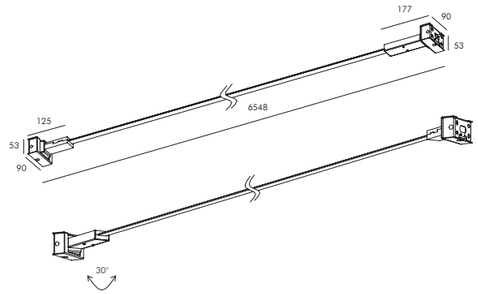

LL8103–6/66W

LED: Strip COB
Power: 66W
Flux(Lm): 770Lm/M
Length: 6M
Input: DC24V
CTN: 1
Material: Stainless steel+Iron

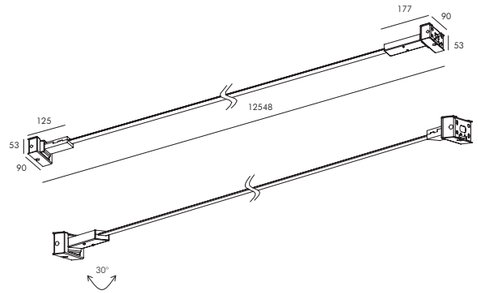

LL8104–12/132W

LED: Strip COB
Power: 132W
Flux(Lm): 770Lm/M
Length: 12M
Input: DC24V
CTN: 1
Material: Stainless steel+Iron



LL8105–4/44W

LED: Strip COB
Power: 44W
Flux(Lm): 770Lm/M
Length: 4M
Input: DC24V
CTN: 1
Material: Stainless steel+Iron

Colortemperature

3000K 4000K

Color

Sand Black

IP	CRI
20	90

SKYLINE

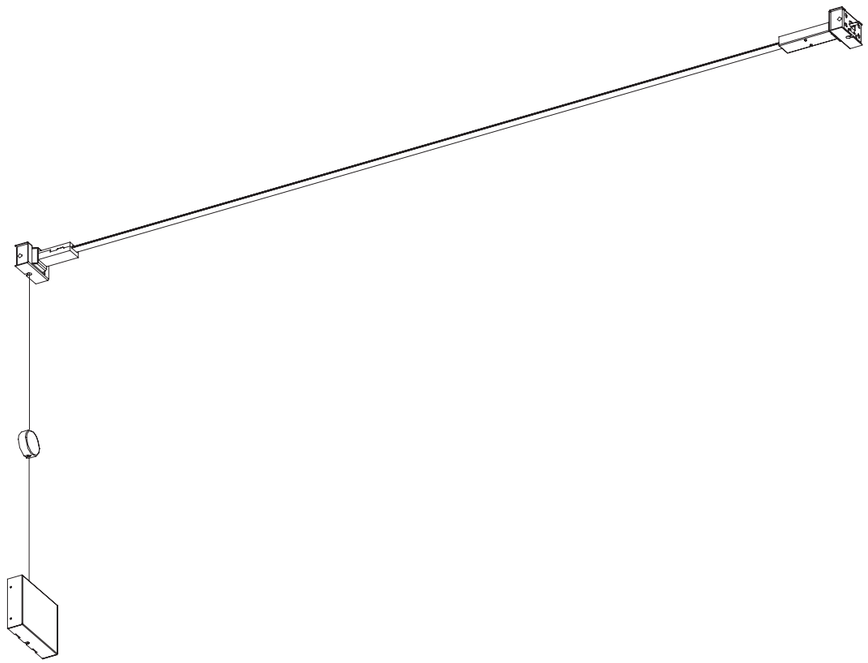



LL8103 Cable holder

CTN: 50
Material: Iron
Sand Black



LL8103 Power box

Output: 75W DC24V
CTN: 20
Material: Iron
Sand Black



LL8104 Power box

Output: 150W DC24V
CTN: 8
Material: Iron
Sand Black

LED STRIP
LIGHT
SERIES



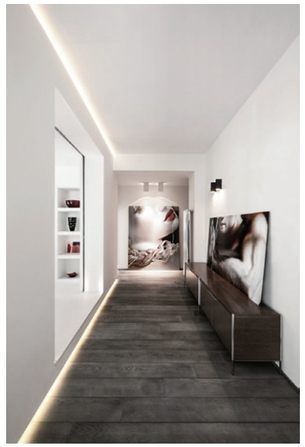

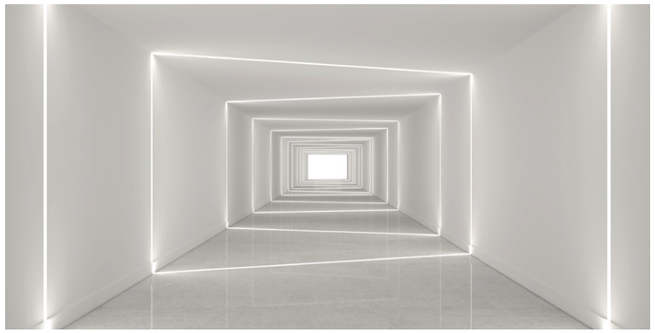

STRIP

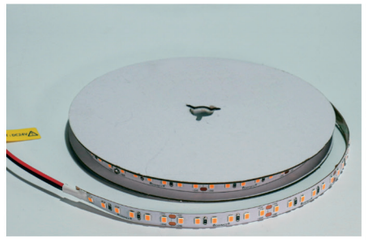

RN24-001L/9.6W

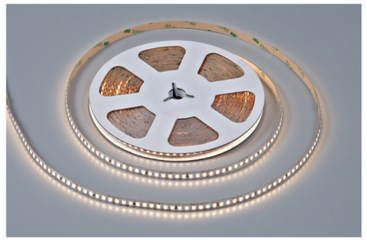

RN24-2835R180DRa90-IP20



RN24-2835SRa9014W/IP20

Model	Power/M	Voltage	CCT	CRI	LED	PCB Wide	LED/M	X LED (mm) GroupS	Length	IP
RN24-001L/9.6W	9.6W	DC24V	3000K 4000K 6000K	Ra90	2835	8mm	120pcs	6pcs	10M	20

Model	Power/M	Voltage	CCT	CRI	LED	PCB Wide	LED/M	X LED (mm) GroupS	Length	IP
RN24-2835R180DRa90-IP20	14W	DC24V	3000K 4000K 6000K	Ra90	2835	8mm	180pcs	6pcs	10M	20

Model	Power/M	Voltage	CCT	CRI	LED	PCB Wide	LED/M	X LED (mm) GroupS	Length	IP
RN24-2835SRa9014W/IP20	14.4W	DC24V	3000K + 6000K	Ra90	2835	8mm	120pcs	6pcs	10M	20

STRIP

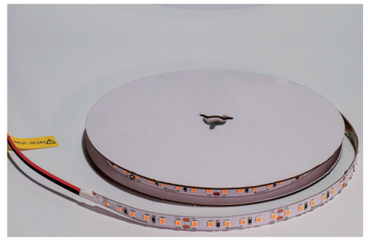

RN24-002L/9.6W

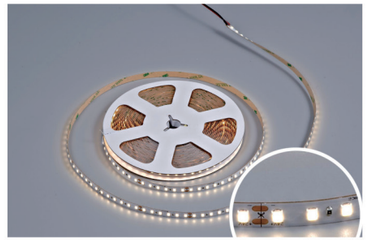

RN24-2835R120DRa90/IP20-C

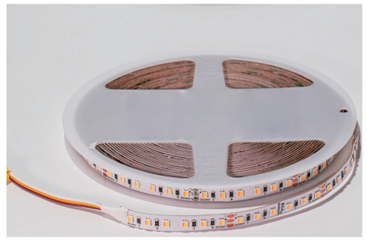

RN24-003L/14.4W

Model	Power/M	Voltage	CCT	CRI	LED	PCB Wide	LED/M	X LED (mm) GroupS	Length	IP
RN24-002L/9.6W	9.6W	DC24V	3000K 4000K 6000K	Ra90	2835	8mm	120pcs	6pcs	10M	20

Model	Power/M	Voltage	CCT	CRI	LED	PCB Wide	LED/M	X LED (mm) GroupS	Length	IP
RN24-2835R120DRa90/IP20-C	9.6W	DC24V	3000K 4000K 6000K	Ra90	2835	8mm	120pcs	6pcs	10M	20

Model	Power/M	Voltage	CCT	CRI	LED	PCB Wide	LED/M	X LED (mm) GroupS	Length	IP
RN24-003L/14.4W	14.4W	DC24V	3000K + 6000K	Ra90	2835	8mm	120pcs	6pcs	10M	20

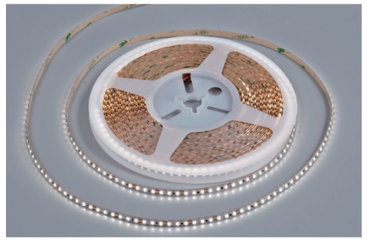

RN24-2216R180D-5MM

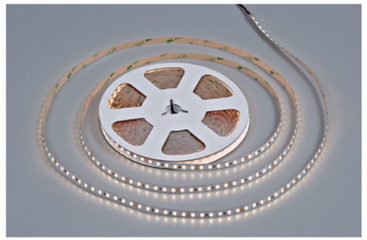

RN24V-2835R120D-IP20



RN24-004L/15W

Model	Power/M	Voltage	CCT	CRI	LED	PCB Wide	LED/M	X LED (mm) GroupS	Length	IP
RN24-2216R180D-5MM	9.6W	DC24V	3000K 4000K 6000K	Ra90	2216	5mm	180pcs	3pcs	10M	20

Model	Power/M	Voltage	CCT	CRI	LED	PCB Wide	LED/M	X LED (mm) GroupS	Length	IP
RN24-2835R120DRa90/IP20	9.6W	DC24V	3000K 4000K 6000K	Ra90	2835	8mm	120pcs	1pcs	10M	20

Model	Power/M	Voltage	CCT	CRI	LED	PCB Wide	LED/M	X LED (mm) GroupS	Length	IP
RN24-004L/15W	15W	DC24V	RGBW	W:Ra90	5050	12mm	60pcs	6pcs	5M	20

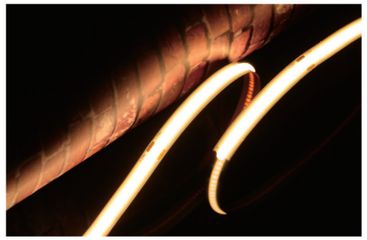

RN24-COBRa9010W/IP20

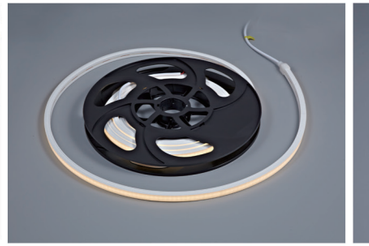

RN24-005N/10W



RN24-006N/10W

Model	Power/M	Voltage	CCT	CRI	LED	PCB Wide	LED/M	X LED (mm) GroupS	Length	IP
RN24-COBRa9010W/IP20	10W	DC24V	3000K 4000K 6000K	Ra90	COB	8mm	384pcs	31mm	10M	20

Model	Power/M	Voltage	CCT	CRI	LED	SIZE	LED/M	X LED (mm) GroupS	Length	IP
RN24-005N/10W	10W	DC24V	3000K 4000K 6000K	Ra90	2835	12×12mm	120pcs	6pcs	5M	65

Model	Power/M	Voltage	CCT	CRI	LED	SIZE	LED/M	X LED (mm) GroupS	Length	IP
RN24-006N/10W	10W	DC24V	3000K 4000K 6000K	Ra90	2835	12×12mm	120pcs	6pcs	5M	65

LED LINEAR
LIGHT
SERIES























MLL5213A

CTN: 30
Material: Aluminum

Silvery

MLL5213B

CTN: 30
Material: Aluminum

Silvery

MLL3213

CTN: 40
Material: Aluminum

Silvery

MLL4525

CTN: 30
Material: Aluminum

Silvery

MLL5022

CTN: 30
Material: Aluminum

Silvery





















MLL5614

CTN: 30
Material: Aluminum

Silvery

MLL6114A

CTN: 25
Material: Aluminum

Silvery

MLL6114B

CTN: 25
Material: Aluminum

Silvery

MLL1010

CTN: 50
Material: Aluminum

Silvery

MLL1710R

CTN: 50
Material: Aluminum

Silvery





















MLL1213

CTN: 100
Material: Aluminum

Silvery

MLL2212R

CTN: 100
Material: Aluminum

Silvery

MLL1715

CTN: 50
Material: Aluminum

Silvery

MLL2415R

CTN: 50
Material: Aluminum

Silvery

MLL3636

CTN: 40
Material: Aluminum

Silvery





MLL1765

CTN: 25
Material: Aluminum

Matt Black
Gold



LINE

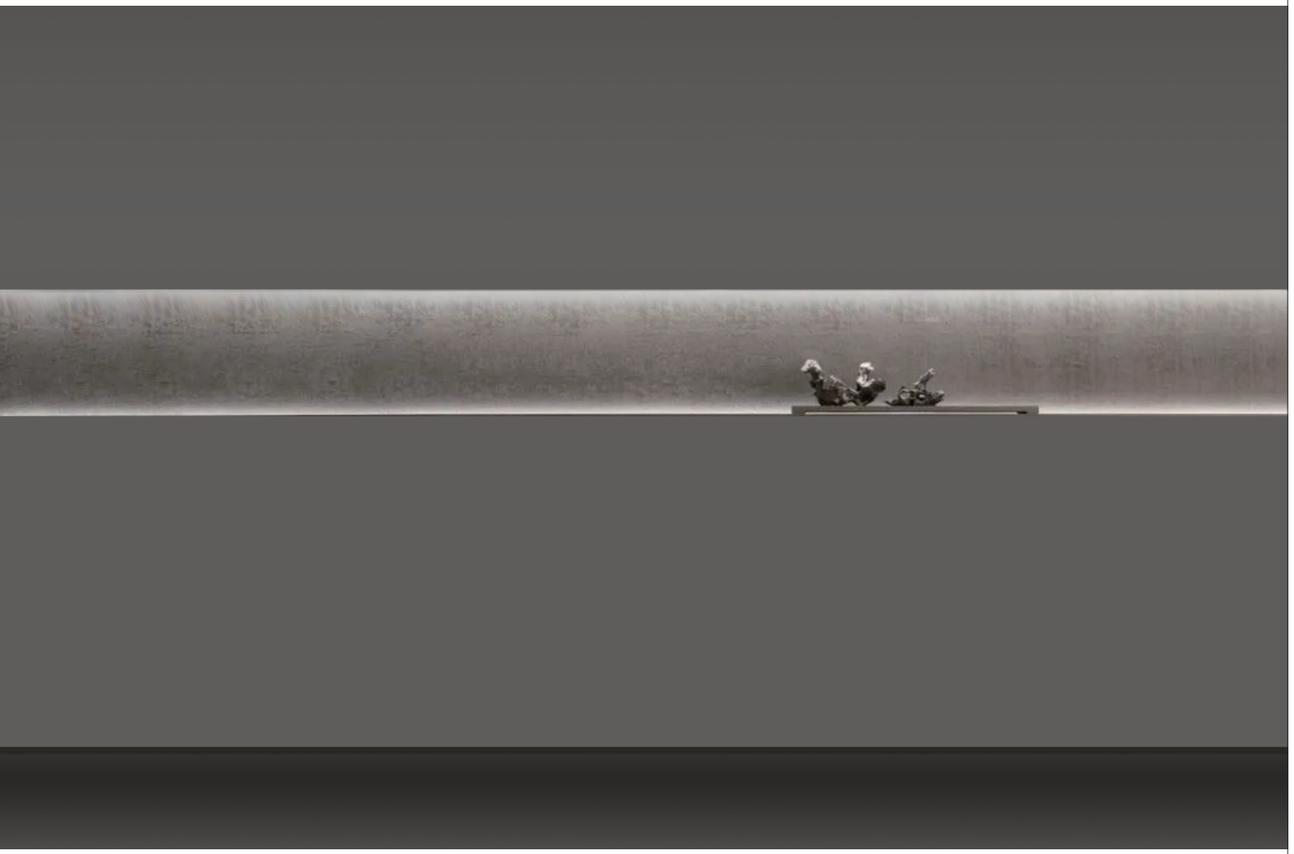





MLL8657R

CTN: 5
Material: Aluminum

Sand White



01



02



03





MLL9434R

CTN: 6
Material: Aluminum

Sand White



01



02



03





MLL4051R

CTN: 20
Material: Aluminum

Sand White



01



02



03



OR





MLL10069R

CTN: 8
Material: Aluminum

Sand White



01



02



03



OR





MLL3596R

CTN: 8
Material: Aluminum

Sand White



01



02



03



OR

RAYNICE®

Lighting