

RAYNICE®

TRACK SYSTEM

TRACK SYSTEM

RAYNICE®

RAYNICE®

JIANGMEN RAYNICE LIGHTING CO.,LTD

FACTORY

NO.11 MingHui Road,High-tech industrial zones,JiangMen City,GuangDong Province,China

Tel: (+86) 0750-8522688 Fax: (+86) 0750-8529704

SHOWROOM

B01-05, 10th Floor, Star Alliance, Guzhen Town, Zhongshan City

E-mail:raynice@raynice.com

Http://www.raynice.com

RAYNICE LIGHTING 2025 II


COMPANY INTRODUCTION

Raynice Lighting, is positioning the leading, unique, high-grade products as the brand of "delicately exuding the charm" . The company was established in 2005, which located in the west of China Lighting Capital-Jiangmen high-tech zone, with 30000 square meters of industrial park, focusing on lighting researching and manufacturing the Lighting appliances, and constantly introducing the world advanced production equipment and perfect management system, adopting the synchronous international standard-quality to manage. By researching and importing the last trend of development core technology and product design, it energetically develops the LED technology and the energy saving

environment products, which has been leading the trend of the lighting markets and product developments. The company has guide into a ERP management system to standard the whole manufacture operation, which has passed the whole ISO9001 quality management system certification, and the products has passed the 3 C, CE, CB, VDE authentication and ROHS, etc. Our network has been throughout the river north and south, and the products has been exported to southeast Asia and the European and American market.



The company is in the specialized production of commercial lighting, engineering lighting, home lighting, lighting electric series products. The products have covered five series: Yinrui series include down light, ceiling light, bean pot lamp, spotlight, halogen lamp and wall washer light. Jingrui series include LED ceiling light, LED down light, LED wall lamp, LED spotlight, LED hanging light, LED corner lamp , LED grille spotlight, LED rope light, LED jewelry lamp. LED outdoor lamp, LED light source and LED drive. Mingrui series lattice lights include grille surface, T5 stents, mine lamp and supermarket lamp. Xinrui series include energy-saving lamps, electronic transformer, inductance ballasts, quartz light cup, energy-saving lamp cup, metal halide light source, metal halide electric appliance box and rail lamp. Porui series include A6 engineering switch, T9 luxury switch and K6 classic switch.

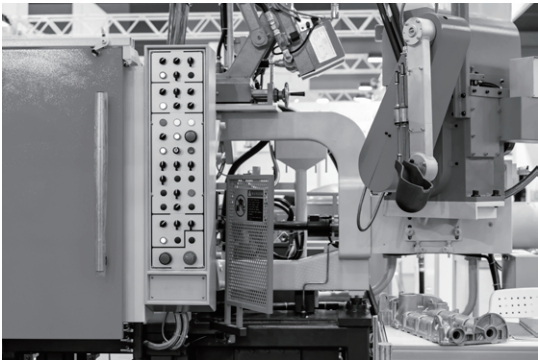

Raynice is targeted at the "Chinese lighting lamps and lanterns high-end brands", which determined how best to develop for the band "with professional to drive lighting technology and become technology and designing leading-edge light specialist" as a new strategy. "Quality First, Customer Priority, Scientific Management, Pragmatic Innovation" always as the company quality policy, then it provides a leading design, humanity lighting technology and reliable quality lighting products for that people which pursuing high quality light environment. Raynice providing not only high quality products for customers, also the leading 3 R Sincere-without service system, which created a faith, rapid, secure service brand for customers.






PARATA SERIES / 006-014



MOBIUS SERIES / 039-052



CANINO SERIES / 015-022

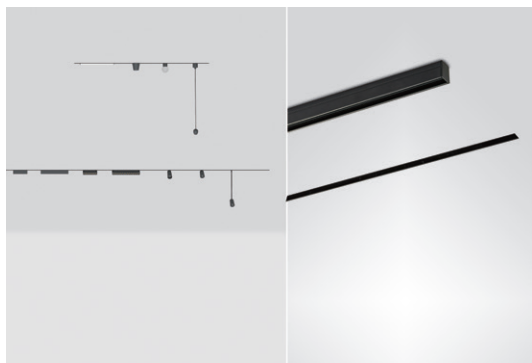

FABIO SERIES / 053-064



GUBBIO SERIES / 023-028



PRATO SERIES / 065-084



ROCCA SERIES / 029-038





BURANO SERIES / 085-094



PARATA SERIES


DC24V

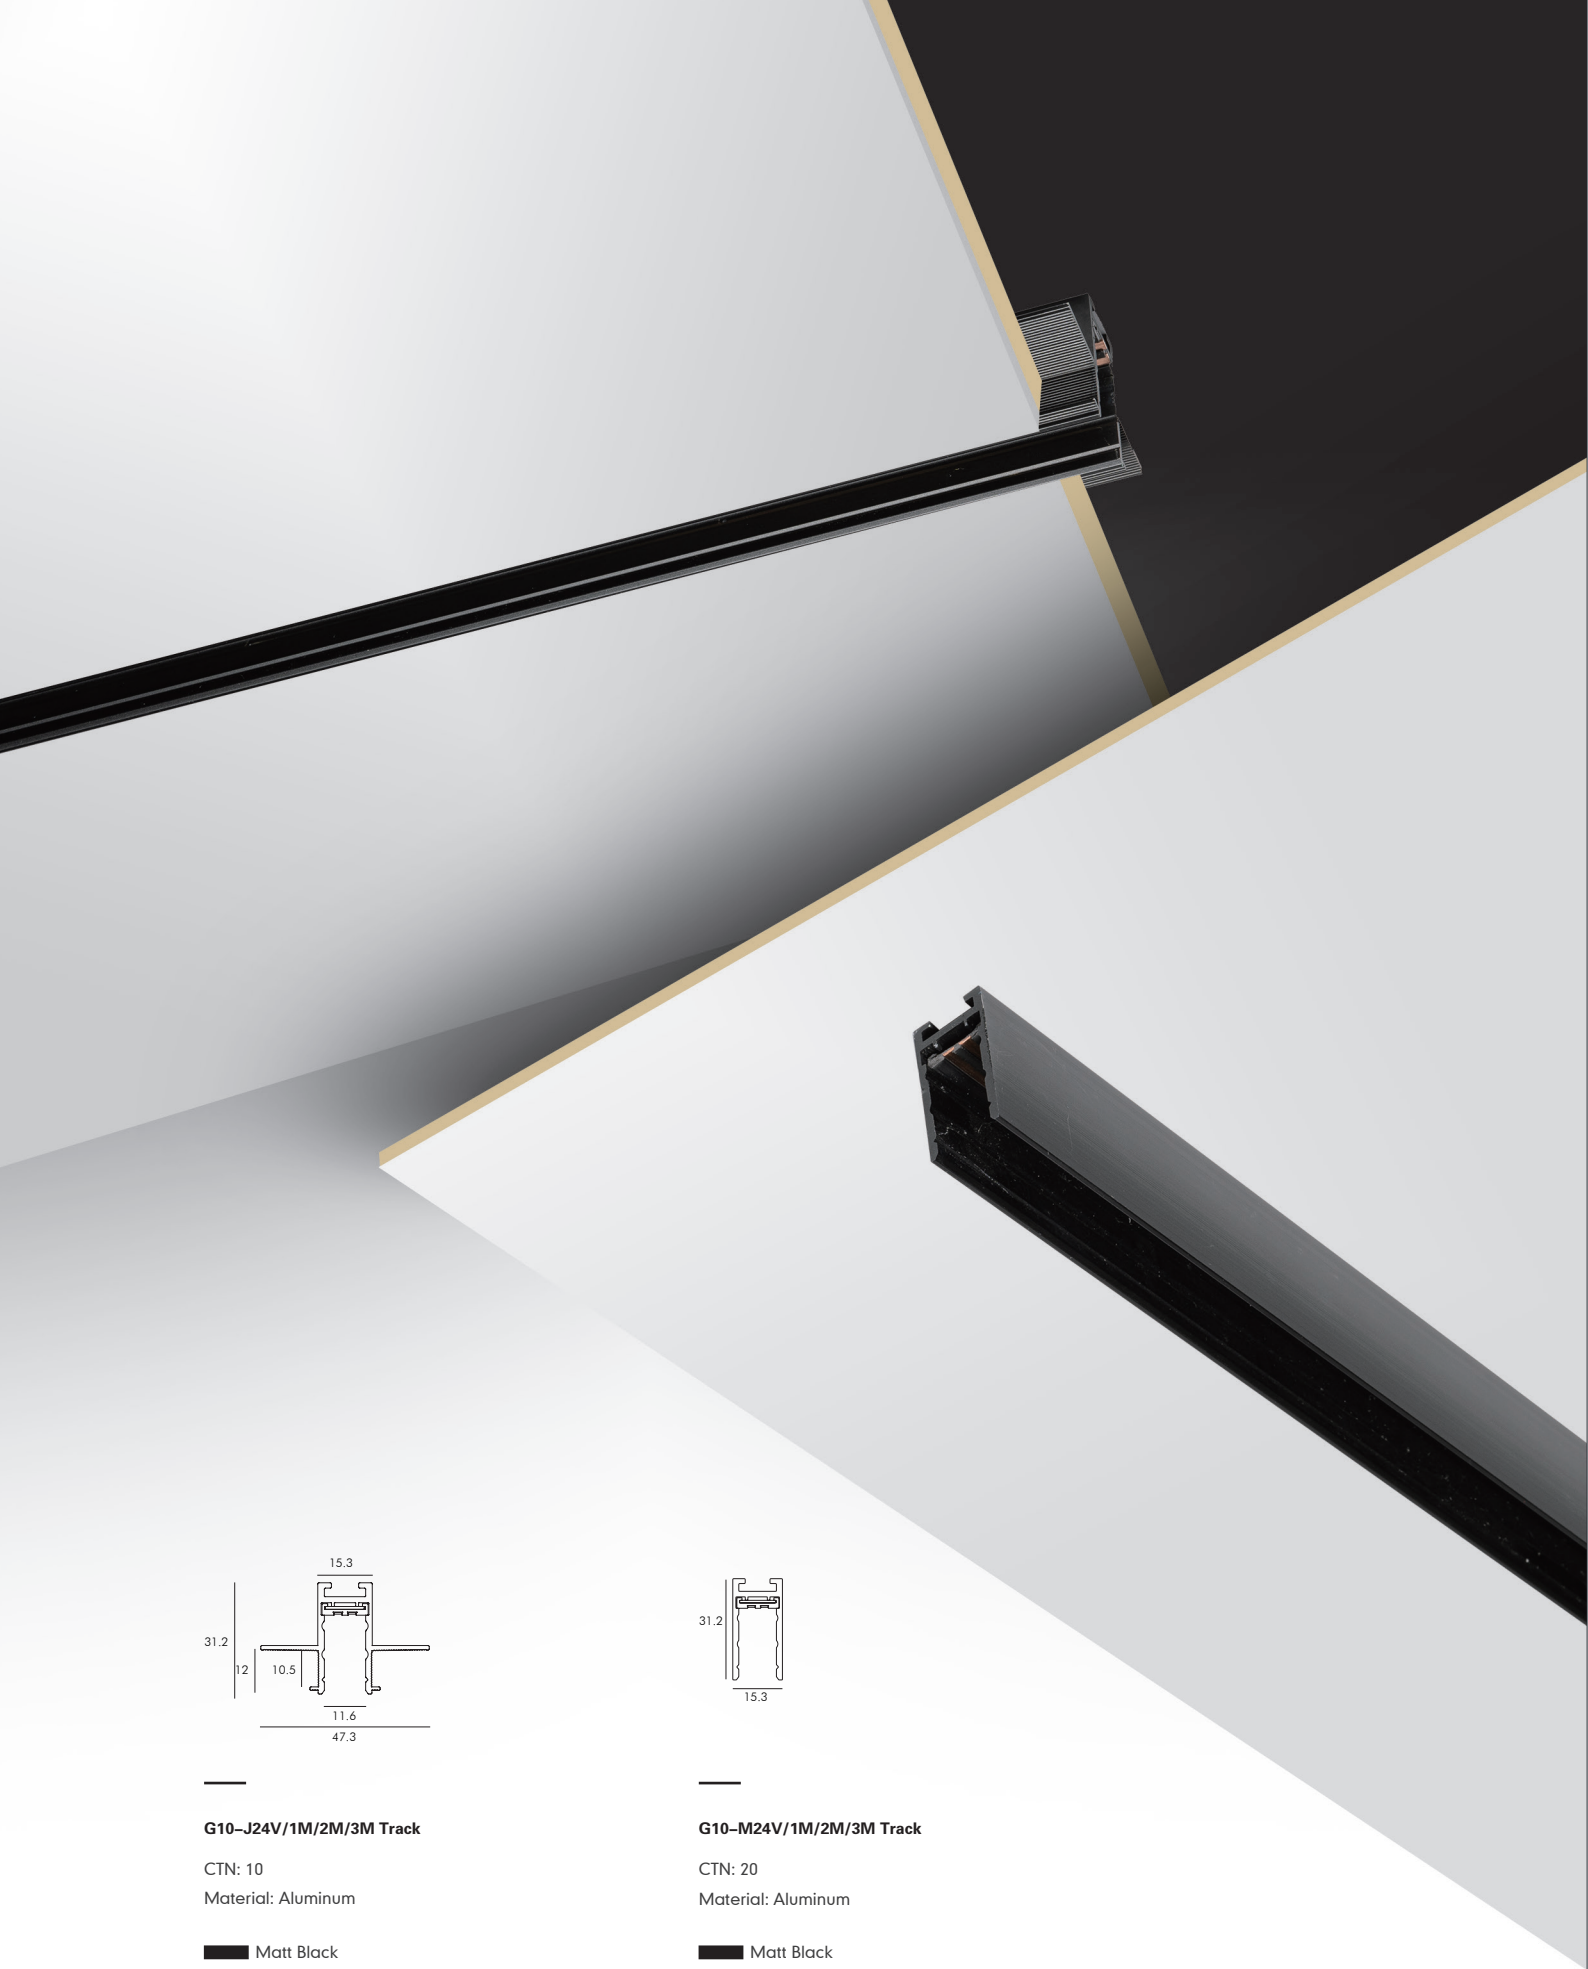

G10-J24V/1M/2M/3M Track

CTN: 10
Material: Aluminum

 Matt Black





G10-M24V/1M/2M/3M Track

CTN: 20
Material: Aluminum

 Matt Black

PARATA



G10-MZ01/6W

LED: SMD
Power: 6W
Flux(Lm): 516Lm
Angle: 40°
CTN: 30
Material: Aluminum

G10-MZ02/12W

LED: SMD
Power: 12W
Flux(Lm): 1031Lm
Angle: 40°
CTN: 30
Material: Aluminum



Colortemperature



Color


 Grey+Black

IP 20	CRI 90	DC24V
----------	-----------	-------

PARATA



PARATA

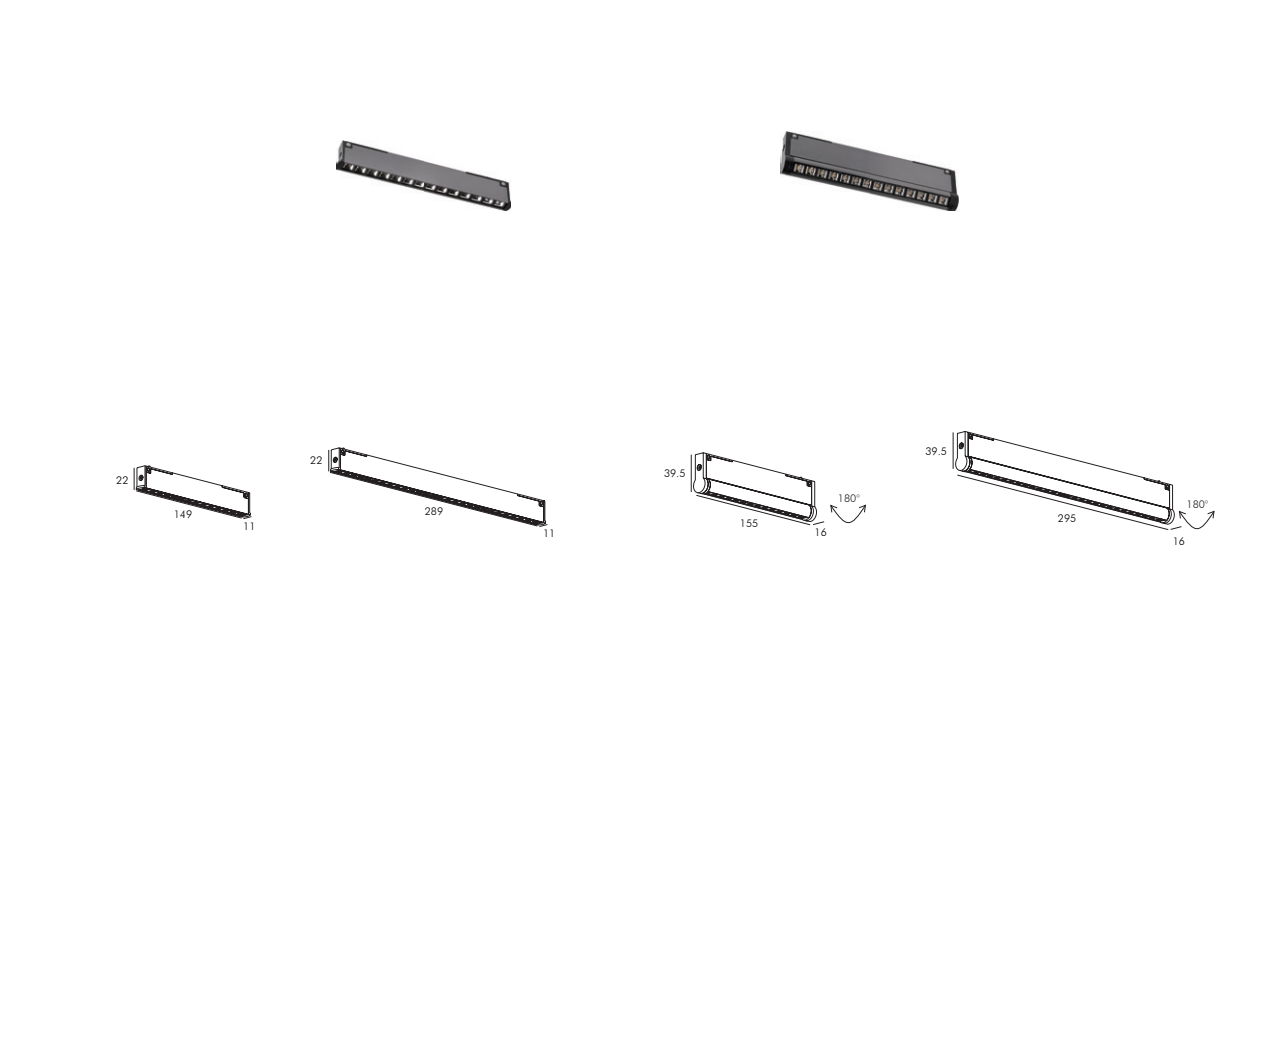

G10-MZ03/6W

LED: SMD
Power: 6W
Flux(Lm): 440Lm
Angle: 60°
CTN: 30
Material: Aluminum

G10-MZ04/12W

LED: SMD
Power: 12W
Flux(Lm): 846Lm
Angle: 60°
CTN: 30
Material: Aluminum

G10-MZ05/6W

LED: SMD
Power: 6W
Flux(Lm): 440Lm
Angle: 60°
CTN: 30
Material: Aluminum

G10-MZ06/12W

LED: SMD
Power: 12W
Flux(Lm): 846Lm
Angle: 60°
CTN: 30
Material: Aluminum

Colortemperature





Color

Grey+Black

IP 20	CRI 90	DC24V
----------	-----------	-------



PARATA



G10-MZ07/7W

LED: COB
Power: 7W
Flux(Lm): 397Lm
Angle: 24°/36°
CTN: 20
Material: Aluminum

G10-MZ08/12W

LED: COB
Power: 12W
Flux(Lm): 799Lm
Angle: 24°/36°
CTN: 20
Material: Aluminum

Colortemperature




Color

Grey+Black

IP 20	CRI 95	DC24V
----------	-----------	-------

PARATA



G10-MZ09/7W

LED: COB
Power: 7W
Flux(Lm): 397Lm
Angle: 24°/36°
CTN: 20
Material: Aluminum

G10-MZ10/12W

LED: COB
Power: 12W
Flux(Lm): 799Lm
Angle: 24°/36°
CTN: 20
Material: Aluminum

Colortemperature





Color




IP 20	CRI 95	DC24V
----------	-----------	-------

PARATA




G10-J24V Plane Conner

CTN: 30
Material: Aluminum




G10-J24V Inner Conner

CTN: 30
Material: Aluminum




G10-M24V Plane Conner

CTN: 30
Material: Aluminum




G10-M24V Inner Conner

CTN: 30
Material: Aluminum




G10 Power

CTN: 50
Material: Aluminum



G10 Power Connector

CTN: 50
Material: Aluminum



G10 Power Conner Connector

CTN: 50
Material: Aluminum







CANINO




SERIES

DC48V

CANINO

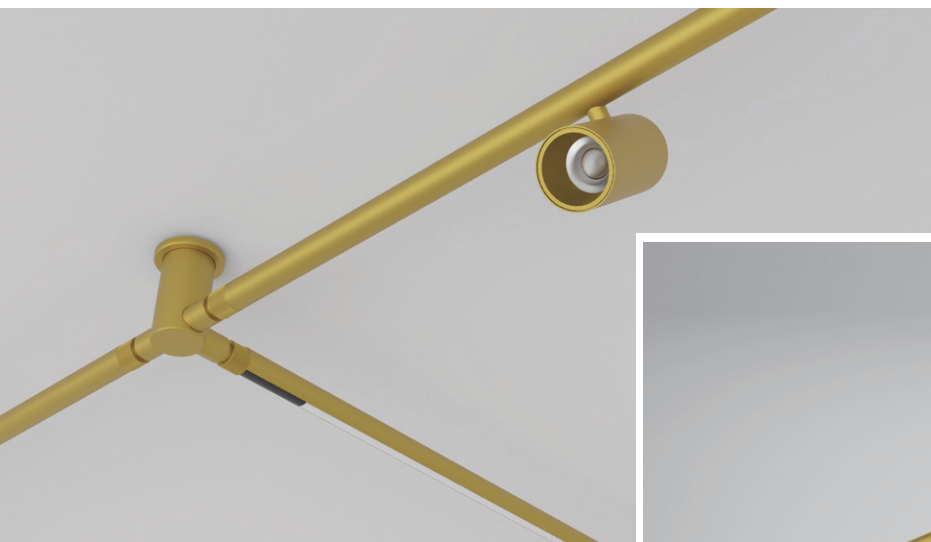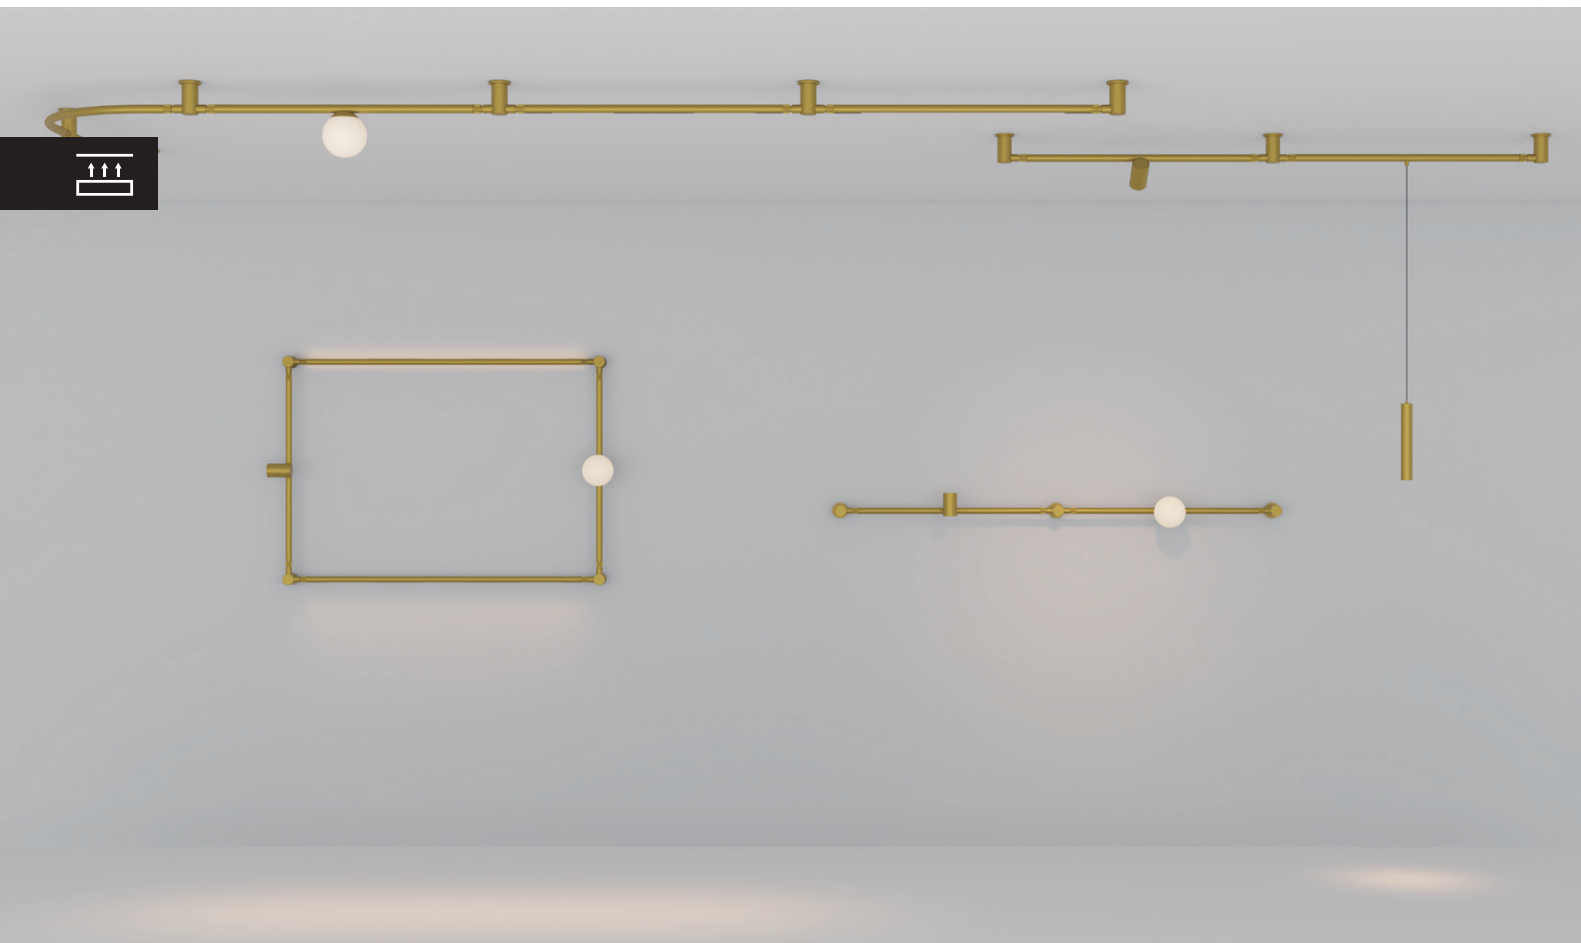

CANINO



CY-MZ01/10W

LED: Bridgelux SMD
Power: 10W
Flux(Lm): /Lm
Angle: 40°
CTN: 30
Material: Aluminum
Optional: DALI

CY-MZ02/15W

LED: Bridgelux SMD
Power: 15W
Flux(Lm): /Lm
Angle: 40°
CTN: 30
Material: Aluminum
Optional: DALI


CY-MZ03/10W

LED: Bridgelux SMD
Power: 10W
Flux(Lm): /Lm
Angle: 110°
CTN: 30
Material: Aluminum
Optional: DALI

CY-MZ04/15W

LED: Bridgelux SMD
Power: 15W
Flux(Lm): /Lm
Angle: 110°
CTN: 30
Material: Aluminum
Optional: DALI

Colortemperature




Color

Satin Gold+Black

IP 20	CRI 90	DC48V
----------	-----------	-------

CANINO

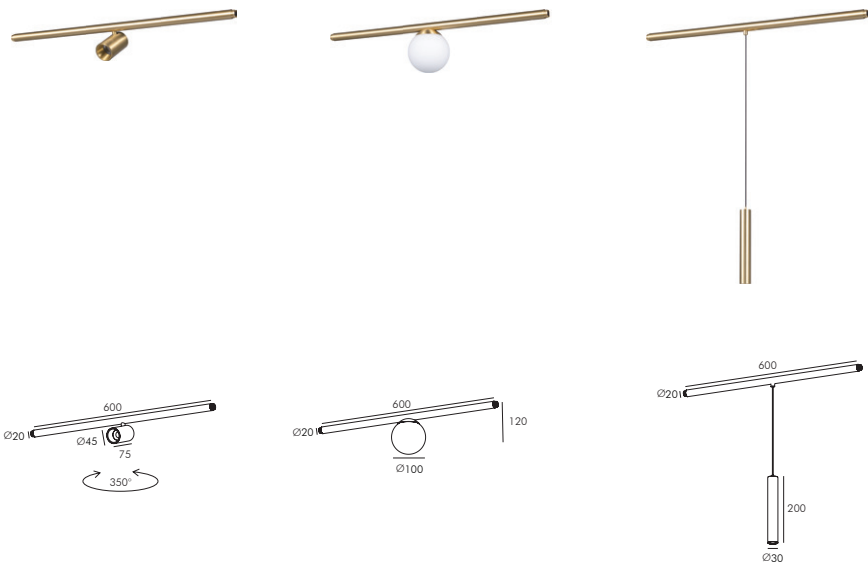

CY-MZ05/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): /Lm
Angle: 24°/35°
CTN: 20
Material: Aluminum
Optional: DALI

CY-MZ06/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): /Lm
Angle: /
CTN: 12
Material: Aluminum
Optional: DALI


CY-MZ07/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): /Lm
Angle: 24°/35°
CTN: 20
Material: Aluminum
Optional: DALI


Colortemperature



Color



CANINO

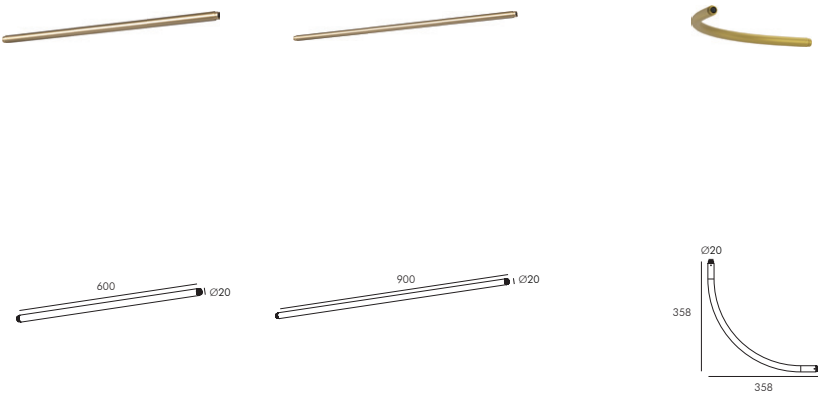

CY-L600 Straight Pipe

CTN: 30
Material: Aluminum

CY-L900 Straight Pipe

CTN: 30
Material: Aluminum


CY-R300 arc Tube

CTN: 20
Material: Aluminum

Color




CANINO



CY- Surface-mounted Power socket

CTN: 30
Material: Aluminum


Satin Gold



CY- Ceiling-mounted Power socket

CTN: 30
Material: Aluminum


Satin Gold



CY- Surface mounted plug

CTN: 30
Material: Aluminum


Satin Gold



CY-Type I Surface-mounted Power socket

CTN: 30
Material: Aluminum


Satin Gold



CY-Type I Ceiling-mounted Power socket

CTN: 30
Material: Aluminum

Satin Gold



CY-Type I Surface mounted Connector

CTN: 30
Material: Aluminum


Satin Gold



CY-Type L Surface-mounted Power socket

CTN: 30
Material: Aluminum


Satin Gold



CY-Type L Ceiling-mounted Power socket

CTN: 30
Material: Aluminum

Satin Gold




CY-Type L Surface mounted Connector

CTN: 30
Material: Aluminum

Satin Gold


CANINO



CY-Type T Surface-mounted Power socket

CTN: 30
Material: Aluminum


Satin Gold



CY-Type+Surface mounted Connector

CTN: 30
Material: Aluminum

Satin Gold



CY Hoisting Assembly

CTN: 50
Material: Aluminum

Satin Gold



QS Embedded Component

CTN: 30
Material: Aluminum

Satin Gold



QS Long Strip Power Box

CTN: 12
Material: iron

Satin Gold





GUBBIO

SERIES

DC24V



GUBBIO



SL74529-MZ01/7W

LED: SMD
Power: 7W
Flux(Lm): 602Lm
Angle: 24°/36°/45°
CTN: 30
Material: Aluminum

SL74529-MZ02/5W

LED: SMD
Power: 5W
Flux(Lm): 255Lm
Angle: 250°
CTN: 30
Material: Aluminum

Colortemperature





Color

Sand Black

IP	CRI	DC24V
20	90	

GUBBIO



SL74529/Connection Module

CTN: 30
Material: Aluminum

Sand Black

SL74529/Touchless Sensor Module

CTN: 30
Material: Aluminum

Sand Black



SL74529/Recessed Component

Excluding power supply
CTN: 30
Material: Aluminum

Sand Black

SLC74529/Surface-mounted Component

Input:AC220V
Output:DC24V 30W
CTN: 30
Material: Aluminum

Sand Black



SL74529/End Cap B


CTN: 50
Material: Aluminum

Sand Black

SL74529/End Cap A

CTN: 50
Material: Aluminum


Sand Black



SL74529/Hanging reinforce the connector

CTN: 50
Material: Aluminum


Sand Black



HL74529-I/Pendant Kit

Input:AC220V
Output:DC24V 60W
CTN: 16
Material: Aluminum

Sand Black




HL74529-V/Pendant Kit

Input:AC220V
Output:DC24V 30W
CTN: 16
Material: Aluminum



Sand Black

ROCCA SERIES

DC24V

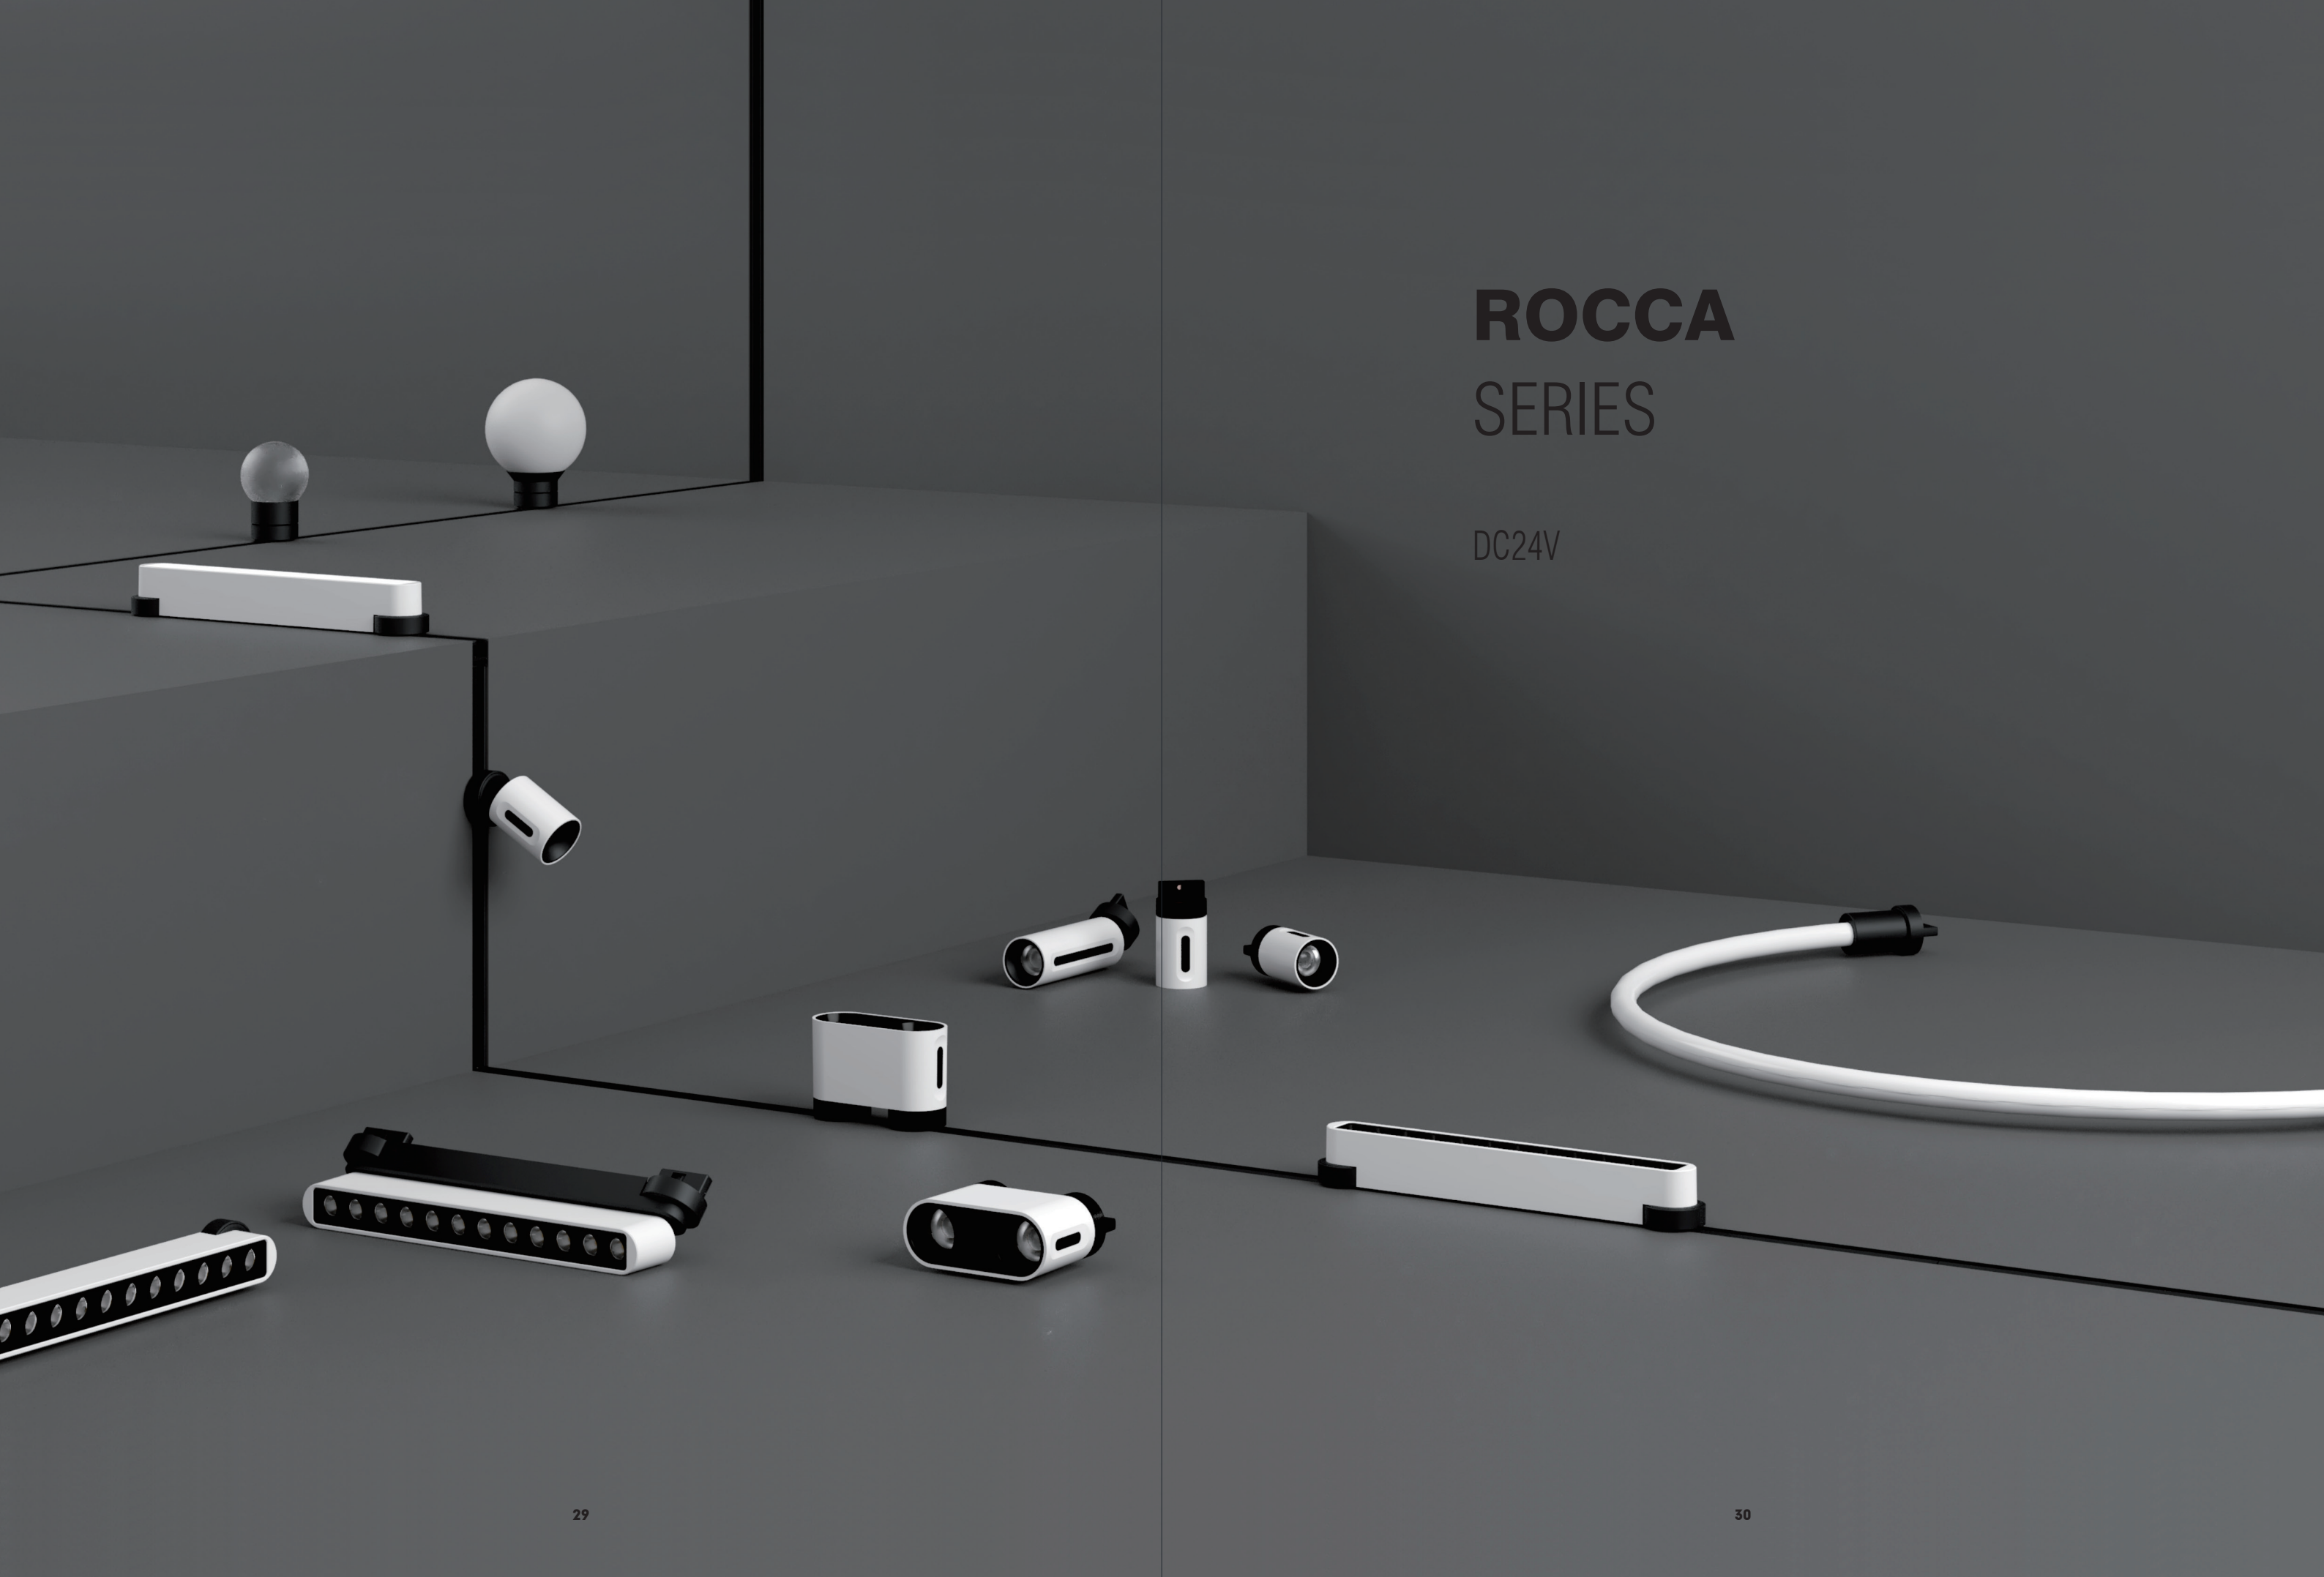

ROCCA

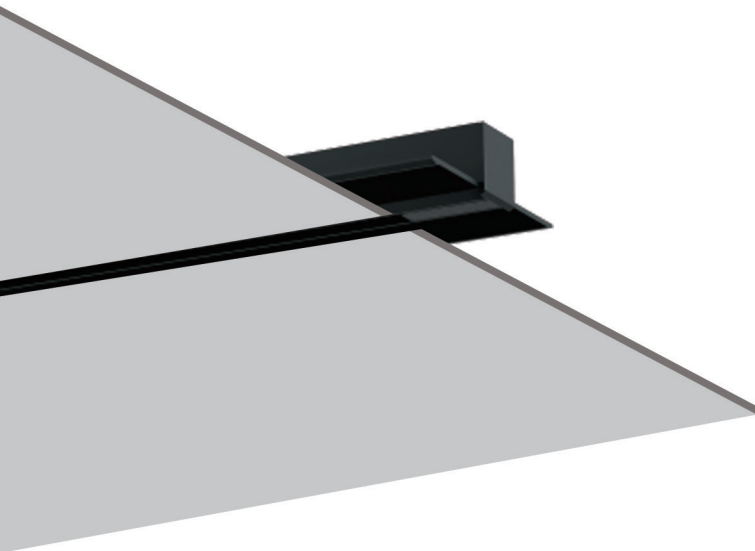

CZ-W/1M Track



CTN: 18
Material: Aluminum

■ Oxidation Black

CZ-W/2M Track

CTN: 12
Material: Aluminum

■ Oxidation Black

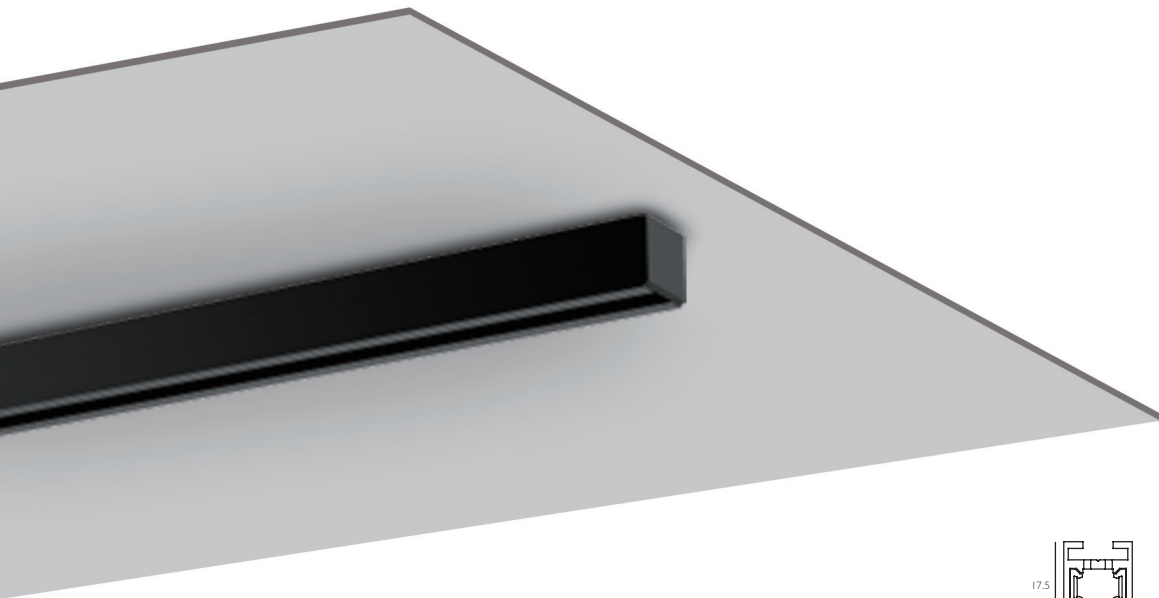

CZ-MS/1M Track

CTN: 8
Material: Aluminum



■ Oxidized Sandblasted
Matte Black

CZ-MS/2M Track

CTN: 12
Material: Aluminum

■ Oxidized Sandblasted
Matte Black

ROCCA



CZ-MZ01/5W

LED: LatticePower SMD
Power: 5W
Flux(Lm): 320Lm
Angle: 20°/30°/40°
CTN: 30
Material: Aluminum+PC

CZ-MZ02/2 x 5W

LED: LatticePower SMD
Power: 2x5W
Flux(Lm): 617Lm
Angle: 20°/30°/40°
CTN: 30
Material: Aluminum+PC

CZ-MZ03/5W

LED: LatticePower SMD
Power: 5W
Flux(Lm): 320Lm
Angle: 20°/30°/40°
CTN: 30
Material: Aluminum+PC

CZ-MZ04/7W

LED: LatticePower SMD
Power: 7W
Flux(Lm): 378Lm
Angle: 20°/30°/40°
CTN: 30
Material: Aluminum+PC

Colortemperature



Color


■ Matt White+Black

IP 20	CRI 90	DC24V
----------	-----------	-------



ROCCA

ROCCA

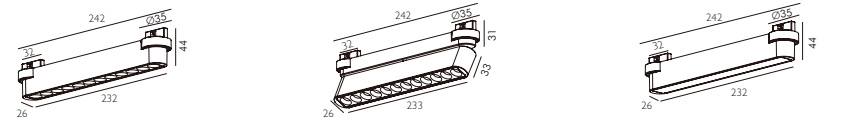

CZ-MZ06/12 x 1W

LED: Smalite SMD
Power: 12x1W
Flux(Lm): 788Lm
Angle: 24°/36°
CTN: 30
Material: Aluminum+PC

CZ-MZ07/12 x 1W

LED: Smalite SMD
Power: 12x1W
Flux(Lm): 788Lm
Angle: 24°/36°
CTN: 30
Material: Aluminum+PC

CZ-MZ08/10W

LED: OSRAM SMD
Power: 10W
Flux(Lm): 522Lm
Angle: 100°
CTN: 30
Material: Aluminum+PC

Colortemperature




Color

■ Matt White+Black



IP 20	CRI 90	DC24V
----------	-----------	-------



ROCCA

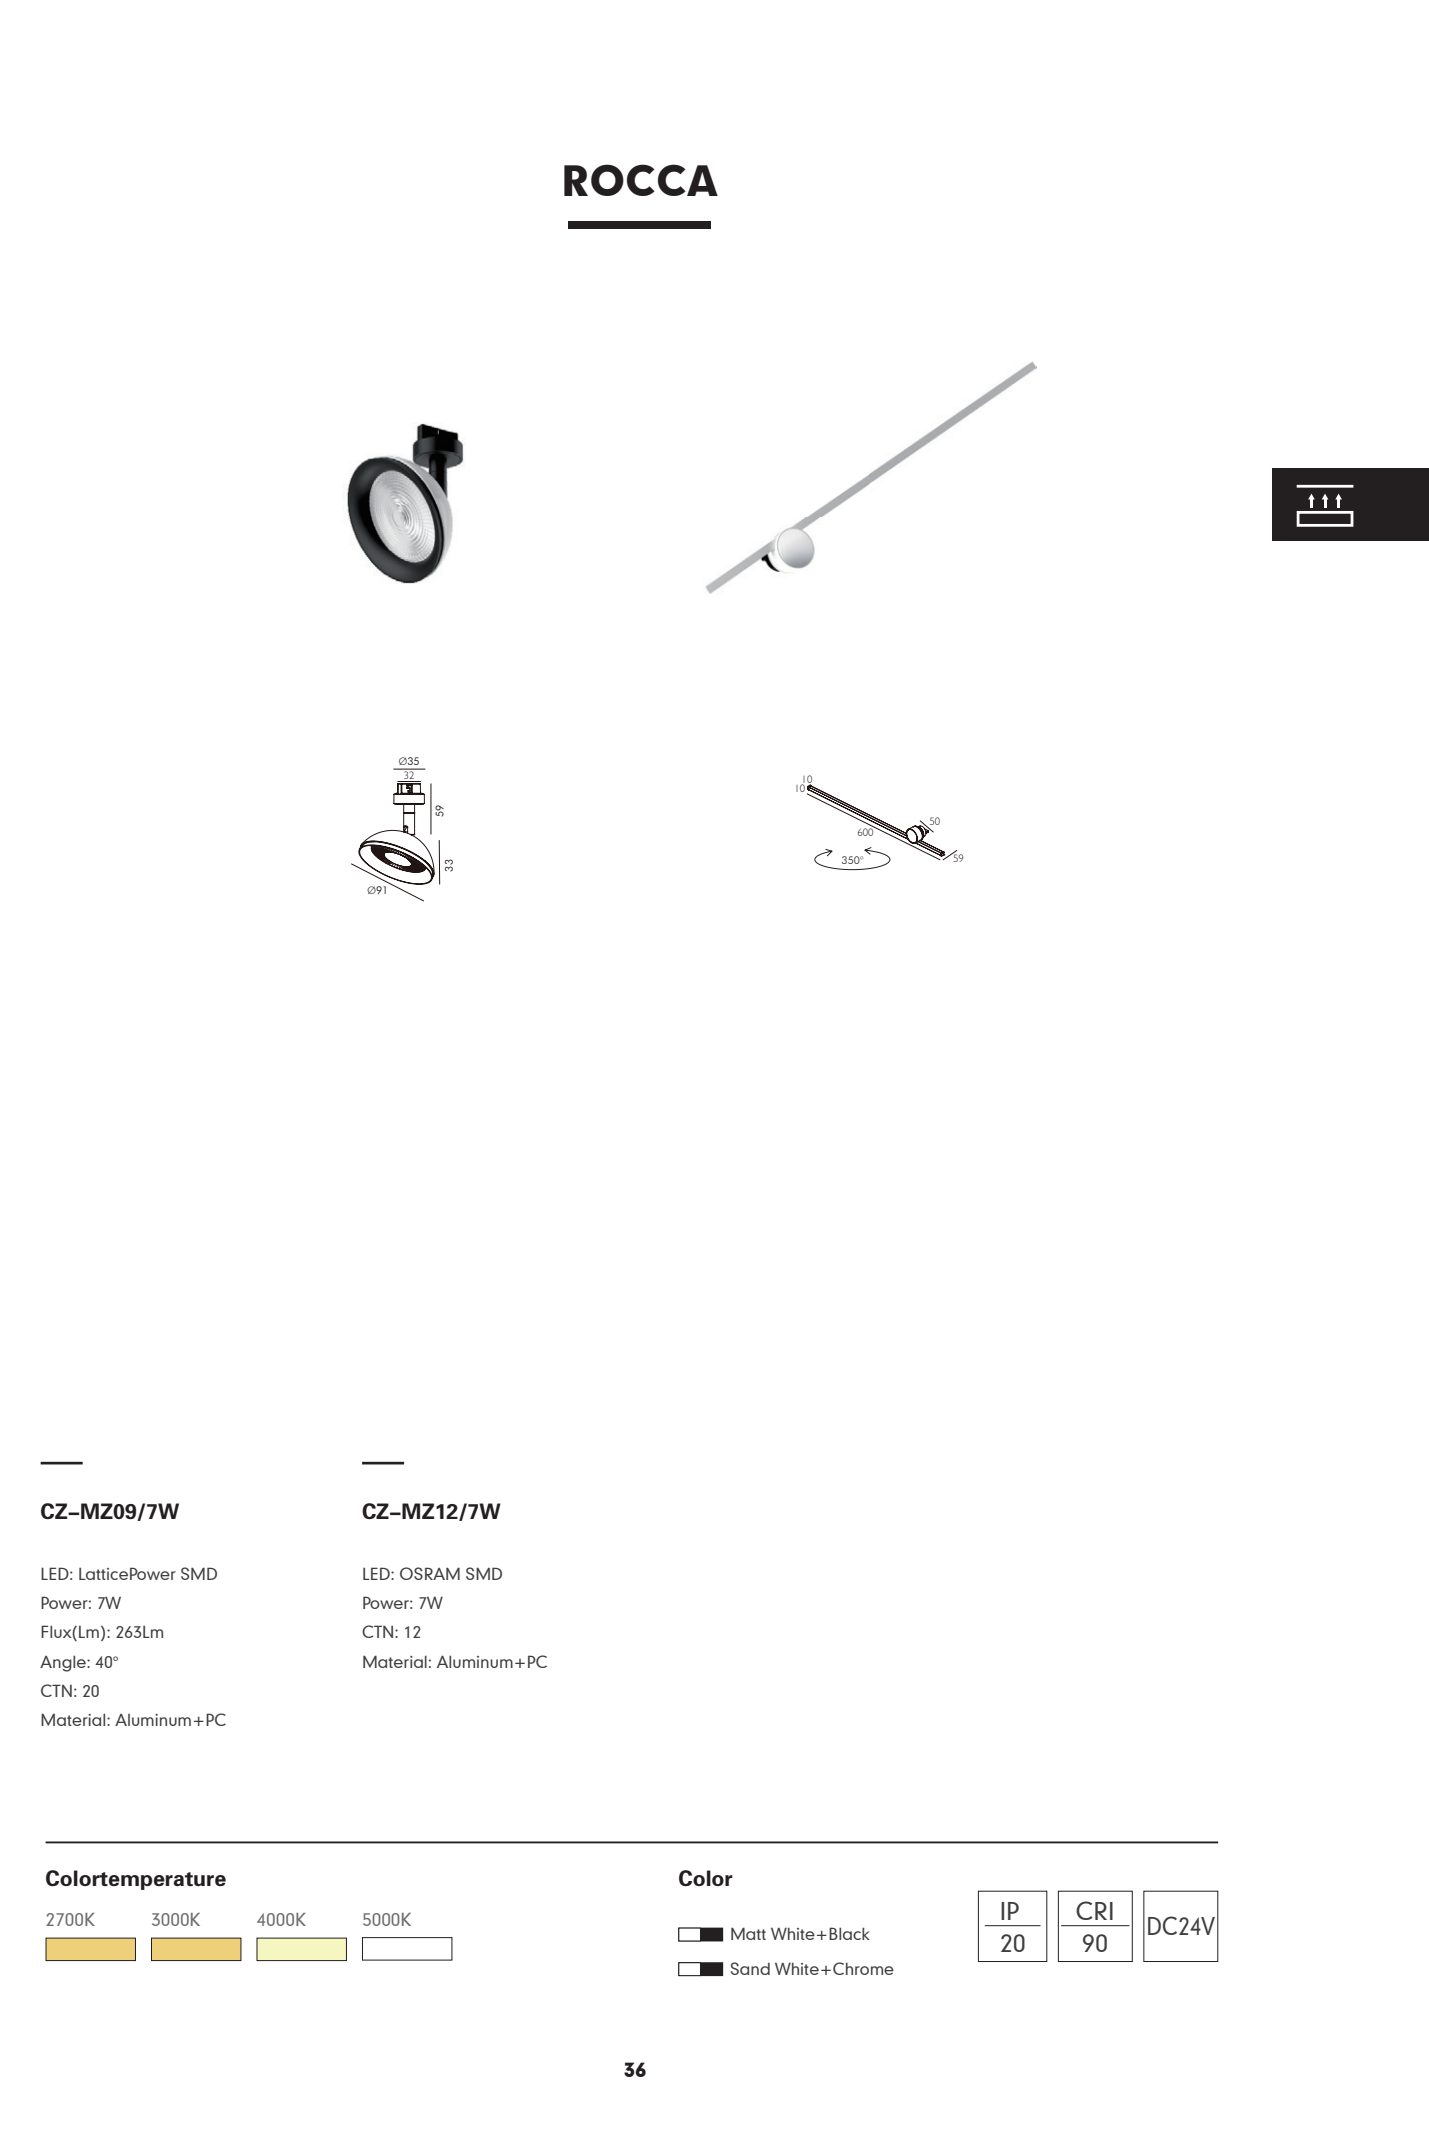

ROCCA




CZ-MZ09/7W

LED: LatticePower SMD
Power: 7W
Flux(Lm): 263Lm
Angle: 40°
CTN: 20
Material: Aluminum+PC

CZ-MZ12/7W

LED: OSRAM SMD
Power: 7W
CTN: 12
Material: Aluminum+PC

Colortemperature



Color

- ☐ Matt White+Black
- ☐ Sand White+Chrome

IP	CRI	DC24V
20	90	

ROCCA



CZ-MZ10/2W

LED: LatticePower SMD
Power: 2W
Flux(Lm): 113Lm
Angle: /
CTN: 30
Material: Aluminum+PC

CZ-MZ10/4W

LED: LatticePower SMD
Power: 4W
Flux(Lm): 157Lm
Angle: /
CTN: 20
Material: Aluminum+PC

Colortemperature



Color

Matt Black

IP	CRI	DC24V
20	90	

ROCCA



CZ-MZ11/5W

LED: LatticePower SMD
Power: 5W
Flux(Lm): 320Lm
Angle: 20°/30°/40°
CTN: 20
Material: Aluminum+PC

CZ-MZ13/20W

LED: SANAN SMD
Power: 20W
Flux(Lm): 733Lm
Angle: /
CTN: 12
Material: Aluminum+PC

CZ-MZ13/40W

LED: SANAN SMD
Power: 40W
Flux(Lm): 1587Lm
Angle: /
CTN: 12
Material: Aluminum+PC

Colortemperature





Color

Matt White+Black

IP	CRI	DC24V
20	90	

ROCCA



CZ-W Power Connector

CTN: 50
Material: PC

Black

CZ-M Power Connector




CTN: 50
Material: PC

Black

CZ Power Conner Connector

CTN: 50
Material: PC

Black



CZ-W Plane Conner

CTN: 30
Material: Aluminum

Oxidation Black

CZ-W Inner Conner

CTN: 30
Material: Aluminum



Oxidation Black

CZ-W Connecting piece

CTN: 10
Material: Iron

Cataphoresis Black

ROCCA



CZ-MS Plane Conner

CTN: 30
Material: Aluminum

Matt Black

CZ-MS Inner Conner

CTN: 50
Material: Aluminum


Matt Black

MOBIUS SERIES

DC48V



MOBIUS




CD-I1.0 Track

CTN: 9
Material: Aluminum

- Brown color+Black
- Green color +Black

MOBIUS



CD-IT.5 Track

CTN: 6
Material: Aluminum


- Brown color+Black
- Green color +Black



CD-T2.0 Track

CTN: 6
Material: Aluminum

- Brown color+Black
- Green color +Black



CD-S01 Track

CTN: 1
Material: Aluminum

- Brown color+Black
- Green color +Black



CD-Y01 Track

CTN: 1
Material: Aluminum

- Brown color+Black
- Green color +Black



CD-Y02 Track

CTN: 1
Material: Aluminum

- Brown color+Black
- Green color +Black



CD-Y03 Track

CTN: 1
Material: Aluminum






- Brown color+Black
- Green color +Black





MOBIUS

MOBIUS



CD-MZ01/5 x 1.5W

LED: LatticePower SMD
Power: 5x1.5W
Flux(Lm): 535Lm
Angle: 10°/15°/20°/30°
CTN: 30
Material: Aluminum

CD-MZ02/8 x 1.5W

LED: LatticePower SMD
Power: 8x1.5W
Flux(Lm): 690Lm
Angle: 10°/15°/20°/30°
CTN: 30
Material: Aluminum

CD-MZ03/15W

LED: Bridgelux SMD
Power: 15W
Flux(Lm): 326Lm
Angle:110°
CTN: 30
Material: Aluminum

Colortemperature



Color

Matte black

IP 20	CRI 90	DC48V	DALI	Zigbee
----------	-----------	-------	------	--------



MOBIUS



CD-MZ04/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 317Lm
Angle: 24°/50°
CTN: 12
Material: Aluminum

Colortemperature



MOBIUS




Color

■ Matt White+Black

IP	CRI	DC48V	DALI	Zigbee
20	90			

MOBIUS

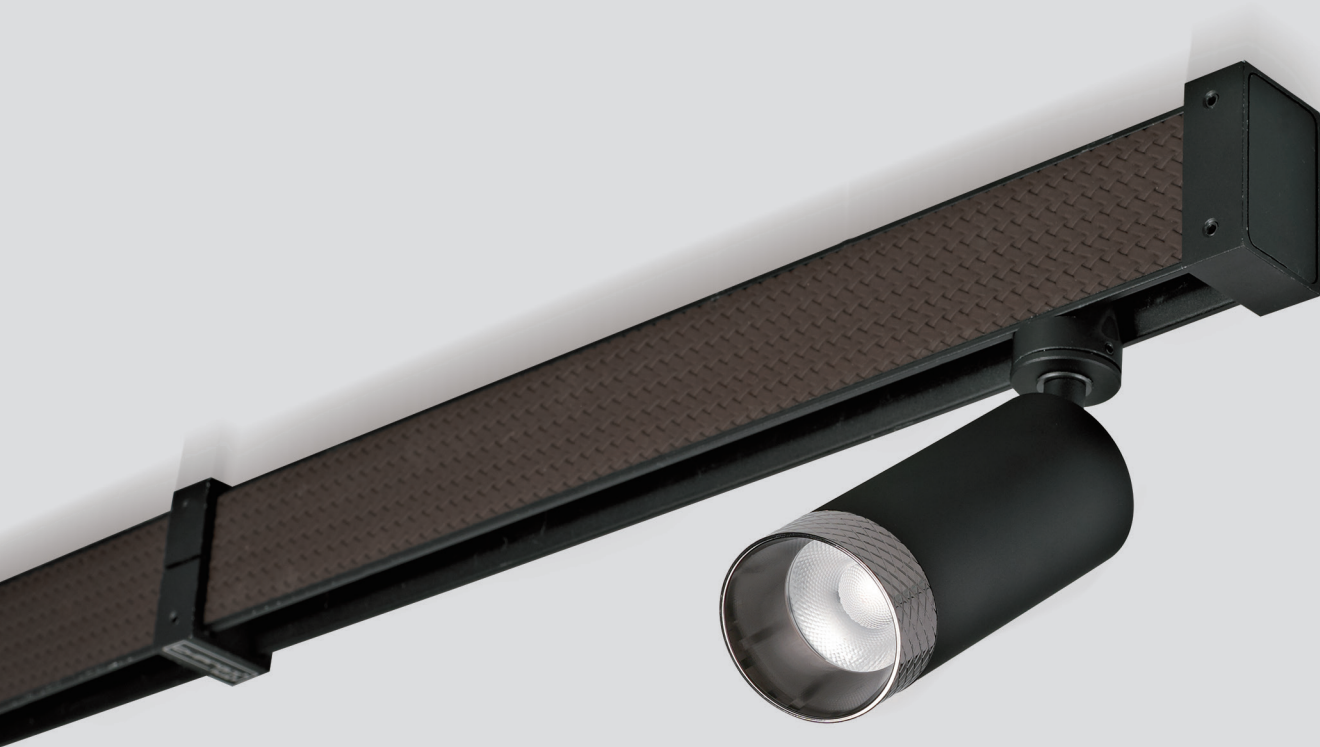

MOBIUS



CD-MZ05/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 438Lm
Angle: 15°/24°/30°
CTN: 20
Material: Aluminum

Color

- Matt Black+Pearl Black
- Matt Black+Rose Gold

CD-MZ06/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 849Lm
Angle: 15°/24°/30°
CTN: 20
Material: Aluminum

Color

- Matt Black+Pearl Black
- Matt Black+Rose Gold

CD-MZ09/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 155Lm
Angle: 15°/24°
CTN: 30
Material: Aluminum

Color

- Matt Black

Colortemperature





IP 20	CRI 90	DC48V	DALI	Zigbee
----------	-----------	-------	------	--------



MOBIUS

MOBIUS



CD-MZ07/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 253Lm
Angle: 210°
CTN: 12
Material: Aluminum

CD-MZ08/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 530Lm
Angle: 210°
CTN: 12
Material: Aluminum

Colortemperature




Color

■ Matt Black

IP 20	CRI 90	DC48V	DALI	Zigbee
----------	-----------	-------	------	--------


MOBIUS



CD Power head

CTN: 20
Material: Aluminum


Matte sand black



CD Power Connector

CTN: 30
Material: Aluminum


Matte sand black



QS Recessed Component

CTN: 30
Material: Aluminum


Sand Black



QS Rectangle Power Box

Power: 150W
WCTN: 12
Material: Aluminum

Sand Black




QS Circular power Box

Power: 150W
WCTN: 12
Material: Aluminum

Sand Black


MOBIUS



CD-I Corner

CTN: 12
Material: Aluminum


Brown color+Black
Green color +Black



CD-I Inner Corner

CTN: 20
Material: Aluminum


Brown color+Black
Green color +Black



CD Fixed Part

CTN: 50
Material: Aluminum


Matte sand black



CD End cap

CTN: 50
Material: Aluminum


Matte sand black



QS-I Wall Installation Component

CTN: 50
Material: Aluminum


Matte sand black



QS-35 Steeve Component

CTN: 50
Material: Aluminum


Matte sand black



QS-100 Steeve Component

CTN: 12
Material: Aluminum


Matte sand black



QS-300 Steeve Component

CTN: 12
Material: Aluminum

Matte sand black



QS-600 Steeve Component

CTN: 12
Material: Aluminum


Sand matte black



QS Hanging Component



CTN: 30
Material: Aluminum

Matte sand black

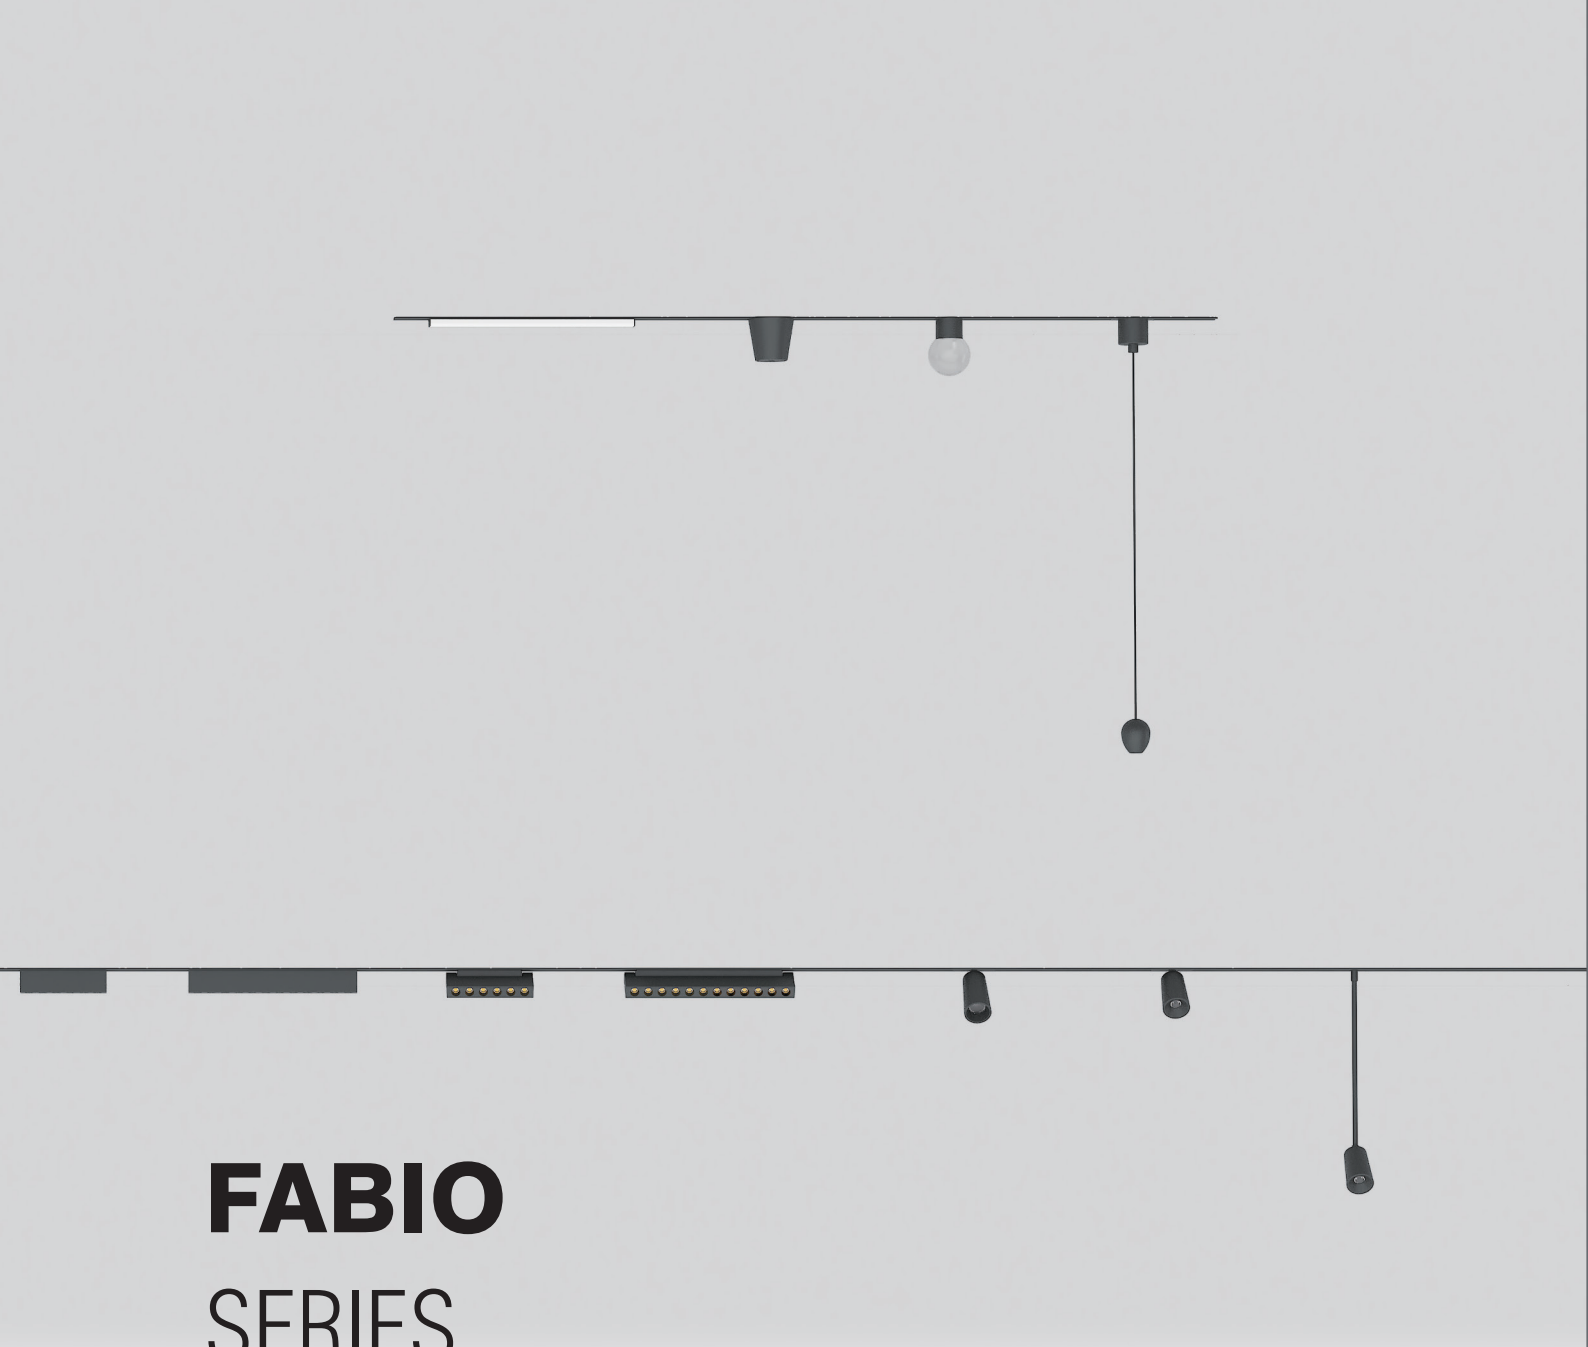

FABIO SERIES

DC24V



CL-M500



CTN: 30
Material: Aluminum

■ Matt Black

CL-M1000

CTN: 30
Material: Aluminum

■ Matt Black



503x17

CL-Q500

CTN: 30
Material: Aluminum

■ Matt Black






1003x17

CL-Q1000

CTN: 30
Material: Aluminum

■ Matt Black

FABIO

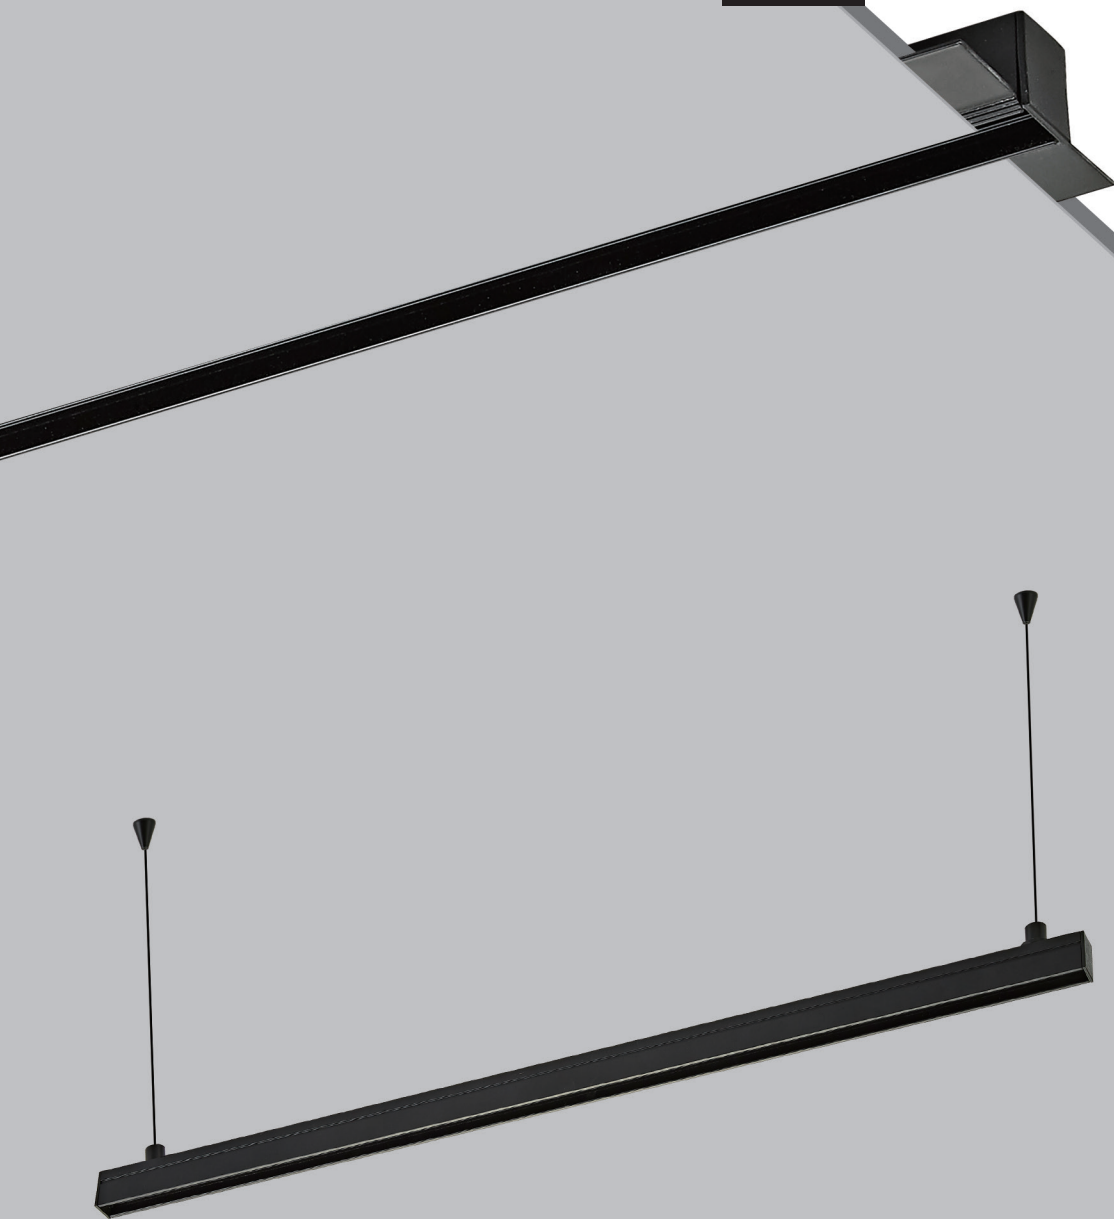

CL-W500


CTN: 30
Material: Aluminum

■ Matt Black

CL-W1000

CTN: 30
Material: Aluminum


■ Matt Black



CL-D500

CTN: 30
Material: Aluminum

■ Matt Black






CL-D1000

CTN: 30
Material: Aluminum

■ Matt Black

FABIO

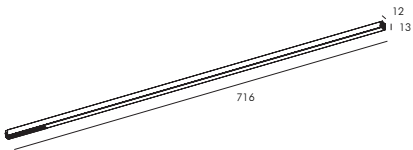

CL7609/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 160Lm
Angle: 120°
CTN: 30
Material: Aluminum+PC


CL7619/10W

LED: Bridgelux SMD
Power: 10W
Flux(Lm): 300Lm
Angle: 120°
CTN: 12
Material: Aluminum+PC

CL7620/15W


LED: Bridgelux SMD
Power: 15W
Flux(Lm): 425Lm
Angle: 120°
CTN: 9
Material: Aluminum+PC

Colortemperature



Color

■ Matt Black



FABIO



CL7608/6W


LED: Bridgelux SMD
Power: 6W
Flux(Lm): 250Lm
Angle: 90°
CTN: 30
Material: Aluminum+PC

CL7610/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 305Lm
Angle: 120°+ ∠ 10°
CTN: 30
Material: Aluminum+PC



Colortemperature




Color

■ Matt Black

IP	CRI	DC24V
20	90	

FABIO

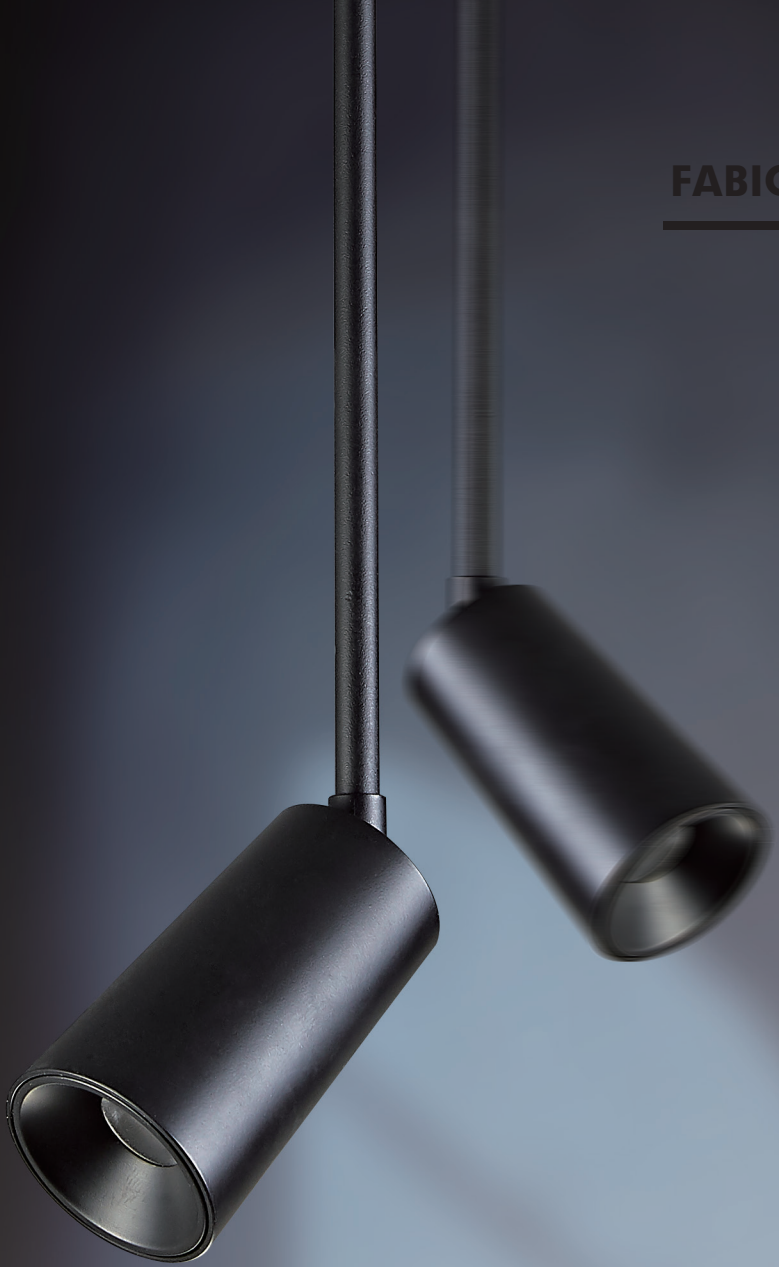


CL7613/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 140Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum+PC



Colortemperature





Color

■ Matt Black

IP	CRI	DC24V
20	90	

FABIO



CL7612/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 140Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum+PC

CL7614/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 400Lm
Angle: 30°/38°
CTN: 30
Material: Aluminum+PC

Colortemperature







Color

■ Matt Black

IP	CRI	DC24V
20	90	

FABIO



CL7615/6x1W

LED: OSRAM SMD
Power: 6x1W
Flux(Lm): 416Lm
Angle: 20°/30°/50°
CTN: 50
Material: Aluminum+PC

CL7616/12x1W

LED: OSRAM SMD
Power: 12x1W
Flux(Lm): 718Lm
Angle: 20°/30°/50°
CTN: 30
Material: Aluminum+PC

CL7617/6x1W

LED: OSRAM SMD
Power: 6x1W
Flux(Lm): 416Lm
Angle: 20°/30°/50°
CTN: 50
Material: Aluminum+PC

CL7618/12x1W

LED: OSRAM SMD
Power: 12x1W
Flux(Lm): 718Lm
Angle: 20°/30°/50°
CTN: 30
Material: Aluminum+PC

Colortemperature



Color

■ Matt Black

IP	CRI	DC24V
20	90	






FABIO



CL7621/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 136Lm
Angle: 30°
CTN: 50
Material: Aluminum+PC



CL7622/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 145Lm
Angle: 150°
CTN: 50
Material: Aluminum+PC



CL7623/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 94Lm
Angle: 15°/20°
CTN: 50
Material: Aluminum+PC




Colortemperature




Color

■ Matt Black




FABIO



CL-M Inner Corner

CTN: 30
Material: Aluminum


■ Matt Black



CL-M Plane Conner

CTN: 30
Material: Aluminum


■ Matt Black



CL-Q Inner Conner

CTN: 30
Material: Aluminum


■ Matt Black



CL-Q Plane Conner

CTN: 30
Material: Aluminum


■ Matt Black



CL-W Inner Corner

CTN: 30
Material: Aluminum


■ Matt Black



CL-W Plane Conner

CTN: 30
Material: Aluminum


■ Matt Black



CL Power Connector

CTN: 50
Material: Aluminum


■ Matt Black



CL Power Head

CTN: 100
Material: Aluminum

■ Matt Black




CL Power Conner Connector

CTN: 100
Material: Aluminum

■ Matt Black


FABIO



CL-D500 Surface Box

CTN: 30
Material: Iron


■ Matt Black



CL-D500 Recessed Box

CTN: 30
Material: Aluminum


■ Matt Black



CL-Power head B (Gesture sensor)

CTN: 30
Material: PC


■ Black




CL-Power head C (Pressure sensor)

CTN: 30
Material: PC

■ Black




Optional:CL-Power headB(Gesture sensor):Used for cabinets, reach out your hand and it will light up




Optional:CL-PowerheadC(Pressure sensor) Used for cabinets, the door lights up when opened

PRATO SERIES


DC48V

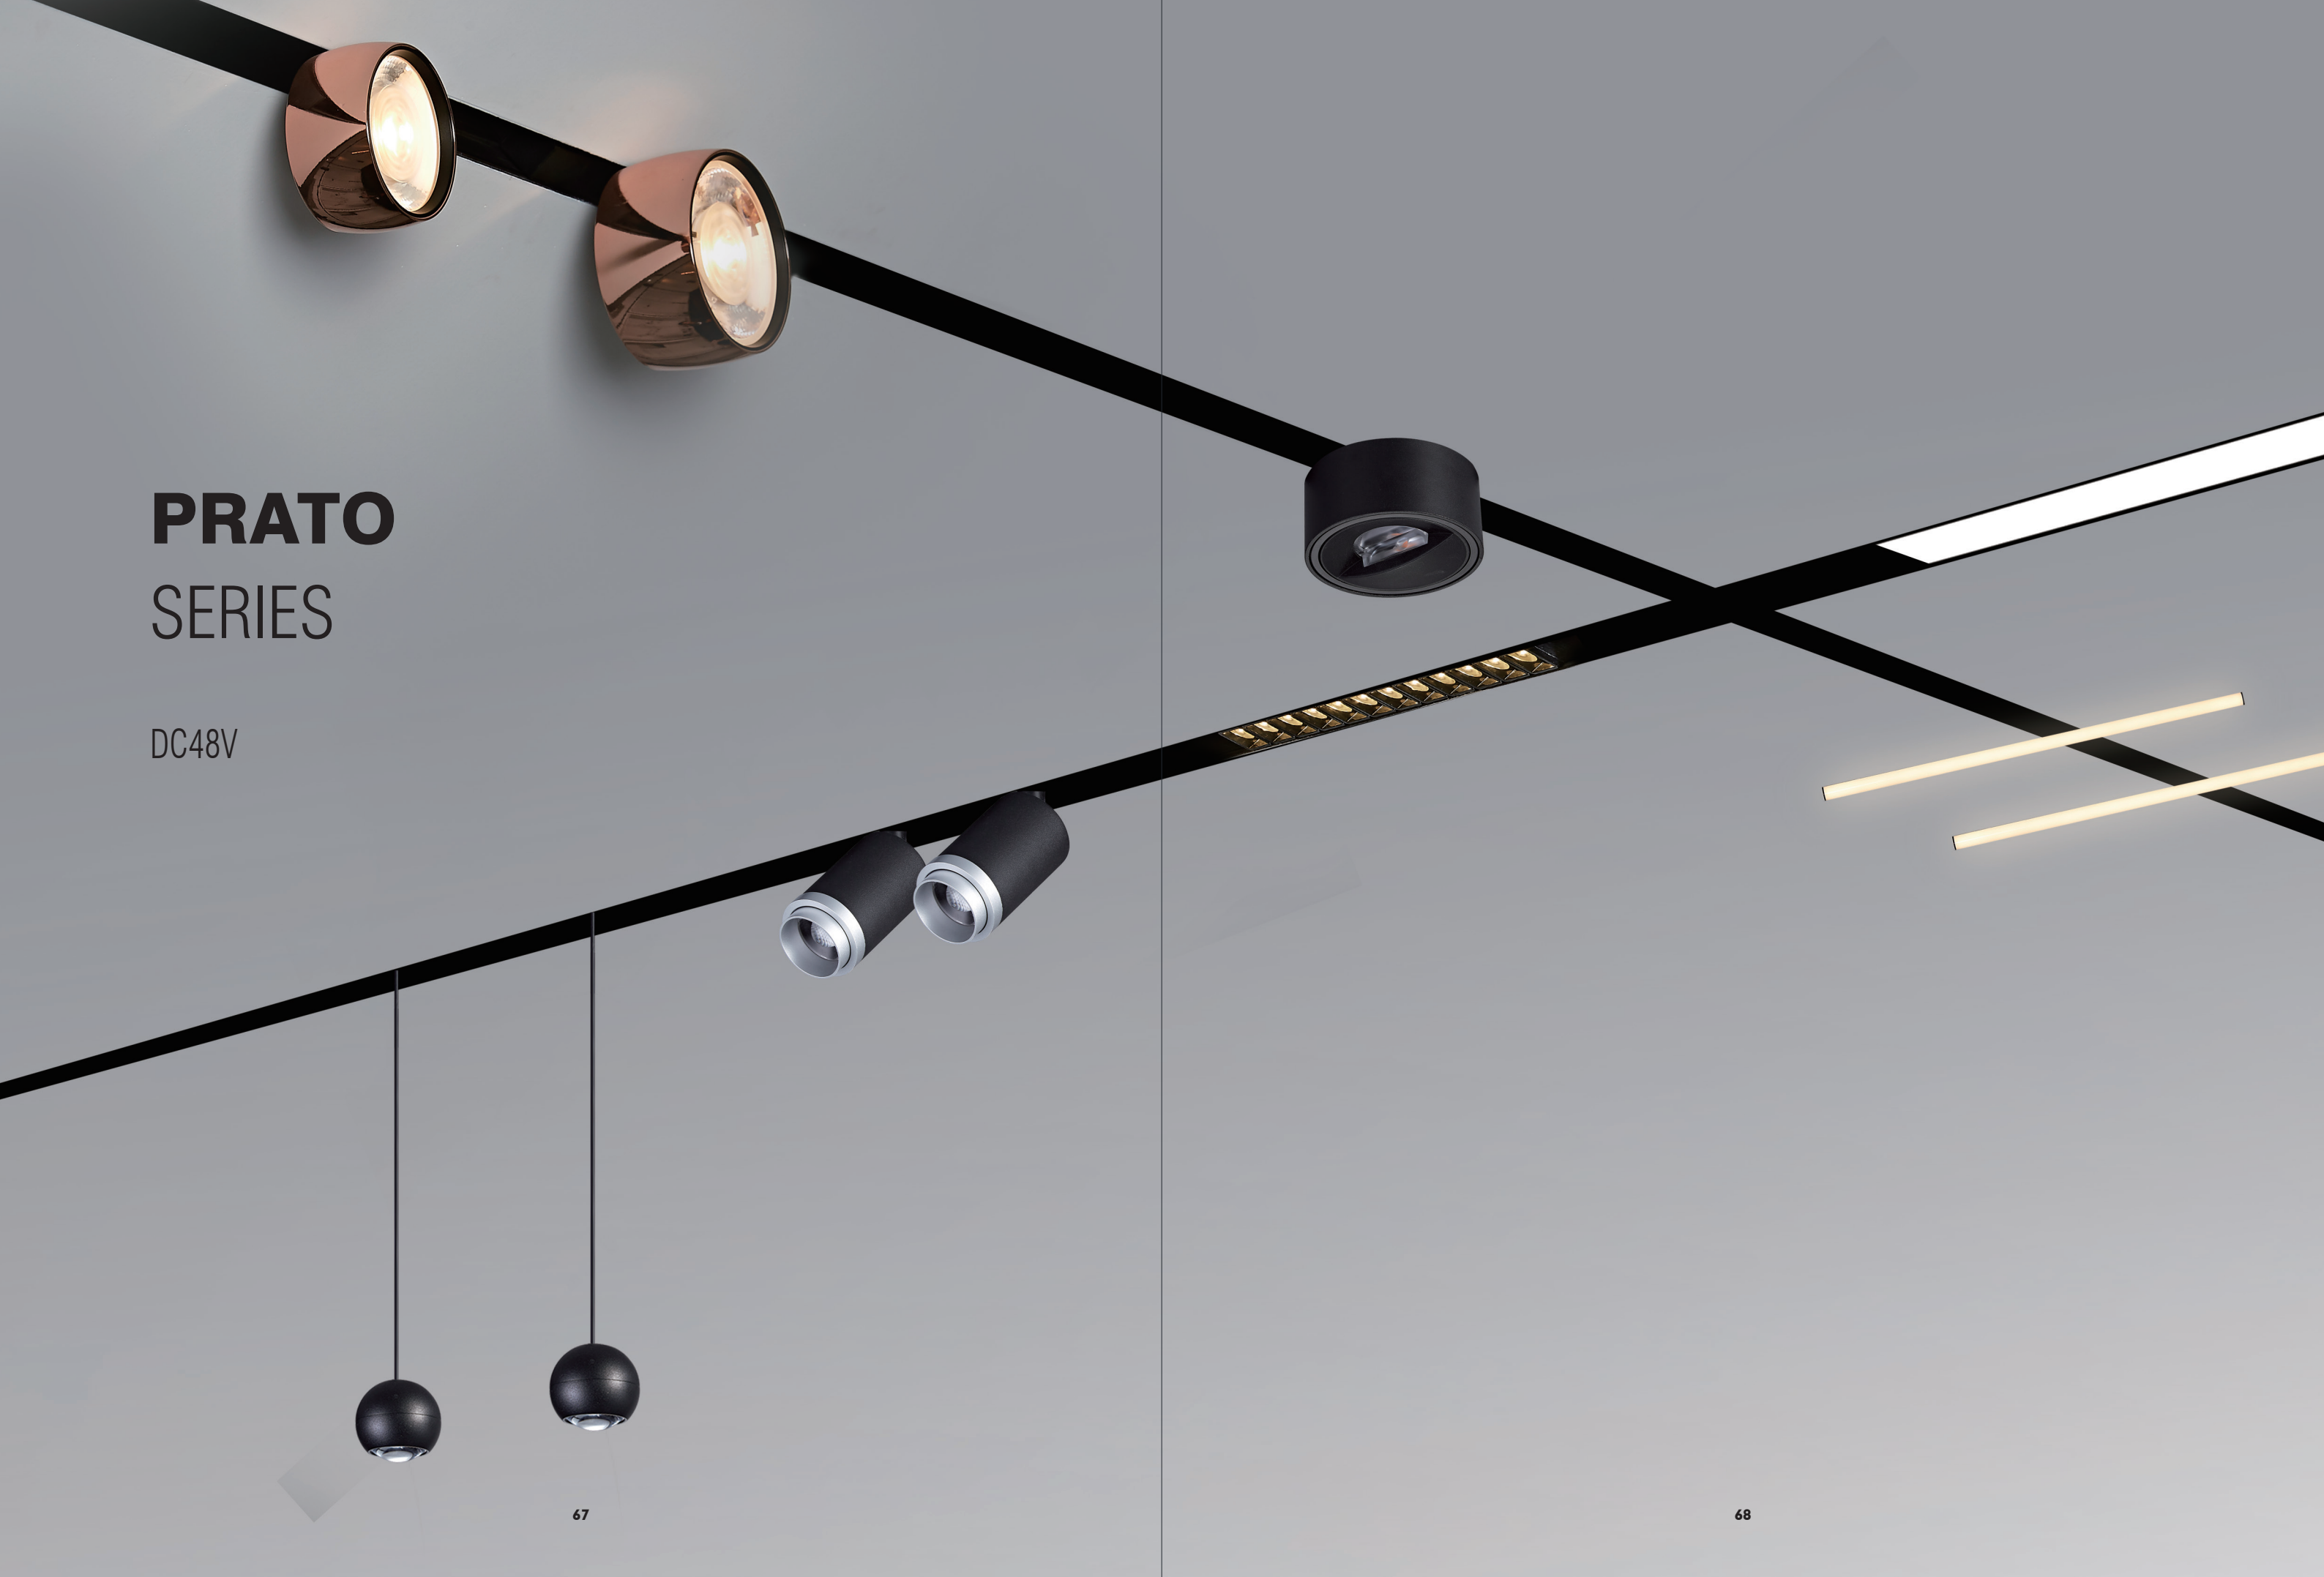

PRATO



PRATO



GD-Q48V/1M Track
CTN: 9
Material: Aluminum

■ Oxidized Matte black



GD-Q48V/1.5M Track
CTN: 6
Material: Aluminum

■ Oxidized Matte black





GD-Q48V/2M Track
CTN: 6
Material: Aluminum

■ Oxidized Matte black



GD-Q48V/3M Track
CTN: 6
Material: Aluminum

■ Oxidized Matte black



GD-N48V/1M Track
CTN: 9
Material: Aluminum

■ Oxidized Matte black



GD-N48V/1.5M Track
CTN: 6
Material: Aluminum

■ Oxidized Matte black





GD-N48V/2M Track
CTN: 6
Material: Aluminum

■ Oxidized Matte black



GD-N48V/3M Track
CTN: 6
Material: Aluminum

■ Oxidized Matte black



GD-M48V/1M Track
CTN: 9
Material: Aluminum

■ Oxidized Matte black



GD-M48V/1.5M Track
CTN: 6
Material: Aluminum

■ Oxidized Matte black



GD-M48V/2M Track
CTN: 6
Material: Aluminum


■ Oxidized Matte black



GD-M48V/3M Track
CTN: 6
Material: Aluminum

■ Oxidized Matte black

PRATO

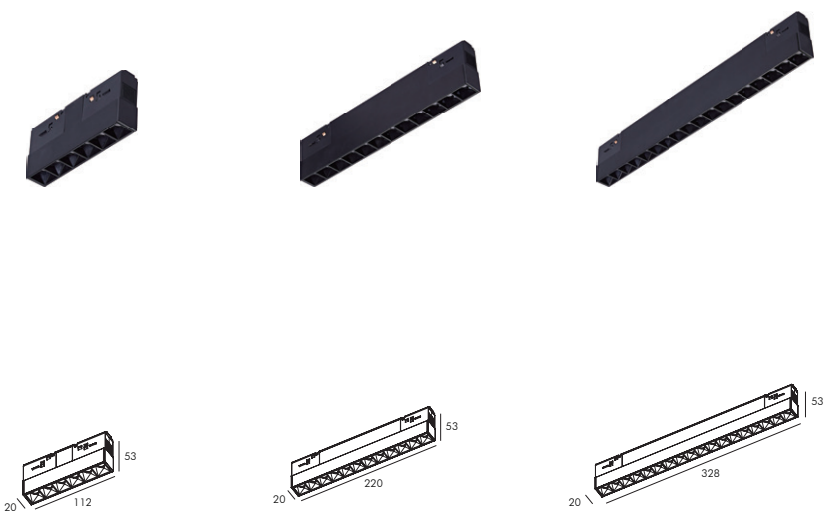

GD2001/6 x 1.5W

LED: OSRAM SMD
Power: 6x1.5W
Flux(Lm): 739Lm
Angle: 24°/15°/35°
CTN: 50
Options: ON/OFF、0-10V
Material: Aluminum+PC

GD2002/12 x 1.5W

LED: OSRAM SMD
Power: 12x1.5W
Flux(Lm): 1376Lm
Angle: 24°/15°/35°
CTN: 30
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC

GD2003/18 x 1.5W

LED: OSRAM SMD
Power: 18x1.5W
Flux(Lm): 1819Lm
Angle: 24°/15°/35°
CTN: 20
Options: ON/OFF
Material: Aluminum+PC

Colortemperature




Color

■ Sand Black

IP 20	CRI 90	DC48V
----------	-----------	-------

PRATO

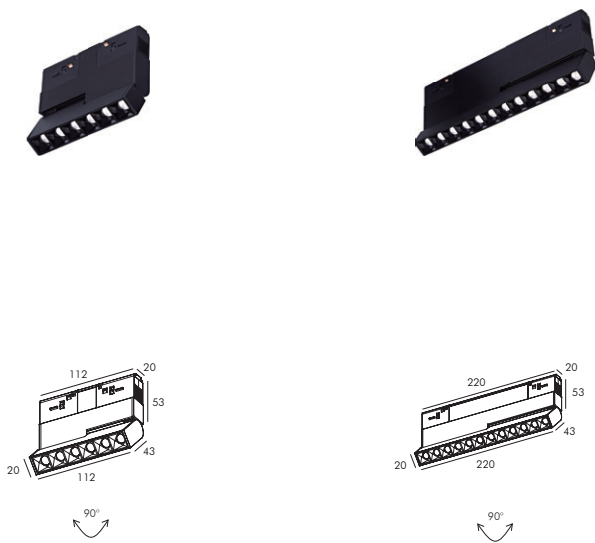

GD2004/6 x 1.5W

LED: OSRAM SMD
Power: 6x1.5W
Flux(Lm): 739Lm
Angle: 24°/15°/35°
CTN: 30
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC

GD2005/12 x 1.5W

LED: OSRAM SMD
Power: 12x1.5W
Flux(Lm): 1386Lm
Angle: 24°/15°/35°
CTN: 20
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC

Colortemperature




Color

■ Sand Black

IP 20	CRI 90	DC48V
----------	-----------	-------



PRATO

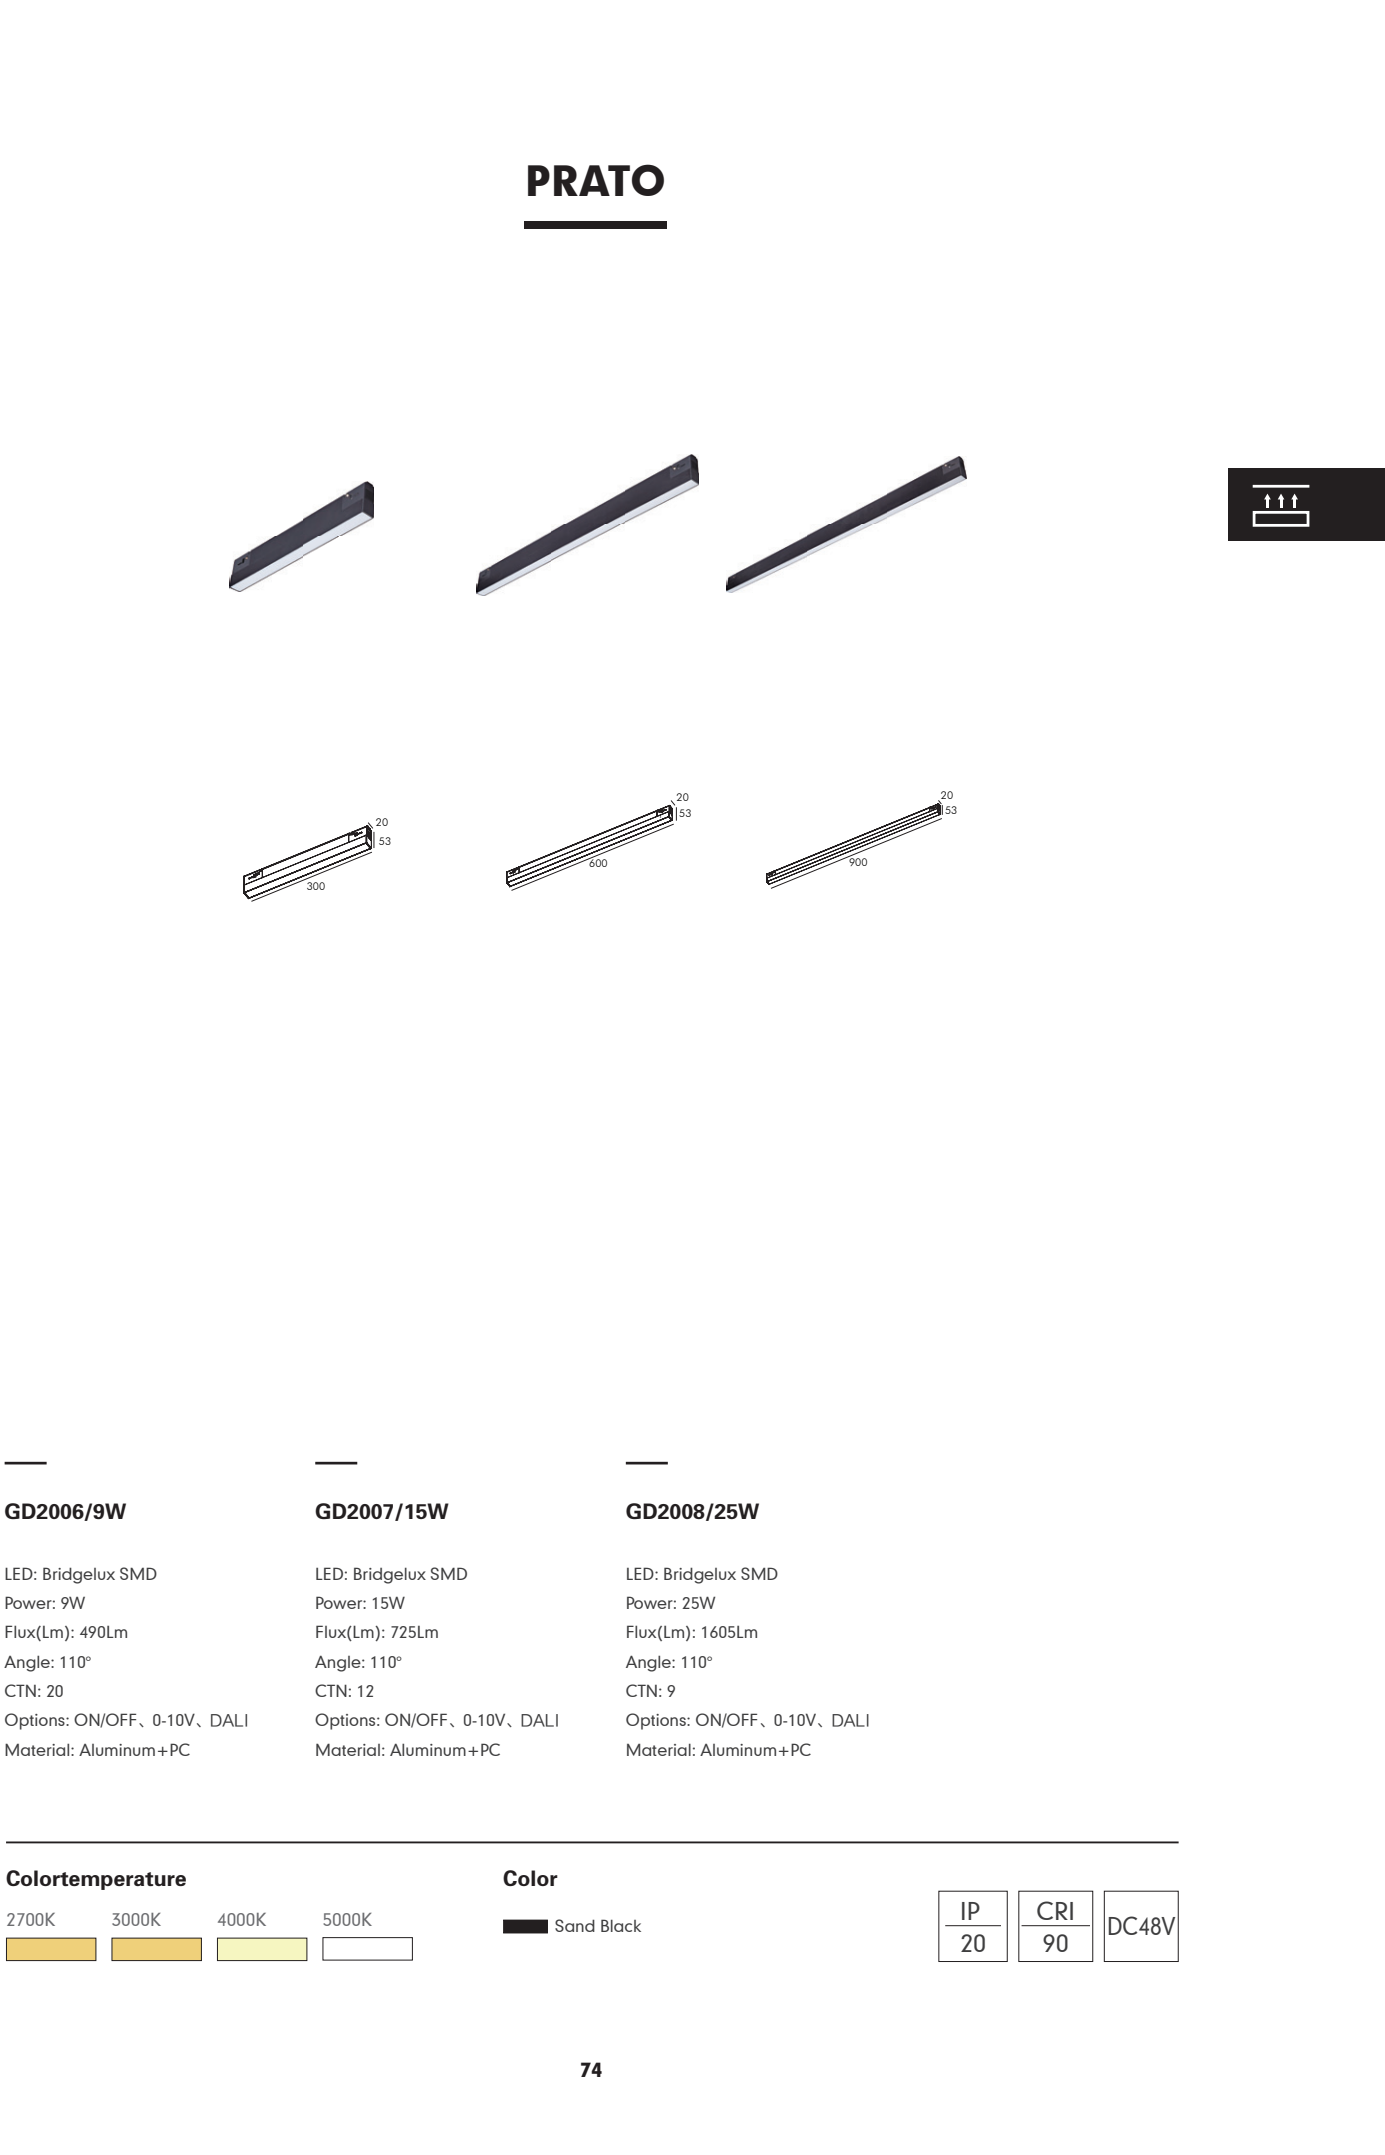

PRATO

GD2006/9W

LED: Bridgelux SMD
Power: 9W
Flux(Lm): 490Lm
Angle: 110°
CTN: 20
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC

GD2007/15W

LED: Bridgelux SMD
Power: 15W
Flux(Lm): 725Lm
Angle: 110°
CTN: 12
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC

GD2008/25W

LED: Bridgelux SMD
Power: 25W
Flux(Lm): 1605Lm
Angle: 110°
CTN: 9
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC

Colortemperature



Color


■ Sand Black

IP 20	CRI 90	DC48V
----------	-----------	-------

PRATO



PRATO

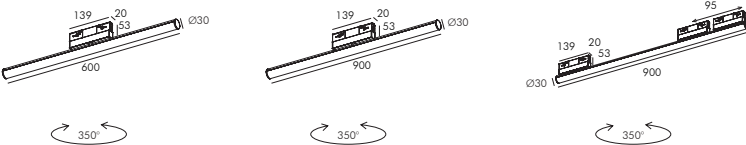

GD2010/13W

LED: Bridgelux SMD
Power: 13W
Flux(Lm): 1258Lm
Angle: 110°
CTN: 20
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC

GD2011/20W

LED: Bridgelux SMD
Power: 20W
Flux(Lm): 1840Lm
Angle: 110°
CTN: 12
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC

GD2012/20W

LED: Bridgelux SMD
Power: 20W
Flux(Lm): 1840Lm
Angle: 110°
CTN: 12
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC

Colortemperature






Color

■ Sand Black

IP 20	CRI 90	DC48V
----------	-----------	-------

PRATO



GD2019/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 606Lm
Angle: 24°/15°/35°
CTN: 30
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC

GD2020/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 1048Lm
Angle: 24°/15°/35°
CTN: 30
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC

GD2021/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1870Lm
Angle: 24°/15°/35°
CTN: 20
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC

Colortemperature




Color

- Sand Black
- Sand White+ Black
- Rose Gold+ Black


IP	CRI	DC48V
20	90	

PRATO




GD2022/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 537Lm
Angle: 24°/15°/35°
CTN: 30
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC



GD2023/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 886Lm
Angle: 24°/15°/35°
CTN: 30
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC



Colortemperature






Color

- Sand Black

IP	CRI	DC48V
20	90	

PRATO



GD2024/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 740Lm
Angle: 24°/15°/35°
CTN: 20
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC

GD2025/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1345Lm
Angle: 24°/15°/35°
CTN: 12
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC

GD2026/25W

LED: Bridgelux COB
Power: 25W
Flux(Lm): 1802Lm
Angle: 24°/15°/35°
CTN: 12
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC

Colortemperature







Color

Sand Black

IP	CRI	DC48V
20	90	

PRATO



GD2027/7W

LED: CREE SMD
Power: 7W
Flux(Lm): 438-463Lm
Angle: 15°-45°
CTN: 30
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC

GD2028/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 782-818Lm
Angle: 15°-60°
CTN: 30
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC

GD2029/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1540-1619Lm
Angle: 15°-60°
CTN: 12
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC

GD2030/25W

LED: Bridgelux COB
Power: 25W
Flux(Lm): 1877-1955Lm
Angle: 15°-60°
CTN: 12
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC

Colortemperature




Color

Sand Black
Sand White+Black
Sand Black+ Silver

IP	CRI	DC48V
20	90	




PRATO

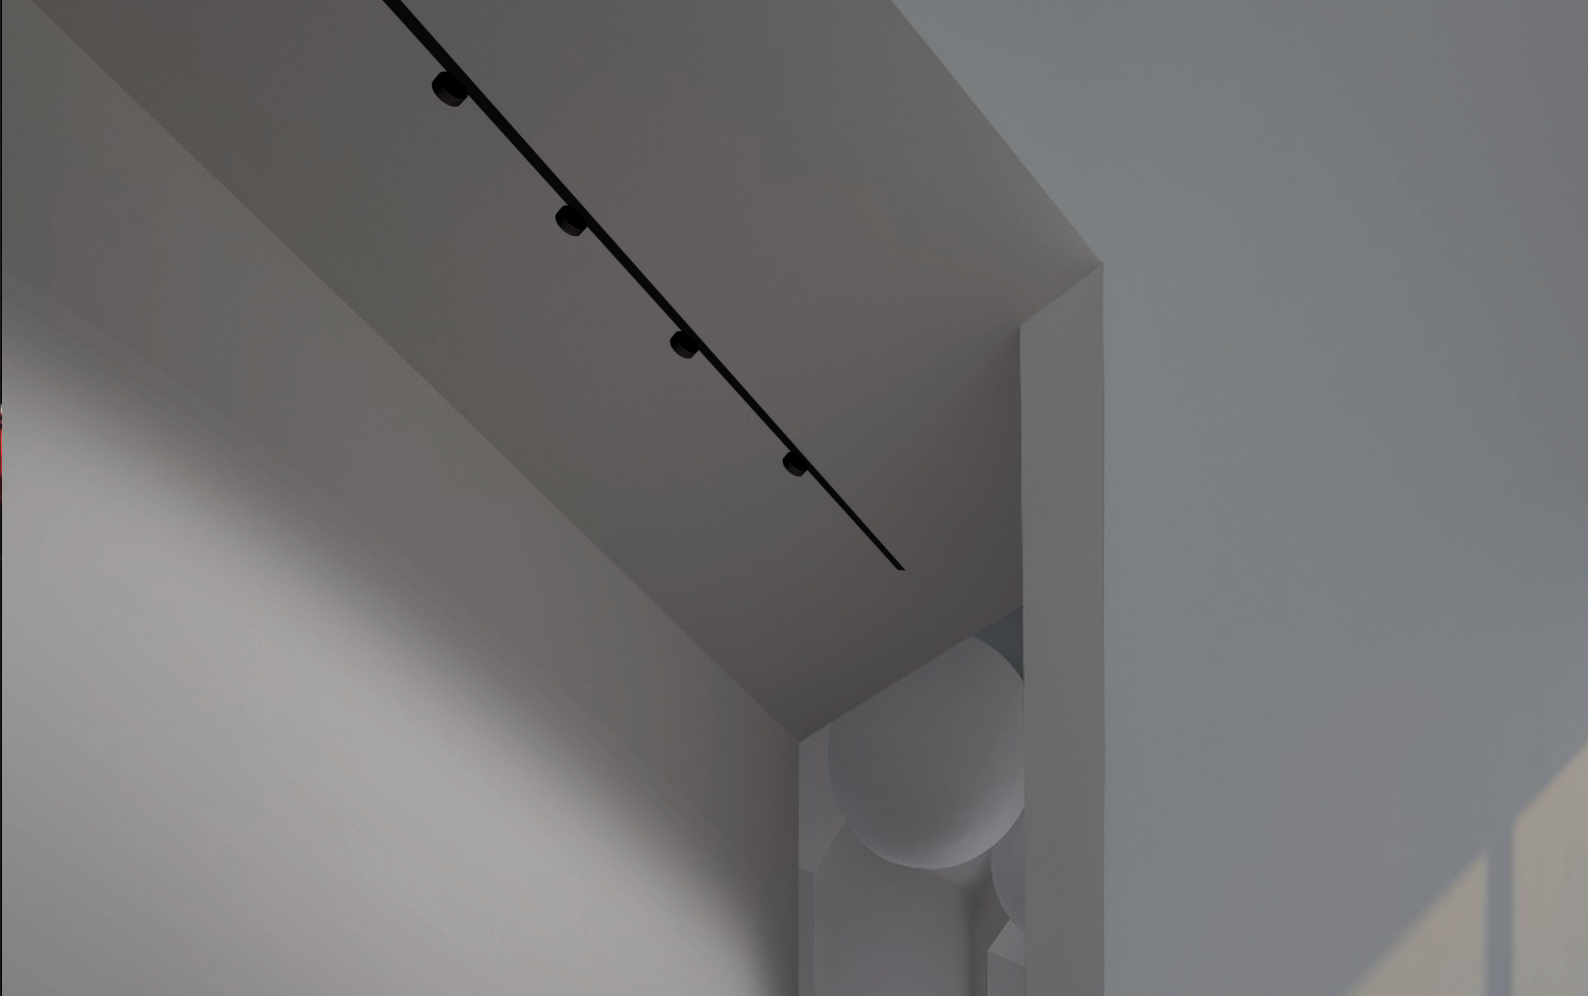

GD2031/28W

LED: Bridgelux COB
Power: 28W
Flux(Lm): 1179Lm/1607Lm
Angle: 15°-21°
CTN: 8
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC



Colortemperature



Color


■ Sand Black

IP	CRI	DC48V
20	90	



GD2033/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 979Lm
Angle: 30°×50°
CTN: 20
Options: ON/OFF、0-10V、DALI
Material: Aluminum+PC




Colortemperature



Color

■ Sand Black


IP	CRI	DC48V
20	90	

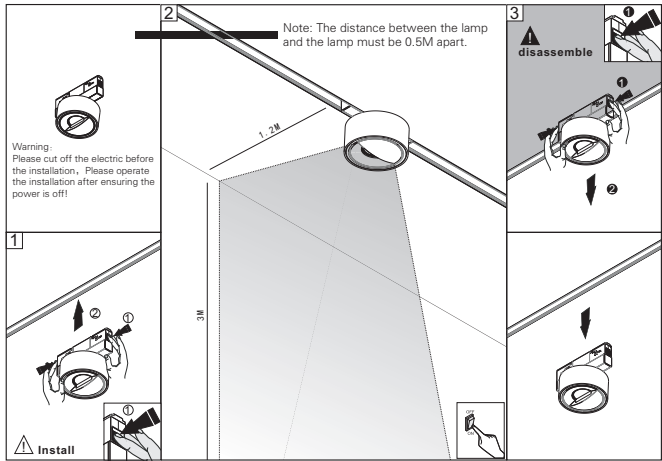

PRATO




PRATO




GD2015/6W

LED: Bridgelux COB
Power: 6W
Flux(Lm): 437Lm
Angle: 24°/15°/35°
CTN: 20
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC



GD2018/6W

LED: Bridgelux COB
Power: 6W
Flux(Lm): 564Lm
Angle: 24°
CTN: 20
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC



GD2032/5W

LED: Bridgelux SMD
Power: 5W
Flux(Lm): 425Lm
Angle: 20°/35°
CTN: 20
Options: ON/OFF, 0-10V, DALI
Material: Aluminum+PC

Colortemperature




Color (GD2015/18) Color (GD2032)

■ Sand Black ■ Sand Black+Rose Gold

IP 20	CRI 90	DC48V
----------	-----------	-------


PRATO



GD-A3 Power head

CTN: 30
Material: PC


Black



GD-A3 Power Connector

CTN: 30
Material: PC


Black



GD Power Corner Connector

CTN: 30
Material: PC


Black



RNDP150U48-4X

AC: 220-240V
DC: 48V 150W
CTN: 20


Sand Black



GD-Messenger wire suite

CTN: 20
Material: Aluminum


Sand Black



GD-Q48V/Corner

CTN: 20
Material: Aluminum


Sand Black



GD-Q48V/Inner Corner

CTN: 20
Material: Aluminum

Sand Black




GD-Q48V/Out Conner

CTN: 20
Material: Aluminum

Sand Black


PRATO



GD-N48V/Corner

CTN: 20
Material: Aluminum


Sand Black



GD-N48V/Inner Corner

CTN: 20
Material: Aluminum


Sand Black



GD-N48V/Out Conner

CTN: 20
Material: Aluminum


Sand Black



GD-M48V/Corner

CTN: 20
Material: Aluminum


Sand Black



GD-M48V/Inner Corner

CTN: 20
Material: Aluminum


Sand Black



GD-M48V/Out Conner

CTN: 20
Material: Aluminum


Sand Black



GD Decorative parts

CTN: /
Material: PC

Black



GD-Connection part

CTN: /
Material: Iron


Sand Black




BURANO SERIES

DC48V

BURANO



GCCX-N1000/2000/3000 Track
CTN: 5
Material: Aluminum
■ Sand Black




GCCX-M1000/2000/3000 Track
CTN: 5
Material: Aluminum
■ Sand Black



BURANO




BURANO



GCCX-MZ01/6 x 1W

LED: OSRAM SMD
Power: 6x1W
Flux(Lm): /
Angle: 24°/36°
CTN: 20
Material: Aluminum+PC



GCCX-MZ02/12 x 1W

LED: OSRAM SMD
Power: 12x1W
Flux(Lm): /
Angle: 24°/36°
CTN: 20
Material: Aluminum+PC


Colortemperature



Color


 Sand Black

IP	CRI	DC48V
20	90	



GCCX-MZ03/6 x 1W

LED: OSRAM SMD
Power: 6x1W
Flux(Lm): /
Angle: 24°/36°
CTN: 40
Material: Aluminum+PC



GCCX-MZ04/12 x 1W

LED: OSRAM SMD
Power: 12x1W
Flux(Lm): /
Angle: 24°/36°
CTN: 40
Material: Aluminum+PC

Colortemperature



Color


 Sand Black

IP	CRI	DC48V
20	90	



BURANO

91

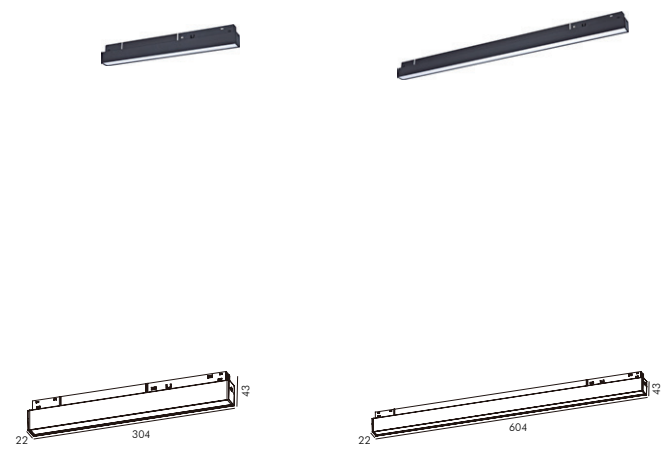

GCCX-MZ05/10W

LED: SX SMD
Power: 10W
Flux(Lm): /
Angle: 120°
CTN: 30
Material: Aluminum+PC

GCCX-MZ06/18W

LED: SX SMD
Power: 18W
Flux(Lm): /
Angle: 120°
CTN: 20
Material: Aluminum+PC

Colortemperature



Color



 Sand Black

IP 20	CRI 90	DC48V
----------	-----------	-------

92



BURANO



GCCX-MZ07/10W

LED: HL COB
Power: 10W
Flux(Lm): /
Angle: 15°/24°36°
CTN: 20
Material: Aluminum+PC


Colortemperature



Color

■ Sand Black

IP	CRI	DC48V
20	90	



GCCX-MZ09/7W

LED: HL COB
Power: 7W
Flux(Lm): /
Angle: 24°
CTN: 30
Material: Aluminum+PC

Colortemperature



Color

■ Sand Black

IP	CRI	DC48V
20	90	

BURANO



GCCX Power head

CTN: 100
Material: PC

■ Black



GCCX Power Connector

CTN: 100
Material: PC

■ Black



GCCX Power Connector

CTN: 100
Material: PC

■ Black



GCCX-100W power supply

CTN: 48
Material: Aluminum+PC

■ Sand Black



GCCX-200W power supply

CTN: 36
Material: Aluminum+PC

■ Sand Black

BURANO



GCCX-N Corner

CTN: 30
Material: Aluminum

■ Sand Black



GCCX-N InnerCorner

CTN: 30
Material: Aluminum

■ Sand Black



GCCX-N Connection part

CTN: 30
Material: Iron

■ Plate Zinc



GCCX-M Corner

CTN: 30
Material: Aluminum

■ Sand Black



GCCX-M Inner Corner

CTN: 30
Material: Aluminum

■ Sand Black



GCCX-M Connection part

CTN: 30
Material: Aluminum

■ Oxidation Black